

RS Low Voltage Momentary Switch

Two button low voltage momentary switch

Optional key-operated models available



Normally open 3 Amp, 28 VAC contacts

Four versions available:
unlighted
locator light
pilot light
raise/lower

PROJECT

LOCATION/TYPE


Description & Operation

The RS2 switch is a low voltage momentary push-button switch used for controlling lighting with Watt Stopper lighting control panels. The 2 button switch includes 2 normally open 3 Amp 28 VAC contacts that provide single-pole, double-throw momentary operation. When the top button is pushed, the switch makes a contact closure, sending an ON signal to connected devices. When the bottom button is pushed, an OFF signal is sent. In the switch's normal position, both buttons are inactivated.

Specifications

- Normally open 3 Amp, 28 VAC contacts
- Single-pole, double-throw configuration
- Installs in mounting brackets with cover plates or snap-in mounting in control panels (.76" x 1.28" rectangular hole required)
- Uses 0.186" quick connectors for easy installation (included with switch)
- Size: 1.15" D x .88" W x 1.38" H (29.2mm x 22.4mm x 35.1mm)
- CSA certified, one year warranty

Dimensions

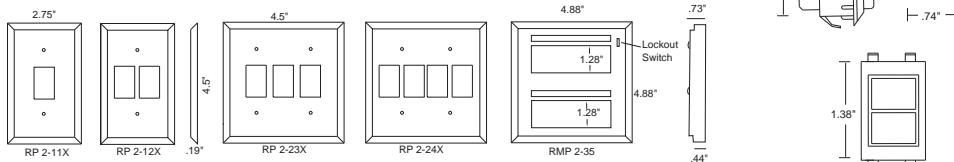

Product Overview