


Spectrum Master™ MS2711D


Fast, Accurate, Repeatable, Portable Spectrum Analysis

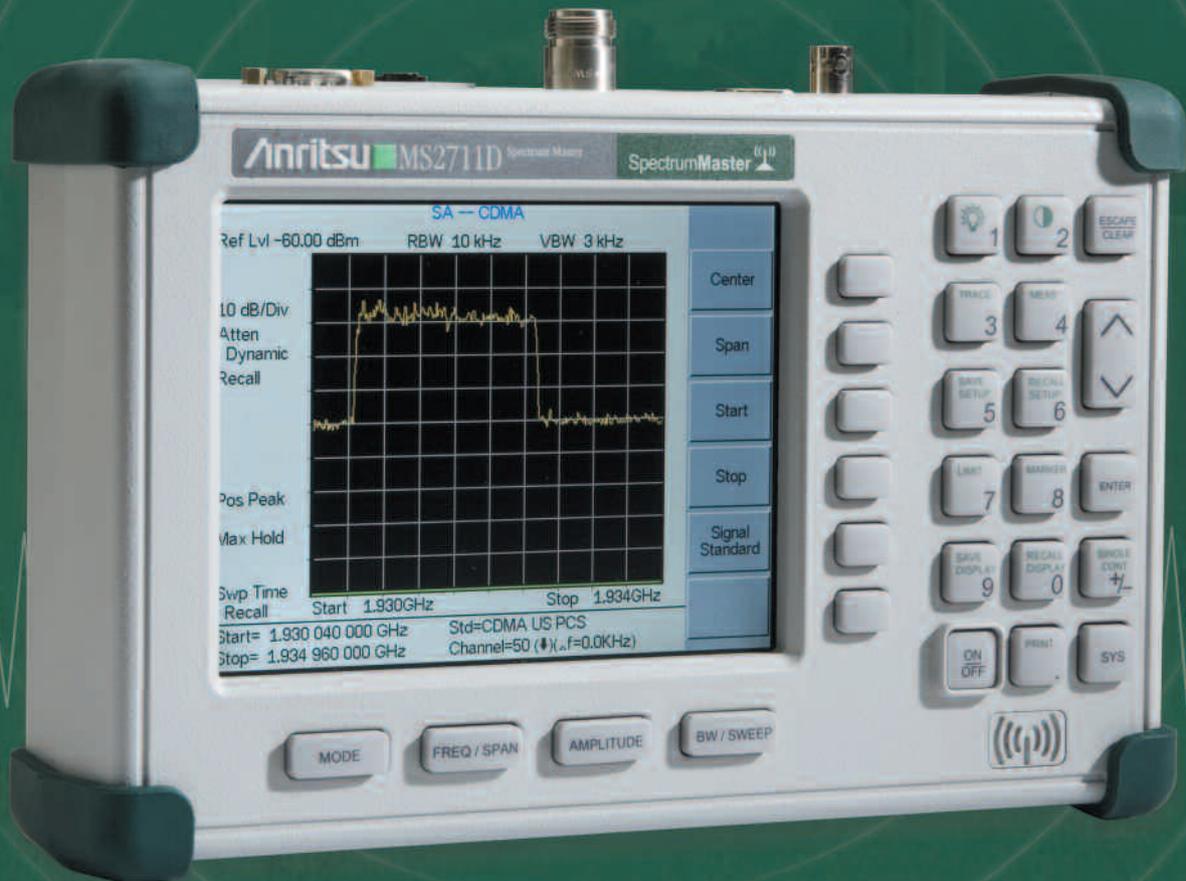

Accurate | Rugged | Easy to use – Powerful

The Anritsu Spectrum Master MS2711D provides ultimate measurement flexibility in a package that is ruggedized for field environments and light enough for mobile applications. Unlike traditional spectrum analyzers, the MS2711D features a rugged, ultra-lightweight, battery-operated design that allows users to conduct spectrum analysis measurements – anywhere, anytime.

With the MS2711D, you can locate, identify, record, and solve communication systems problems quickly and easily, and with incredible accuracy. Whether you are installing, maintaining, or troubleshooting, the MS2711D provides exceptional performance combined with ease-of-use and broad functionality – making it a perfect solution for conducting field measurements in the 100 kHz to 3.0 GHz frequency range. For instance, it is perfect for locating the source of interfering signals. The addition of Option 25, Interference Analysis, makes the instrument particularly well suited for the application.

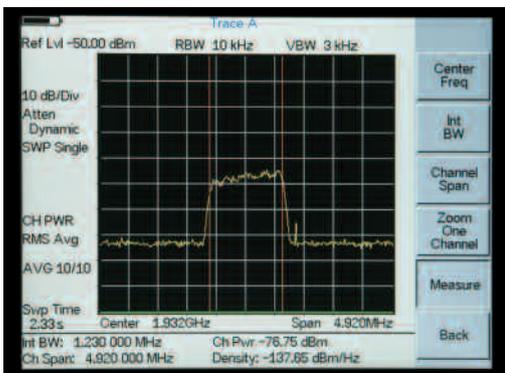

Rugged and Reliable

Because the MS2711D was designed specifically for field environments, it can easily withstand the day-to-day punishment of field use. The analyzer is almost impervious to the bumps and bangs typically encountered by portable field-based equipment.

Easy-to-Use

At less than five pounds, the MS2711D is the lightest fully-functional spectrum analyzer available. Operation is straightforward; measurements are obtained through a menu-driven user interface that is easy to use and requires little training. The daylight viewable TFT display is large and high-resolution, making interpreting test results easy and quick.

A full range of marker capabilities — such as peak, center, and delta functions — give users fast and comprehensive analysis of displayed signals. Limit lines simplify amplitude measurements, allowing users to create quick, simple, pass/fail tests. Frequency, span, and amplitude functions are easily configured for optimum performance. Used together with the Save Setup feature, these functions make testing easier and faster for users of all experience levels.

Spectrum Analysis For Field Applications

Options

The MS2711D's capabilities expand to meet your needs. Available options include a built-in bias tee (option 10) for biasing amplifiers under test, a frequency converter controller module (option 6) to drive Anritsu frequency extension modules, an internal signal source (option 21) for transmission measurements, and an internal power meter (option 29) for accurate power measurement. External power monitor (option 5) for broadband power measurements to 50 GHz, and interference analysis (option 25) to provide a spectrogram display of signals over time, RSSI and signal strength with audible indicator. Also available are a Channel Scanner (option 27), CW Signal Generator (option 28), and a built-in GPS receiver (option 31).

Powerful Trace Management

The unit's internal memory stores up to 10 test setups and 300 measurement traces. The stored data can be easily downloaded to a personal computer (PC) or a printer via an RS-232 serial cable. A notebook computer can be used with the RS-232 interface for automated control and data collection in the field. Handheld Software Tools™ is a powerful data analysis software that comes with every MS2711D. This software allows you to print professional reports for your customers documenting your measurements and saving the traces for future comparison.



≤-135 dBm Noise Floor

To meet the challenges of today's wireless systems, the revolutionary MS2711D handheld spectrum analyzer incorporates a pre-amp which increases the analyzer's sensitivity and dynamic range, and improves measurement time. The built-in pre-amp makes the MS2711D particularly effective in measuring low-level signals.

The handheld spectrum analyzer's sensitivity is ≤-135 dBm (100 Hz RBW; full span). With the preamplifier turned on, the MS2711D can identify and make measurements on low-level signals much faster than previously possible.

+43 dBm Maximum Safe Input Level

Unlike any other spectrum analyzer on the market today, the MS2711D can tolerate an input signal of +43 dBm (20 watts) – without damage. You can be assured that the MS2711D can survive in even the toughest RF environments.

Light Weight

Weighing less than five pounds fully loaded including a NiMH battery, this fully functional handheld spectrum analyzer is light enough to take anywhere, including up a tower.

“Smart” Measurements

The MS2711D has dedicated routines for one-button measurements of field strength, channel power, occupied bandwidth, Adjacent Channel Power Ratio (ACPR), C/I, and interference analysis. These are increasingly critical measurements for today's wireless communication systems. The simple interface for these complex measurements significantly reduces test time and increases analyzer usability.



Fast Sweep Speed

The MS2711D can do a full span sweep in ≤ 1.1 seconds, and sweep speed in zero span can be set from less than 50 μ s up to 200 seconds. Fast sweeps simplify the capture of intermittent interfering signals.

AM/FM/SSB Demodulator


A built-in demodulator for AM, narrowband FM, wideband FM and single sideband (selectable USB and LSB) allows a technician to easily identify interfering signals.

Dynamic Attenuation

With Dynamic Attenuation enabled, the MS2711D automatically activates or de-activates the built-in preamplifier according to the overall input signal amplitude. Dynamic attenuation tracks the input signal level, automatically adjusting the attenuation level to protect the MS2711D in situations of high RF signal levels, or enhancing the instrument's sensitivity in situations of low-level RF signal input.


Transmission Measurement (option 21)

An optional built-in 25 MHz to 3 GHz signal source provides the capability to measure loss or gain of two-port devices such as filters, cables, attenuators and amplifiers.

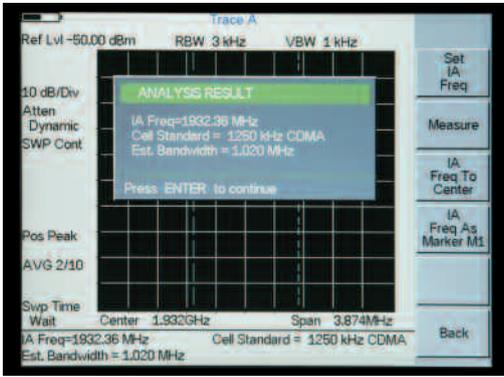


Carrier to Interference Measurement

As more 802.11 access points are installed, there will be an increasing level of interference in the 2.4 GHz band occupied by this service and other devices such as cordless telephones. This measurement capability makes it simple for an access point installer to determine if the level of interference is sufficient to cause difficulty for users in the intended service area, and can show the need to change to another access channel.

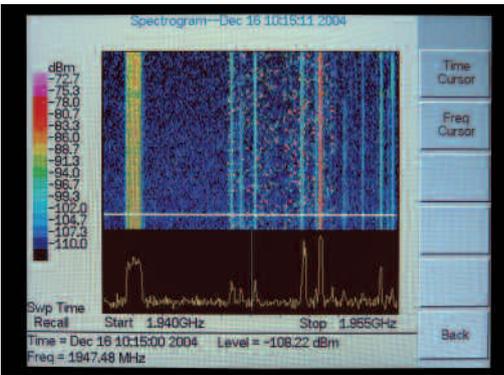


Interference Analysis

Interference Analysis is option 25 in the MS2711D. The capabilities delivered by this option are a spectrogram display that shows multiple sweeps over time with color being used to show signal amplitude. This is a powerful means of seeing interfering signals as they come and go. A received signal strength indicator (RSSI) is part of this option. RSSI shows a graph of the signal strength at a single frequency over time. Also included is an audible signal strength indicator used with a directional antenna to determine the direction of arrival of a signal. The audible output can be heard using the built-in speaker or, for privacy, a set of headphones.

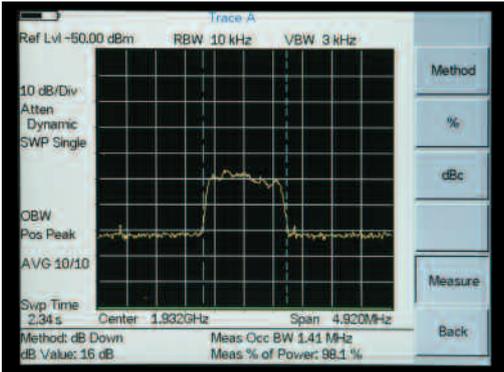

Occupied Bandwidth

This measurement calculates the bandwidth containing the total integrated power occupied in a given signal bandwidth. There are two different methods of calculation depending on the technique used to modulate the carrier. The user can specify percent of power or the “x” dB down point, where “x” can be from 3 dB to 120 dB below the carrier.

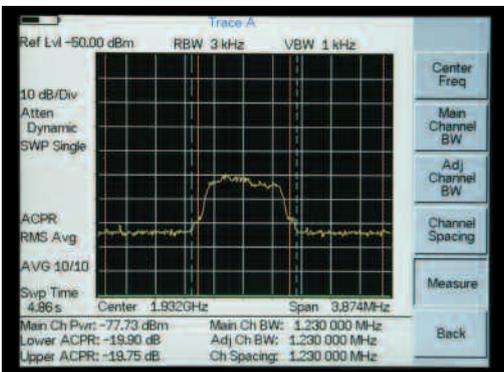


Adjacent Channel Power Ratio

A common transmitter measurement is that of adjacent channel leakage power. This is the ratio of the amount of leakage power in an adjacent channel to the total transmitted power in the main channel. This measurement is used to replace the traditional two-tone intermodulation distortion (IMD) test for system non-linear behavior.

The result of an ACPR measurement can be expressed either as a power ratio or a power density. In order to calculate the upper and lower adjacent channel values, the MS2711D allows the adjustment of four parameters to meet specific measurement needs: main channel center frequency, measurement channel bandwidth, adjacent channel bandwidth and channel spacing. When an air interface standard is specified in the MS2711D, all these values are automatically set to the normal values for that standard.

Spectrum Master – Fast, Accurate, Repeatable, Portable Spectrum Analysis

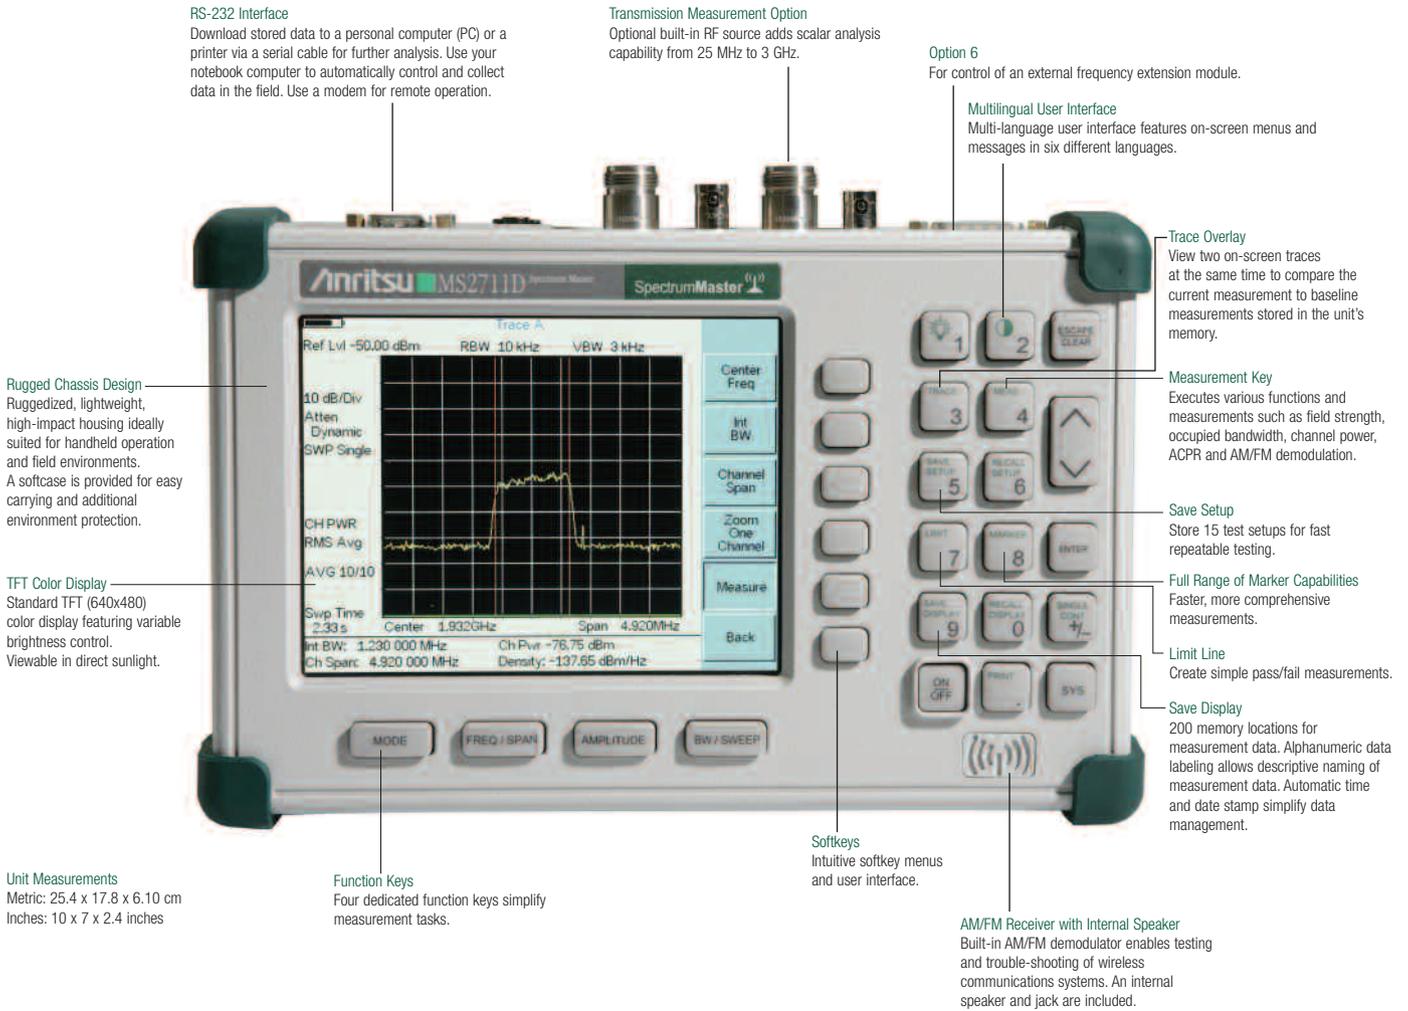


Flexibility and Ease of Use

The FCN4760 is a block down converter for the 4.7 to 6.0 GHz frequency range. It is designed to work with an Anritsu Spectrum Master MS2711D equipped with Option 6.

This converter is primarily intended for field use by fixed wireless engineers who are responsible for the design, deployment and optimization of 802.11a networks. It is also used to conduct interference analysis measurements to determine the level of interference and locate the sources of interference.



MS2711D Spectrum Master with FCN4760 block down converter

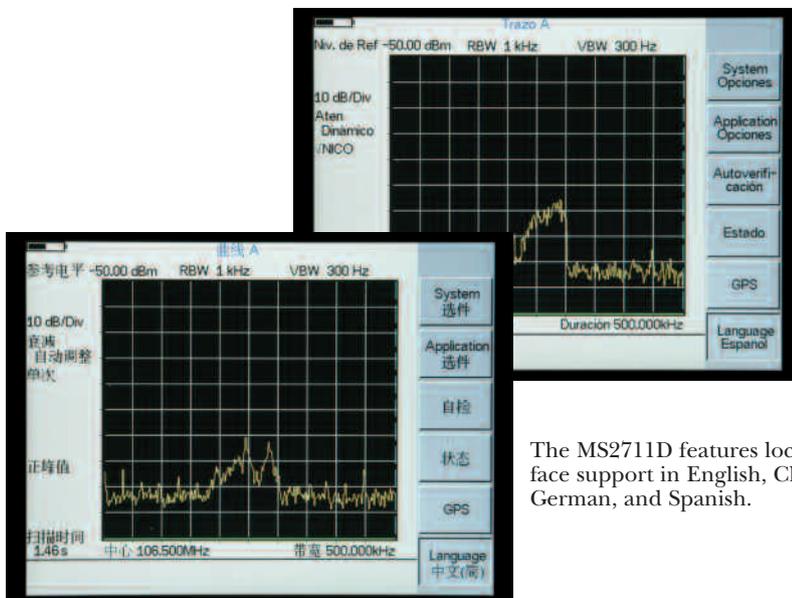

The MS2711D features local language graphical user interface support in English, Chinese, Japanese, French, German, and Spanish.

Specifications

Frequency

Frequency Range: 100 kHz to 3.0 GHz (tuneable to 9 kHz)
Frequency Reference: Aging: ± 1 ppm/yr, Accuracy: ± 2 ppm
Frequency Span: 10 Hz to 2.99 GHz in 1, 2, 5 step selections in auto mode, plus zero span
Sweep Time: ≤ 1.1 sec full span; ≤ 50 μ sec to 20 sec selectable in zero span
Resolution bandwidth (-3 dB width): 100 Hz to 1 MHz in 1-3 sequence, $\pm 5\%$
Video bandwidth (-3 dB): 3 Hz to 1 MHz in 1-3 sequence, $\pm 5\%$ typical
SSB Phase Noise (1 GHz) at 30 kHz Offset: ≤ -75 dBc/Hz
Spurious Responses Input Related: ≤ -45 dBc
Spurious Residual Responses: ≤ -90 dBm, ≥ 10 MHz
 ≤ -80 dBm, < 10 MHz
(10 kHz RBW, pre-amp on)

Amplitude

Total Level Accuracy:
 ± 1 dB typical (± 1.5 dB max), ≥ 10 MHz to 3 GHz,
 ± 2 dB typical < 10 MHz for input signal levels
 ≥ -60 dBm, excluding input VSWR mismatch
Measurement Range: $+20$ dBm to -135 dBm
Input Attenuator Range: 0 to 51 dB, selected manually or automatically coupled to the reference level. Resolution in 1 dB steps.
Displayed Average Noise Level
(Input terminated, 0 dB atten.,
RMS detection, 100 Hz RBW): ≤ -135 dBm, ≥ 10 MHz (preamp on)
 ≤ -115 dBm, < 10 MHz (preamp on)
Dynamic Range: > 65 dB, typical
Display Range: 1 to 15 dB/division, in 1 dB steps,
10 divisions displayed
Scale Units: dBm, dBV, dBmV, dB μ V, V, W
RF Input VSWR: (with ≥ 20 dB attenuation), 1.5:1 typical, (10 MHz to 2.4 GHz)

General

Internal Trace Memory: 300 maximum
Setup Storage: 10 test setups
Display: VGA Monochrome or VGA Color (option 3) with adjustable backlight
Inputs and Outputs Ports:
RF Out: Type N, female, 50Ω
Maximum Input without Damage: $+23$ dBm, ± 50 VDC
RF In: Type N, female, 50Ω
Maximum Input without Damage: $+43$ dBm (peak), ± 50 VDC
Serial Interface: RS-232 9 pin D-sub, three wire serial
Electromagnetic Compatibility: Meets European community requirements for CE marking
Safety: Conforms to EN 61010-1 for Class 1 portable equipment
Temperature:
Operating: -10°C to 55°C , humidity 85% or less
Non-operating: -51°C to $+71^\circ\text{C}$ (Recommend the battery be stored separately between 0°C and 40°C for any prolonged storage period.)
Environmental: MIL-PRF-28800F Class 2
Power Supply:
External DC Input: $+12.5$ to $+15$ volts dc, 3A max
Internal: NiMH battery: 10.8 volts, 1800 mAh
Dimensions:
Size (W x H x D): 25.4 cm x 17.8 cm x 6.10 cm (10.0 in x 7.0 in x 2.4 in)
Weight: 2.14 kg (4.7 lbs.) includes battery, 2.28 kg (5 lbs)
includes transmission measurement signal source

Options

Option 5 – Power Monitor (requires external detector)

Detector Range: 1A peak 150 ms, 300 mA max steady state
Offset Range: -50 to +20 dBm, 10 nW to 100 nW
Display Range: -80 to 80 dBm
Resolution: 0.1 dB, 0.1 xW
Measurement Accuracy: ± 1 dB maximum for > -40 dBm and < 18 GHz

Option 6 – Frequency Converter Control Module

Connector providing internal control signals to drive an external Anritsu frequency extension module

Option 10A – Bias Tee Specifications

Voltage: 12 to 24 Vdc
Power: 6 W max, steady state

Option 21 – Transmission Measurement Specifications

Frequency Range: 25 MHz to 3 GHz
Frequency Resolution: 10 Hz
Output Power Level: -10 dBm typical
Dynamic Range: 80 dB, 25 MHz to 2 GHz
60 dB, > 2 GHz to 3 GHz
(when using dynamic attenuation)
Output Impedance: 50Ω

Option 25 – Interference Analyzer

Signal Strength with audible tone option
RSSI
Spectrogram

Option 27 – Channel Scanner

Frequency Range: 100 kHz to 3.0 GHz
Frequency Accuracy: ± 10 Hz + Time base error, 99% Confidence level
Measurement Range: +20 dBm to -110 dBm
Channel Power: ± 1 dB typical (± 1.5 dB max)
Adjacent Channel Power Accuracy: ± 0.75 dBc

Option 28 – CW Signal Generator

Requires CW Signal Generator Kit

Option 29 – Power Meter Specifications

Frequency Range: 3 MHz to 3.0 GHz
Measurement Range: -80 dBm to +20 dBm
(+80 dBm with 60 dB external attenuator)
Display Range: -80 dBm to +80 dBm
Offset Range: 0 to +60 dB
Accuracy**: ± 1 dB typical (± 1.5 dBm max), ≥ 10 MHz to 3 GHz
 ± 2 dB typical, 3 MHz to < 10 MHz
VSWR: 1.5:1 typical ($P_{in} > -30$ dBm, > 10 MHz to 2.4 GHz)
Maximum Power: +20 dBm (0.1W) without external attenuator
**(Excludes Input VSWR)

Option 31 – GPS

GPS Location Indicator
Latitude, Longitude and Altitude on Display
Latitude, Longitude and Altitude with trace storage

FCN4760 – Frequency Converter Specifications

Frequency:
Frequency Range: 4.7 GHz to 6 GHz
Frequency Resolution: 10 Hz
Frequency Reference: Aging ± 1 ppm/yr
Accuracy: ± 2 ppm
SSB Phase Noise (6 GHz) at 30 kHz Offset: ≤ -65 dBc/Hz
Spurious Responses Input Related: ≤ -45 dBc
Spurious Residual Responses: ≤ -90 dBm

Amplitude:

Measurement Range: -40 dBm to -100 dBm
Sensitivity (displayed average noise level): -100 dBm
Accuracy: ± 1.25 dB typical (± 1.75 dB max.)
Maximum Input Level without Damage: -5 dBm

General:

Input and Output Ports: RF In: Type N, female, 50Ω
RF Out (to MS2711D): Type N, male, 50Ω
Communication Interface: Proprietary

Electromagnetic Compatibility: Meets European community requirements for CE marking
Safety: Conforms to EN 61010-1 for Class 1 portable equipment

Operating Temperature: -10°C to 50°C , humidity 85% or less -50°C to -80°C
Power Dissipation: 850 mW max

Dimensions:

Size (W x H x D): 6.6 cm x 10.9 cm x 3.3 cm (2.6 in. x 4.3 in. x 1.3 in.)
Weight: < 0.45 kg (< 1 lb.)

Ordering Information

Model: MS2711D - Handheld Spectrum Analyzer: 100 kHz to 3 GHz

Standard Accessories Include

10580-00097 MS2711D Spectrum Master User's Guide
 48258 Soft Carrying Case
 40-168 AC – DC Adapter with Power Cord
 806-62 Automotive Cigarette Lighter/12 Volt DC Adapter
 2300-347 Handheld Software Tools CDROM

Serial Interface Cable

Rechargeable battery, NiMH
 Daylight viewable TFT color display now included at no extra charge
 One Year Warranty

Options

Option 5 Power Monitor (requires external detector)
 Option 6 Frequency Converter Control Module
 Option 10A Bias Tee
 Option 21 Transmission Measurement
 Option 25 Interference Analyzer (best with directional antenna)
 Option 27 Channel Scanner
 Option 28 CW Signal Generator (requires CW Signal Generator Kit p/n: 61534)
 Option 29 Power Meter
 Option 31 GPS (requires GPS antenna)

Optional Accessories

FCN4760 Frequency Converter, 4.7 to 6.0 GHz
 42N50A-30 30 dB, 50 Watt, Bi-directional, DC to 18 GHz, N(m) to N(f) Attenuator
 34NN50A Precision Adapter, DC to 18 GHz, 50Ω, N(m) to N(m)
 34N50A Precision Adapter, DC to 18 GHz, 50Ω, N(f) to N(f)
 15NN50-1.5C Test port cable armored, 1.5 meter, N(m) to N(m), 6 GHz
 15NN50-3.0C Test port cable armored, 3.0 meter, N(m) to N(m), 6 GHz
 15NN50-5.0C Test port cable armored, 5.0 meter, N(m) to N(m), 6 GHz
 15N50-1.5C Test port cable armored, 1.5 meter, N(m) to N(f), 6 GHz
 15N50-3.0C Test port cable armored, 3.0 meter, N(m) to N(f), 6 GHz
 15N50-5.0C Test port cable armored, 5.0 meter, N(m) to N(f), 6 GHz
 15ND50-1.5C Test port cable armored, 1.5 meter, N(m) to 7/16 DIN(m), 6.0 GHz
 15ND50-1.5C Test port cable armored, 1.5 meter, N(m) to 7/16 DIN(f), 6.0 GHz

510-90 Adapter, 7/16 DIN (f) to N(m), DC to 6.0 GHz, 50Ω
 510-91 Adapter, 7/16 DIN (f)-N(f), DC to 6.0 GHz, 50Ω
 510-92 Adapter, 7/16 DIN (m)-N(m), DC to 6.0 GHz, 50Ω
 510-93 Adapter, 7/16 DIN(m)-N(f), DC to 6.0 GHz, 50Ω
 510-96 Adapter 7/16 DIN (m) to 7/16 DIN (m), DC to 6.0 GHz, 50Ω

1030-109 Filter, Bandpass, 836.5 MHz Ctr Freq, 25.8 MHz BW, N(m) to SMA(f), 50Ω
 1030-110 Filter, Bandpass, 897.5 MHz Ctr Freq, 35 MHz BW, N(m) to SMA(f), 50Ω
 1030-111 Filter, Bandpass, 1.88 GHz Ctr Freq, 63.1 MHz BW, N(m) to SMA(f), 50Ω
 1030-112 Filter, Bandpass, 2.442 GHz Ctr Freq, 85.1 MHz BW, N(m) to SMA(f), 50Ω

61534

CW Signal Generator Kit with variable step attenuator

510-97 Adapter 7/16 DIN (f) to 7/16 DIN (f), 7.5 GHz
 48258 Spare soft carrying case
 40-168 Spare AC/DC adapter
 806-62 Spare automotive cigarette lighter/12 Volt DC adapter
 800-441 Spare serial interface cable
 760-235 Transit case for Anritsu Handheld Spectrum Analyzer
 2300-347 Anritsu Handheld Software Tools CDROM
 10580-00097 MS2711D Spectrum Master User's Guide (spare)
 10580-00098 MS2711D Spectrum Master Programming Manual
 10580-00099 MS2711D Spectrum Master Maintenance Manual
 633-27 Rechargeable battery, NiMH
 551-1691 USB to Serial adapter
 70-28 Headset

2000-1029 Battery charger, NiMH with universal power supply
 2000-1030 Portable antenna, 50Ω, SMA(m) 1.71-1.88 GHz
 2000-1031 Portable antenna, 50Ω, SMA(m) 1.85-1.99 GHz
 2000-1032 Portable antenna, 50Ω, SMA(m) 2.4-2.5 GHz
 2000-1035 Portable antenna, 50Ω, SMA(m) 896-941 MHz
 2000-1200 Portable antenna, 50Ω, SMA(m) 806-869 MHz

2000-1473 SMA(m), 870 to 960 MHz, 50Ω
 2000-1474 SMA(m), 1.71 to 1.88 GHz, 50Ω
 2000-1475 SMA(m), 1920 to 1980, 2.11 to 2.17 GHz, 50Ω

2000-1411 Portable YAGI Antenna, N(f), 822-900 MHz, 10 dBd
 2000-1412 Portable YAGI Antenna, N(f), 885-975 MHz, 10 dBd
 2000-1413 Portable YAGI Antenna, N(f), 1.71-1.88 GHz, 10 dBd
 2000-1414 Portable YAGI Antenna, N(f), 1.85-1.99 GHz, 9.3 dBd
 2000-1415 Portable YAGI Antenna, N(f), 2.4-2.5 GHz, 12 dBd
 2000-1416 Portable YAGI Antenna, N(f), 1.92-2.23 GHz, 12 dBd

Printer

2000-1214 HP DeskJet 450 printer Includes: interface cable, black print cartridge, and US power cable
 2000-1215 Black print cartridge for DeskJet 450 printer
 2000-1217 Rechargeable battery for DeskJet 450 printer
 2000-1218 Power cable (UK) for DeskJet printer
 2000-663 Power cable (Europe) for DeskJet printer
 2000-664 Power cable (Australia) for DeskJet printer
 2000-667 Power cable (So. Africa) for DeskJet printer
 2000-753 Null Modem Serial-to-Parallel converter cable

Ordering Information (Continued)

Power Monitor - Detectors

The 5400 and 560 Series Detectors use zero-biased Schottky diodes. Measurement range is -55 dBm to +16 dBm using single cycle per sweep AC detection, auto-zeroing with DC detection during the frequency sweep. Extender cables of over 3000 feet can be used with the MS2711D Spectrum Master.

Model	Frequency Range	Impedance	Return Loss	Input Connector	Frequency Response
5400-71N50	0.001 to 3 GHz	50Ω	26 dB	N(m)	±0.2 dB, <1 GHz ±0.3 dB, <3 GHz
5400-71N75	0.001 to 3 GHz	75Ω	26 dB, <2 GHz 20 dB, <3 GHz	N(m)	±0.2 dB, <1 GHz ±0.5 dB, <3 GHz
560-7A50	0.01 to 18 GHz	50Ω	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz	GPC-7	±0.5 dB, <18 GHz
560-7N50B	0.01 to 20 GHz	50Ω	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 14 dB, <20 GHz	N(m)	±0.5 dB, <18 GHz ±1.25 dB, <20 GHz
560-7S50B	0.01 to 20 GHz	50Ω	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 14 dB, <20 GHz	WSMA(m)	±0.5 dB, <18 GHz ±1.25 dB, <20 GHz
560-7S50-2	0.01 to 26.5 GHz	50Ω	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 14 dB, <26.5 GHz	WSMA(m)	±0.5 dB, <18 GHz ±1.25 dB, <26.5 GHz
560-7K50	0.01 to 40 GHz	50Ω	12 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 15 dB, <26.5 GHz 14 dB, <32 GHz 13 dB, <40 GHz	K(m)	±0.5 dB, <18 GHz ±1.25 dB, <26.5 GHz ±2.2 dB, <32 GHz ±2.5 dB, <40 GHz
560-7VA50	0.01 to 50 GHz	50Ω	12 dB, <0.04 GHz 19 dB, <20 GHz 15 dB, <40 GHz 10 dB, <50 GHz	V(m)	±0.8 dB, <20 GHz ±2.5 dB, <40 GHz ±3.0 dB, <50 GHz

ANRITSU CORPORATION

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

- Australia**ANRITSU PTY LTD.**

Unit 3/170 Forster Road Mt. Waverley,
Victoria, 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

- Brazil**ANRITSU ELETRÔNICA LTDA**

Praca Amadeu Amaral, 27-1 andar
01327-010 - Paraiso, Sao Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3886940

- Canada**ANRITSU ELECTRONICS LTD.**

700 Silver Seven Road, Suite 120, Kanata,
ON K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

- Denmark**ANRITSU A/S**

Kirkebjerg All 90 DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

- Finland**ANRITSU AB**

Teknobulevardi 3-5, FI-01530 Vantaa, Finland
Phone: +358-9-4355-220
Fax: +358-9-4355-2250

- France**ANRITSU S.A.**

9, Avenue du Québec Z.A. de Courtaboeuf 91951 Les
Ulis Cedex, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

- Germany**ANRITSU GmbH**

Nemetschek Haus Konrad-Zuse-Platz 1 81829
München, Germany
Phone: +49 (0) 89 442308-0
Fax: +49 (0) 89 442308-55

- Hong Kong**ANRITSU COMPANY LTD.**

Suite 923, 9/F., Chinachem Golden Plaza, 77 Mody
Road, Tsimshatsui East, Kowloon, Hong Kong, China
Phone: +852-2301-4980
Fax: +852-2301-3545

- India**ANRITSU CORPORATION India Liaison Office**

Unit No.S-3, Second Floor, Esteem Red Cross Bhavan,
No.26, Race Course Road, Bangalore 560 001 India
Phone: +91-80-30944707

- Italy**ANRITSU S.p.A.**

Via Elio Vittorini, 129, 00144 Roma EUR, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

- Korea**ANRITSU CORPORATION**

8F Hyun Juk Bldg. 832-41, Yeoksam-dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

- P. R. China**ANRITSU COMPANY LTD.**

Beijing Representative Office
Room 1515, Beijing Fortune Building, No. 5 North Road,
the East 3rd Ring Road, Chao-Yang District
Beijing 100004, P.R. China
Phone: +86-10-6590-9230

- Singapore**ANRITSU PTE LTD.**

10, Hoe Chiang Road #07-01/02, Keppel Towers,
Singapore 089315
Phone: +65-6282-2400
Fax: +65-6282-2533

- Sweden**ANRITSU AB**

Borgafjordsgatan 13 164 40 Kista, Sweden
Phone: +46-853470700
Fax: +46-853470730

- Taiwan**ANRITSU COMPANY INC.**

7F, No. 316, Sec. 1, NeilHu Rd., Taipei, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

- U.K.**ANRITSU LTD.**

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

- U.S.A.**ANRITSU COMPANY**

1155 East Collins Boulevard,
Richardson, Texas 75081
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-644-3416

Please Contact:

