


# Auriga BT Series Multiple-Band High-Power Bias Tees

## A perfect balance of RF performance and power handling

Auriga Bias Tees balance impressive RF performance with heavy-duty power handling across multiple frequency bands ranging from 100 MHz to 26.5 GHz. They are designed for rigorous usage without sacrificing RF performance. Only the highest-quality materials are used to minimize signal loss and enable efficient heat removal.

The highest-power bias tees include a fast-acting fuse to protect DUTs against current spikes. A DC sense port is provided for accurately measuring the incident DC voltage. Bias tees requiring external heat sinking include pre-tapped holes for easy mounting.

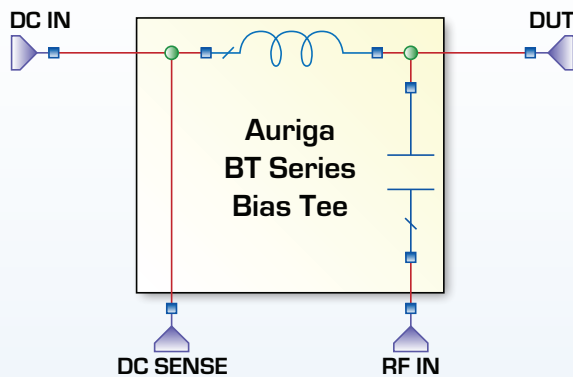

### High power

- Available up to 150 W continuous operation
- Materials chosen to effectively distribute heat loss
- N, 2.92 mm, and 2.4 mm connectors available

### Heavy duty

- Gold-plated, solid metal construction
- Fast-acting replaceable fuse protects against current spikes (available on some models)
- Compact size

### Stellar RF performance

- Wide bandwidth ranging from 100 MHz to 26.5 GHz
- Low insertion loss
- Well-matched input and output

### Excellent DC performance

- DC sense port available for measuring incident DC voltage
- High-voltage (up to 200 V) and high-current (up to 10 A) operation



# Auriga BT Series Multiple-Band High-Power Bias Tees

Part Number	Frequency (GHz)	Max Current (A)	RF Power (W)	Voltage Rating (V)	Typ. Ins. Loss (dB)	Housing Type	Connector Type
BT0110-50	0.1 - 10.0	3	50	100	1.8	B	2.92 mm (m-f)
BT0118-10	0.1 - 18.0	2	10	50	1.5	B	2.92 mm (m-f)
BT0480-50	0.4 - 8.0	2	50	50	1.2	B	2.92 mm (m-f)
BT0730-150*	0.7 - 3.0	3	150	200	0.5	D	Type N (m-f)
BT0780-100	0.7 - 8.0	3	100	50	1.5	D	Type N (m-f)
BT0780-150	0.7 - 8.0	3	150	200	1.5	D	Type N (m-f)
BT0845-50	0.8 - 4.5	4	50	50	1	B	2.92 mm (m-f)
BT1010-50	1.0 - 10.0	1	50	50	2.5	D	Type N (m-f)
BT1018-50	1.0 - 18.0	1	50	50	2	B	2.92 mm (m-f)
BT1026-1	1.0 - 26.5	2	1	150	2.2	B	2.92 mm (m-f)
BT1026-10	1.0 - 26.5	2	10	50	2	B	2.92 mm (m-f)
BT1070-100	1.0 - 7.0	10	100	50	1.8	D	Type N (m-f)
BT1080-50	1.0 - 8.0	4	50	50	2	B	2.92 mm (m-f)
BT1510-50	1.5 - 10.0	2	50	100	2.5	D	Type N (m-f)
BT2018-50	2.0 - 18.0	2	50	50	1.8	B	2.92 mm (m-f)
BT2040-50	2.0 - 4.0	5	50	50	2.1	B	2.92 mm (m-f)
BT2080-100	2.0 - 8.0	10	100	100	1.7	D	Type N (m-f)
BT2080-50	2.0 - 8.0	4	50	50	1.4	B	2.92 mm (m-f)
BT6018-50	6.0 - 18.0	2	50	50	1.5	B	2.92 mm (m-f)
BT8012-50	8.0 - 12.0	5	50	100	2	B	2.92 mm (m-f)
BT8018-10	8.0 - 18.0	3	10	50	1.5	B	2.92 mm (m-f)

Unless otherwise noted, Return Loss Minimum  $\geq 10$  dB

\*BT0730-150 only: Return Loss Minimum  $\geq 18$  dB

Please contact your local Auriga Representative or [sales@aurigamicrowave.com](mailto:sales@aurigamicrowave.com) for pricing and capabilities

Choose from two housing types (refer to selection guide above).



### Type B housing

Outline dimensions:  
1.00" x 1.35" x 0.50"  
(25.4 x 34.3 x 12.7 mm)

Note: 2.4 mm connectors  
are available upon request  
for the Type B housing



### Type D housing

Outline dimensions:  
1.75" x 2.50" x 1.125"  
(44.5 x 63.5 x 28.5 mm)

Note: Type D bias tee  
provides a replaceable fuse



BT\_3 ©2014 Auriga Microwave. Products and specifications subject to change without prior notice.  
This information does not convey any license by any implication or otherwise under any patents or other right.  
Application circuits shown, if any, are typical examples illustrating the operation of the devices.  
Auriga cannot assume responsibility for any problems arising out of these circuits.

Two Executive Drive, Suite 305, Chelmsford, MA 01824 USA  
Phone: 978-452-7700 [www.aurigamicrowave.com](http://www.aurigamicrowave.com)