

DRD SERIES



3 : 3 PIN-OUT RIGHT ANGLE ROTARY TYPE

(2.54 mm Footprint)





◆ Dimensions and circuitry

DRD - 1 x x - x R (Flat Type)

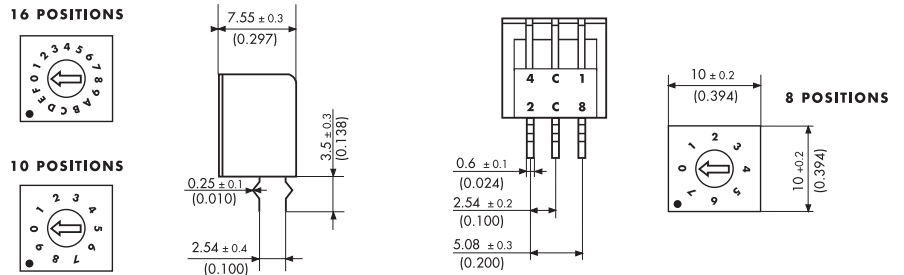


DRD - 2 x x - x R (Shaft Type)

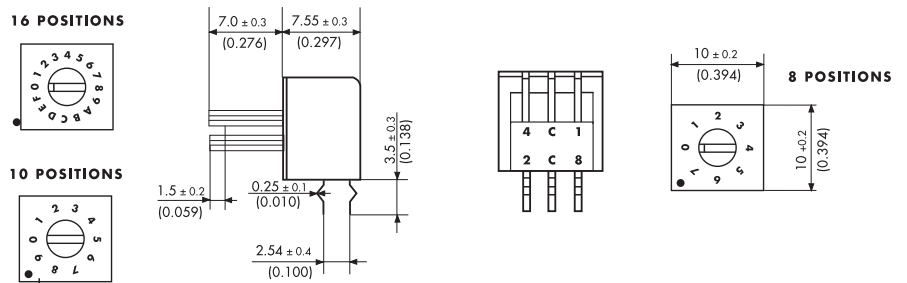


◆ P.C.B. LAYOUT (TOP VIEW)

DRD - x x x - x R

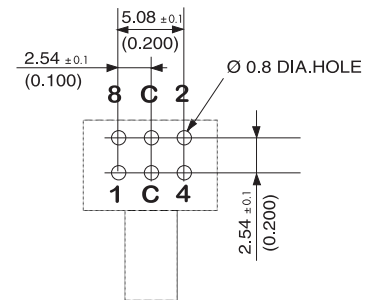

◆ Construction

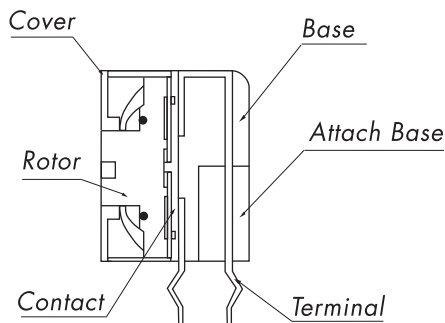

◆ Part Numbering System

DRD - 1 10 - R R Z

RoHS compliant

Type : R = Right Angle
(Row spacing 2.54 mm)

Code : R = Real
C = Complementary

No. of Positions : 08

10


16

Rotor : 1 = Flat type (pin-out 3:3)
2 = Shaft type (pin-out 3:3)

Series

◆ Specifications

See page 1



◆ Features

- Molded-in terminals and fully sealed construction.
- Standard 2.54 mm pin spacing.
- UL 94V-0 fire retardant plastics.
- Reliable contact and long-term stability.
- Binary decimal (10 positions) and hexadecimal (16 positions) real and complementary codes available.
- Pin-out compatible with most of current equivalents.
- Tin plated solder area and gold plated contact area (**tin/gold**).

◆ Specifications

1. ELECTRICAL

- 1-1 Contact Rating
 - switching : 25 mA, 24 VDC
 - non-Switching : 100 mA
- 1-2 Contact Resistance
 - initial : 50 mΩ max.
 - after life test : 100 mΩ max.
- 1-3 Insulation Resistance : 1000 MΩ min. at 100 VDC
- 1-4 Dielectric Strength : 250 VAC for 1 min.

2. MECHANICAL and ENVIRONMENTAL

- 2-1 Temperature rating
 - operating : -25°C to +70°C
 - storage : -40°C to +85°C
- 2-2 Operating force : 500 gf-cm max. (torque)
- 2-3 Mechanical life : 2000 steps per position
- 2-4 Vibration : 10 Hz – 50 Hz – 10 Hz for 6 hours
- 2-5 Solderability : 95% coverage after 230°C +/- 5 for 5 sec.
- 2-6 Soldering temperature
 - through hole wave soldering : 260°C max. for 5 seconds
 - SMT reflow soldering : 210°C for 20 seconds, 230°C peak for 3 sec.

Pin No.	Position															
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1	○	●	○	●	○	●	○	●	○	●	○	●	○	●	○	●
2	○	○	●	●	○	○	●	●	○	○	●	●	○	○	●	●
4	○	○	○	○	●	●	●	●	○	○	○	○	●	●	●	●
8	○	○	○	○	○	○	○	○	●	●	●	●	●	●	●	●

◆ Code

- Real Code
Rotor color: White.
- Complementary Code
Rotor color: Red.