



# Mini DIN Connector


## straight & wall mounting type

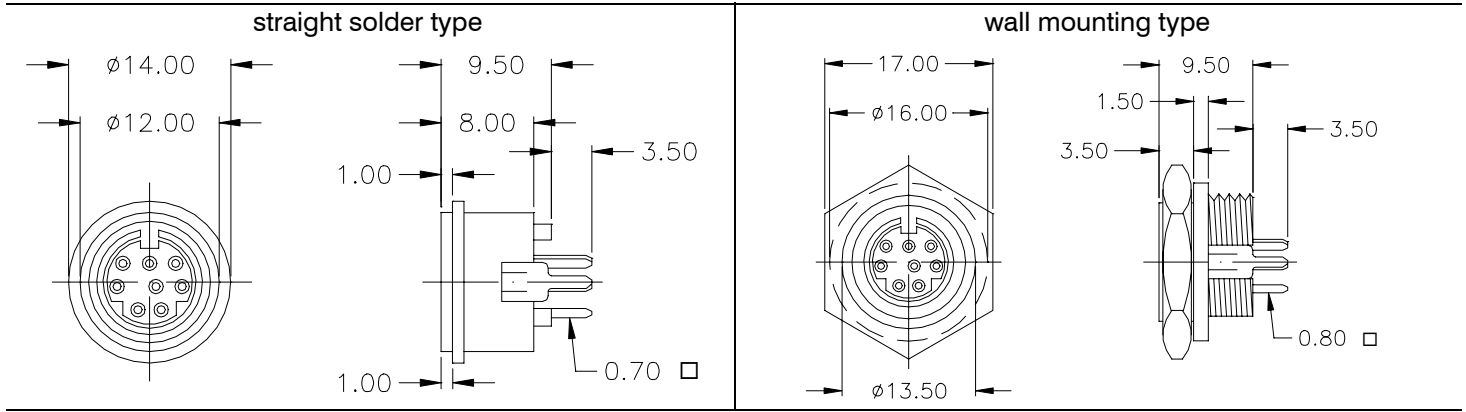

### FRONT VIEWS

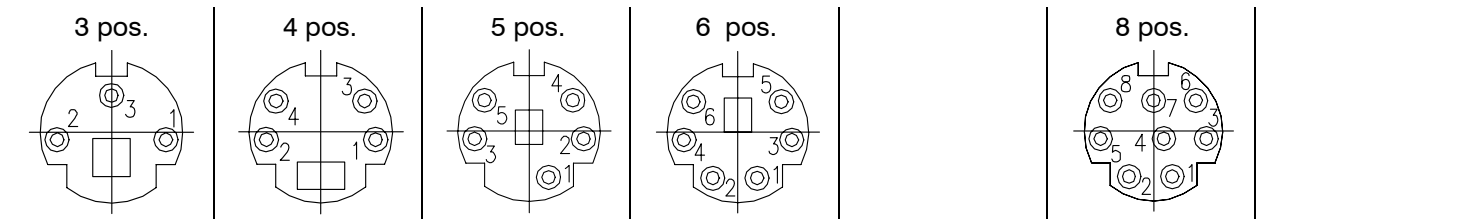

### PCB through hole layout

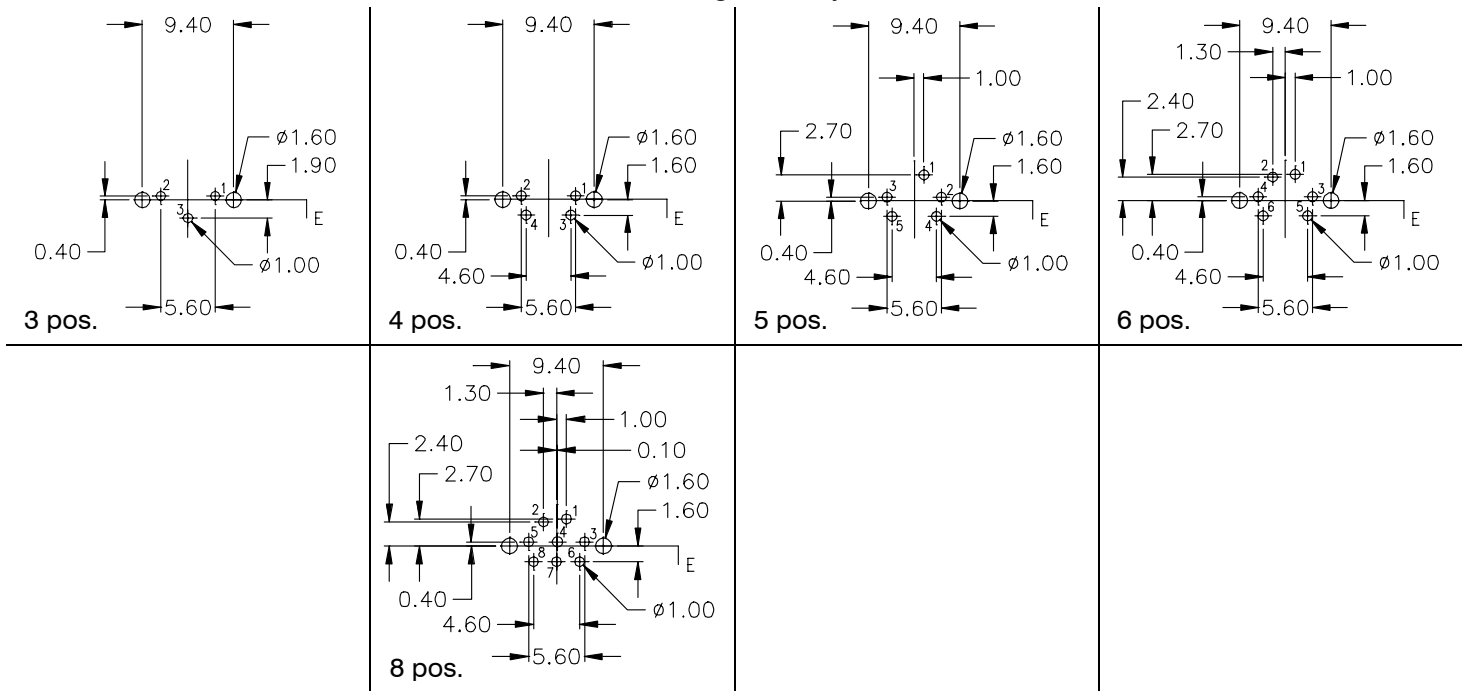

### SPECIFICATIONS

Current rating	1 A max. at 100 V AC or	Contact material	(RoHS compliant) Phosphor bronze
2 A max. at 12 V DC		Contact plating	Silver
Insulator resistance	50 MΩ min. at 250 V DC	Insulator material	(RoHS compliant) P.B.T. UL 94 V-0
Contact resistance	30 mΩ max.	Insertion force	4.5kg max.
Dielectric withstanding voltage	250 V AC for 1 min.	Extraction force	0.8kg min.
Operating temperature	-40°C to +105°C	Insertion/extraction cycles	500 min.

### Ordering Code

**MDJ - xxx - S X 01 - AGZ**

