
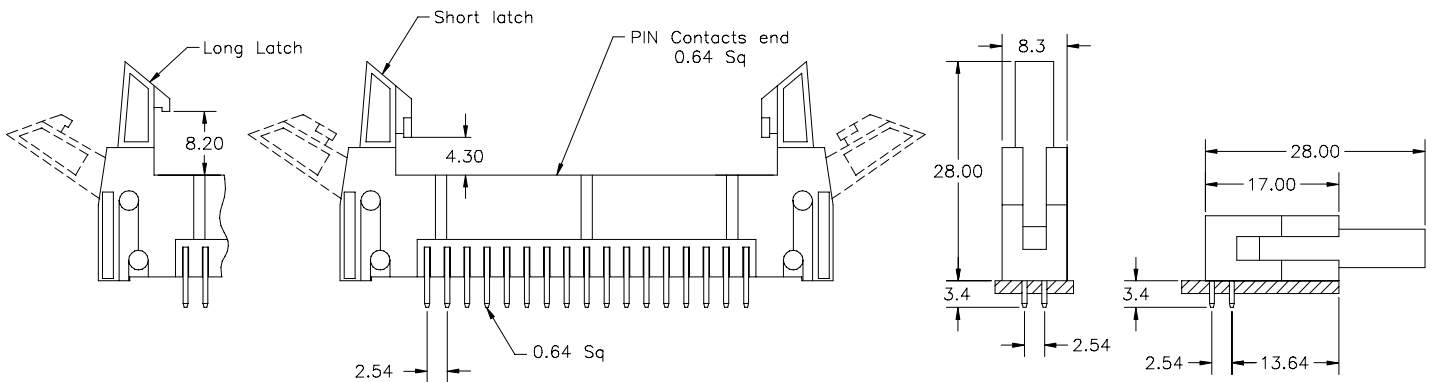
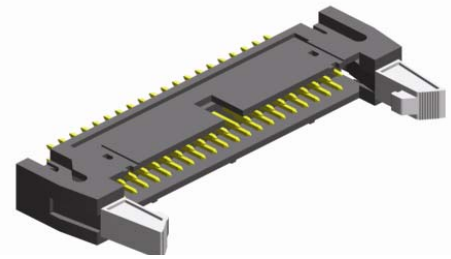


2,54mm pitch

DIN Header (DIN 41651)

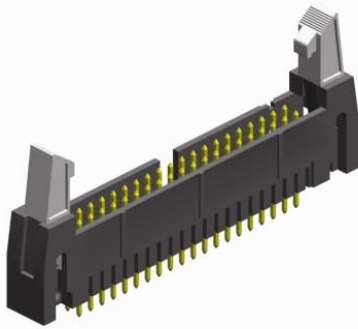

### APPLICATION AND FEATURES

Provides fast connection / disconnection of IDC connectors.

Assures reliable flat cable to PC - board assembly.

Optional latching features available.

### SPECIFICATIONS

Current rating	3 A	Operating temperature	- 40° to +105°C
Insulator resistance	5000 MΩ min.	Contact material (RoHS compliant)	Brass
Contact resistance	20 mΩ max.	Insulator material (RoHS compliant)	P.B.T. UL 94 V-0
Dielectric withstanding	AC 500 V		black colour

### How to order

DH X - xxx - X 100 - 55

