
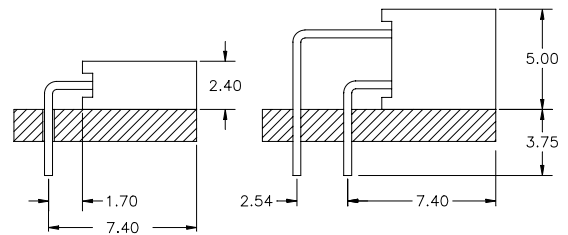

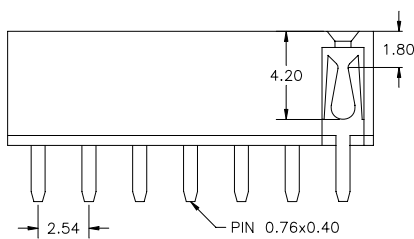

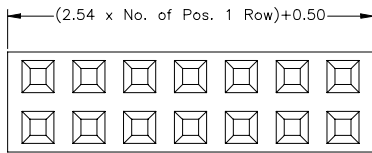
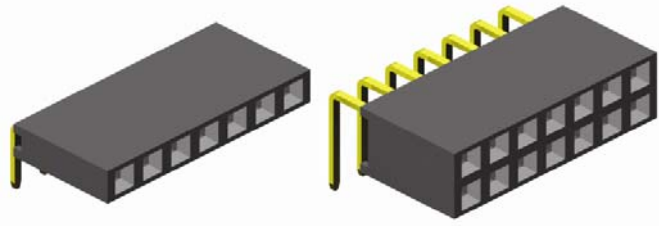


2.54mm pitch Female Header
 - THT - 5.70mm profile

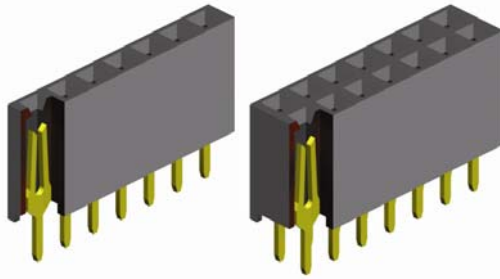


S 570

R 570

SPECIFICATIONS

Current rating	3 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 20sec.
Contact material	Phosphor Bronze (RoHS compliant)
Insulator material	P.B.T. UL 94 V-0 (RoHS compliant)

PCB Hole Layout

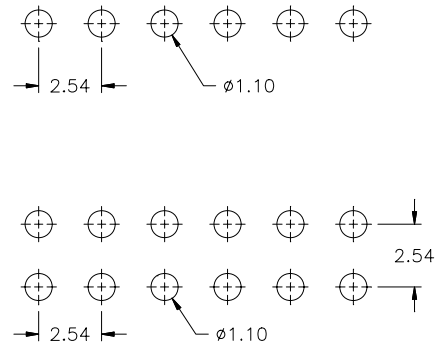

How to order

BL x - xxx - X 570 - 55

Rows	Nbr of contacts	Connector style	Plating
1 = single row	002 to 040	S 570 = straight R 570 = right angle	55 = gold
2 = dual row	004 to 080	S 570 = straight R 570 = right angle	Other platings on request