
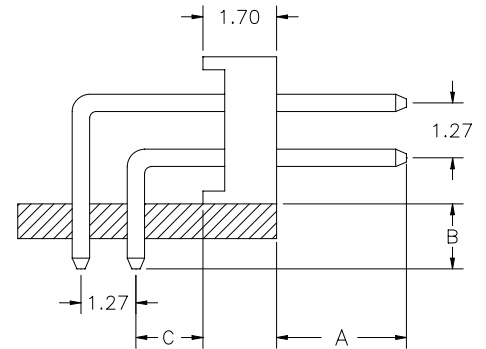
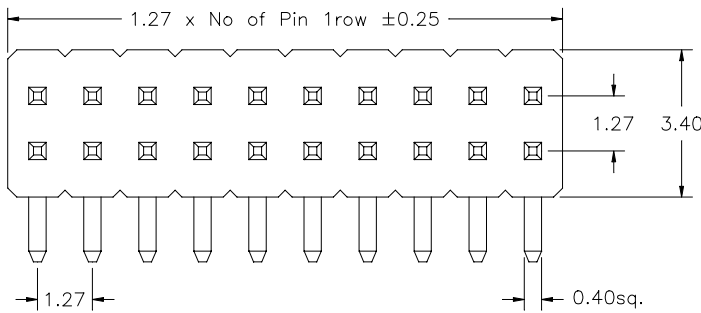



1.27mm pitch Pin Header
 - THT - dual row right angle

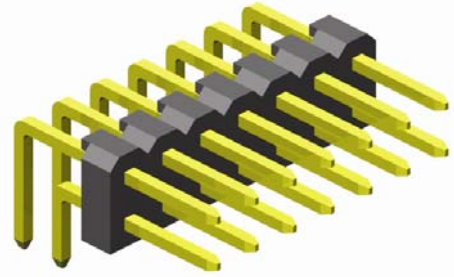

SPECIFICATIONS

Current rating	1 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	500 V AC
Operating temperature	- 40° to +105°C
Processing temperature	+250°C +0/-5°C for 20sec.
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) Nylon UL 94 V-0

PCB Hole Layout

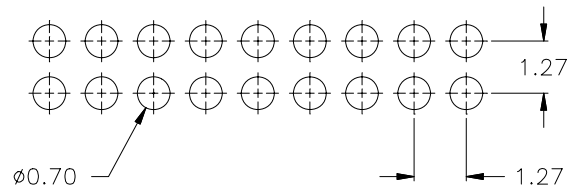

How to order

SL 2 - xxx - R xxx/x - 55 / 11

Nbr of contacts
006 to 100

Pin Code	DIM "A"	DIM "B"	DIM "C"
071/0	3.80mm	3.00mm	1.50mm
071/1	4.80mm	2.50mm	0.80mm
Other dimensions on request			

Plating
55 = gold
other platings on request