



**15-pin HD female / 15-pin HD male**

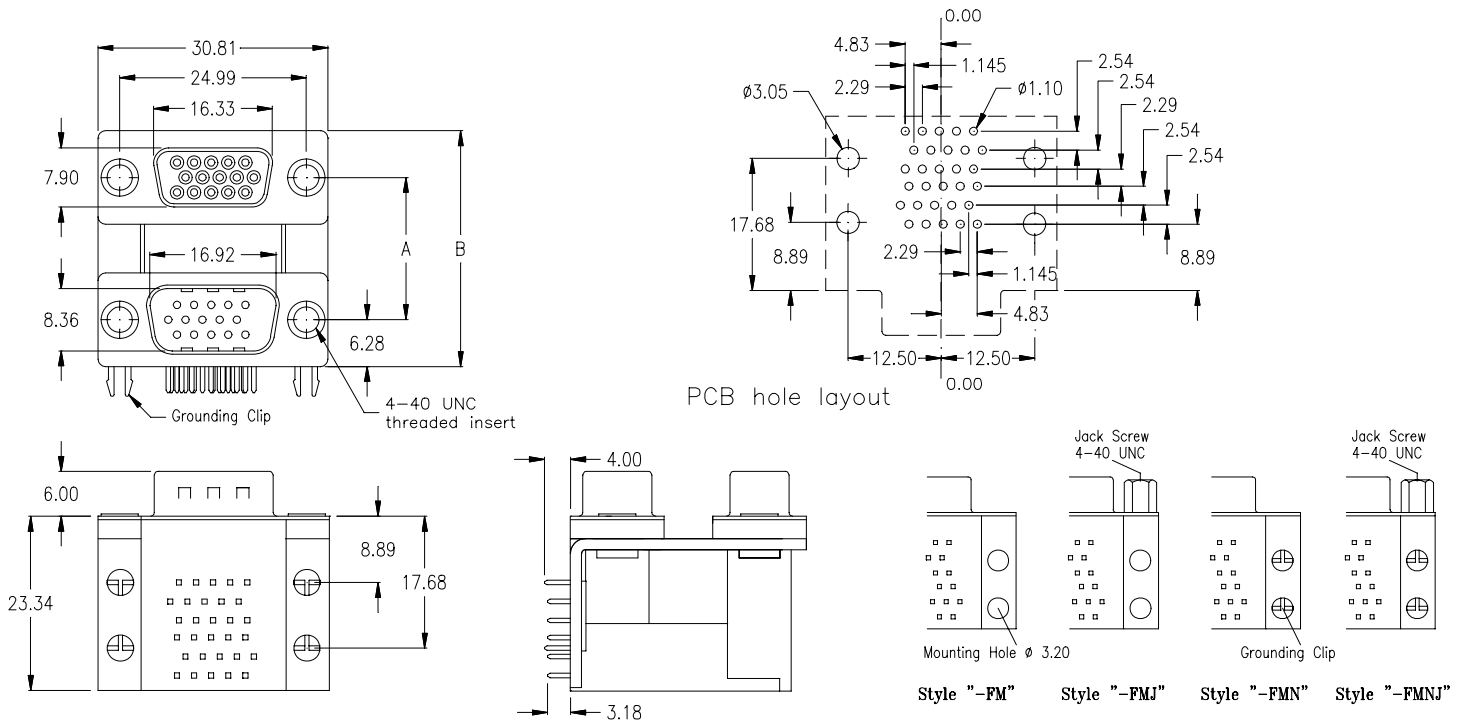

without grounding clips, just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions
SDD-H15H15-2-95-FM	SDD-H15H15-2-95-FMJ	SDD-H15H15-2-95-FMN	SDD-H15H15-2-95-FMNJ	"A" = 19.05 "B" = 31.60

**15-pin HD female / 15-pin HD female**

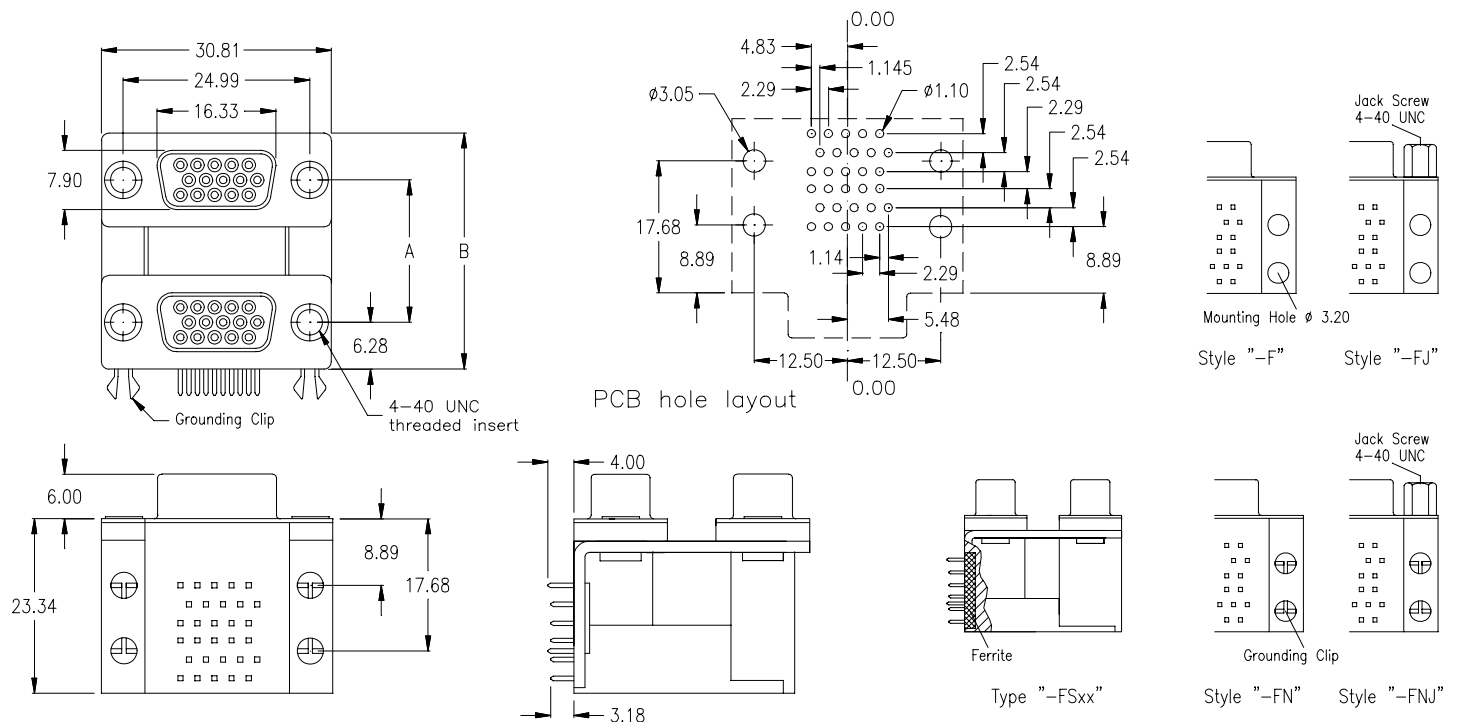

without grounding clips, just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions
SDD-H15H15-2-95-F	SDD-H15H15-2-95-FJ	SDD-H15H15-2-95-FN	SDD-H15H15-2-95-FNJ	"A" = 19.05 "B" = 31.60
if with Ferrite Filter: -FS	if with Ferrite Filter: -FSJ	if with Ferrite Filter: -FSN	if with Ferrite Filter: -FSNJ	