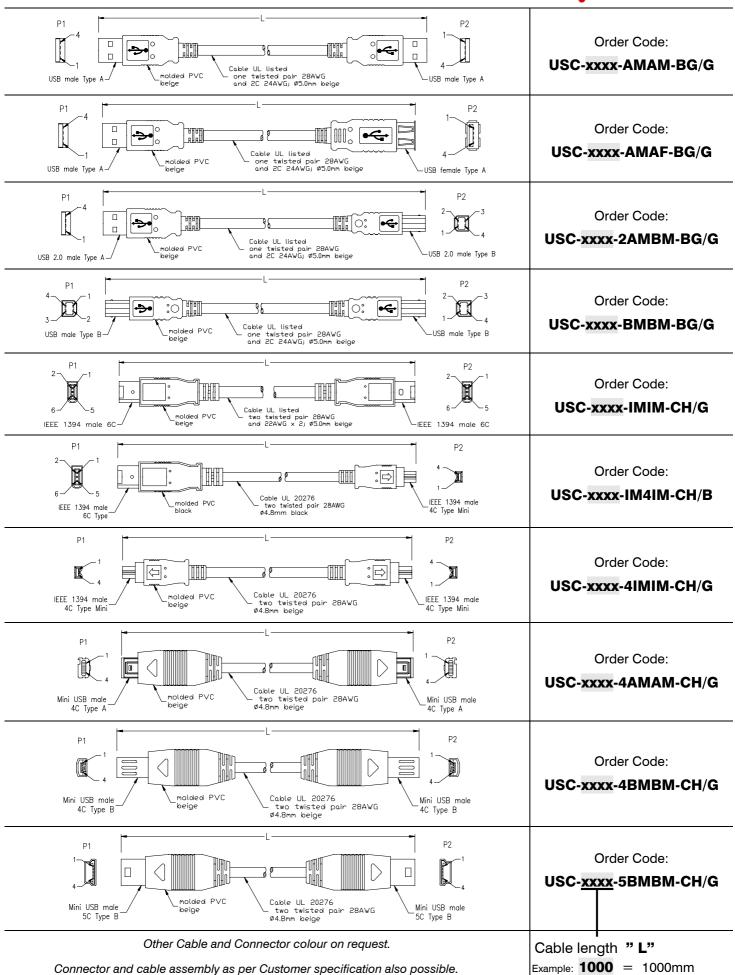# USB & IEEE Cable Assembly

RoHS 2002/95/EC compliant

E-tec Interconnect

Diagram	Order Code
P1 — USB male Type A — molded PVC beige — Cable UL listed one twisted pair 28AWG and 2C 24AWG; Ø5.0mm beige — USB male Type A — P2	Order Code: **USC-xxxx-AMAM-BG/G**
P1 — USB male Type A — molded PVC beige — Cable UL listed one twisted pair 28AWG and 2C 24AWG; Ø5.0mm beige — USB female Type A — P2	Order Code: **USC-xxxx-AMAF-BG/G**
P1 — USB 2.0 male Type A — molded PVC beige — Cable UL listed one twisted pair 28AWG and 2C 24AWG; Ø5.0mm beige — USB 2.0 male Type B — P2	Order Code: **USC-xxxx-2AMBM-BG/G**
P1 — USB male Type B — molded PVC beige — Cable UL listed one twisted pair 28AWG and 2C 24AWG; Ø5.0mm beige — USB male Type B — P2	Order Code: **USC-xxxx-BMBM-BG/G**
P1 — IEEE 1394 male 6C — molded PVC beige — Cable UL listed two twisted pair 28AWG and 22AWG x 2; Ø5.0mm beige — IEEE 1394 male 6C — P2	Order Code: **USC-xxxx-IMIM-CH/G**
P1 — IEEE 1394 male 6C Type — molded PVC black — Cable UL 20276 two twisted pair 28AWG Ø4.8mm black — IEEE 1394 male 4C Type Mini — P2	Order Code: **USC-xxxx-IM4IM-CH/B**
P1 — IEEE 1394 male 4C Type Mini — molded PVC beige — Cable UL 20276 two twisted pair 28AWG Ø4.8mm beige — IEEE 1394 male 4C Type Mini — P2	Order Code: **USC-xxxx-4IMIM-CH/G**
P1 — Mini USB male 4C Type A — molded PVC beige — Cable UL 20276 two twisted pair 28AWG Ø4.8mm beige — Mini USB male 4C Type A — P2	Order Code: **USC-xxxx-4AMAM-CH/G**
P1 — Mini USB male 4C Type B — molded PVC beige — Cable UL 20276 two twisted pair 28AWG Ø4.8mm beige — Mini USB male 4C Type B — P2	Order Code: **USC-xxxx-4BMBM-CH/G**
P1 — Mini USB male 5C Type B — molded PVC beige — Cable UL 20276 two twisted pair 28AWG Ø4.8mm beige — Mini USB male 5C Type B — P2	Order Code: **USC-xxxx-5BMBM-CH/G**

Other Cable and Connector colour on request.

Connector and cable assembly as per Customer specification also possible.

Cable length **" L "**
Example: **1000** = 1000mm