


USS Series Multi Port USB Connector Type „A”




dual port right angle; soldertail

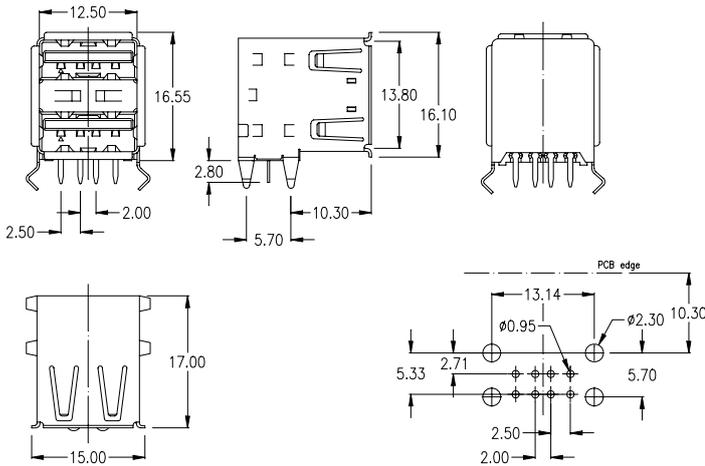

ORDER CODE: **USS - W08 - RA02 - 95**

(- B08 - if black housing)


dual port top entry; soldertail

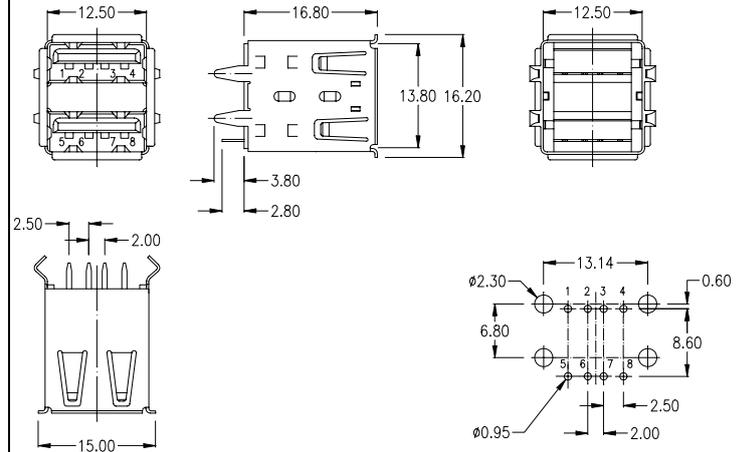

ORDER CODE: **USS - W08 - TA02 - 95**

(- B08 - if black housing)


triple port right angle; soldertail

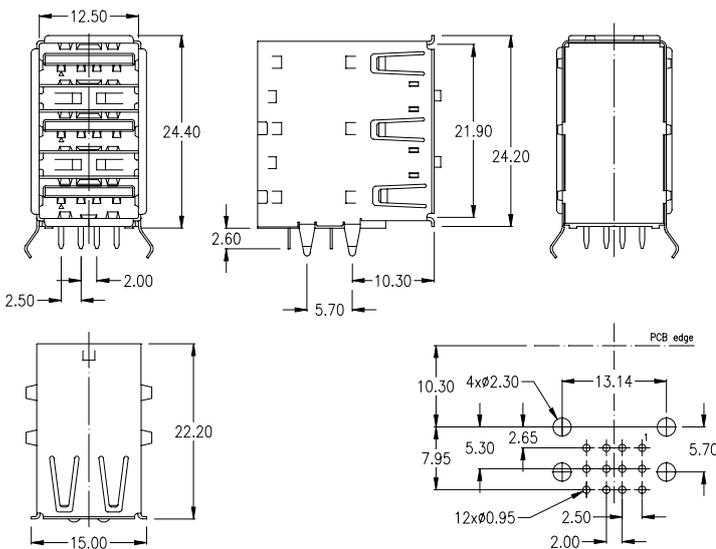

ORDER CODE: **USS - B12 - RA03 - 95**

(- W12 - if white housing)

USB / RJ45 Combi Multi Port

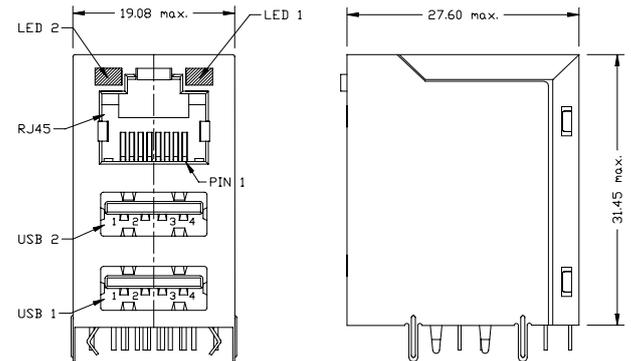

E-tec also offers a USB / RJ45 Combi Multi Port
as TX filtered transformer type with integrated LED.

Datasheets of the different available variations can be obtained
on www.e-tec.com or from your closest E-tec sales office.

Specification

Material

Contact	(RoHS compliant)	Phosphor bronze
Plating:		
Contact area		gold
Solder area		tin (leadfree)
Housing	(RoHS compliant)	PBT white UL 94-V0 (PBT black on request)
SMT housing	(RoHS compliant)	Nylon PA66 UL 94-V0
Shell	(RoHS compliant)	brass, tin (leadfree) or nickel plated

Mechanical

Mating cycles	1.500 min.
---------------	------------

Electrical

Current rating	1,5 A max. 1 Contact (Signal only)
Voltage rating	30V AC (rms)
Withstanding voltage	750V AC (rms) 1 Minute
Insulation resistance	1.000MΩ min. (500V DC)
Contact resistance	30mΩ max.

Others

Operating temperature	-30° C to +75° C
Processing temp. for SMT type	+230° C for 30 sec. max. +260° C for 10 sec. max.