



## Dual Channel Programmable Filter/Amplifier Card

### Introduction

#### Description

Each 90PF slot card provides two channels of precision, low noise and distortion (-100 dB typical) programmable filters with up to 60 dB of pre and 20 dB of post adjustable gain.

Filter modules are programmable from 0.1 Hz to 300 kHz utilizing 4, 11-bit tuning ranges. When assembled with a high-pass filter in channel one (1) and a low-pass filter in channel two (2), 90PF slot cards can be configured on the fly to operate as a low-pass, high-pass, band-pass, or band-reject (notch) filter. Customers can select any combination of two available filter modules per slot card to meet their application specific signal conditioning needs.

Front panel mounted BNC's provide easy access for connection of signal input and output. Other features include differential or single-ended input, AC or DC-coupled input, single ended output, LED clipping indicators and fine adjustment of DC offset. Operating the 90PF in filter BYPASS mode allows the design engineer to use each channel as a precision instrumentation grade programmable amplifier.

#### Features

- 0.1 Hz to 300 kHz Tuning Range
- Selectable single-ended or differential input
- Gain/phase matched channels
- LED clipping indicators
- Memory storage for up to 9 set-ups/slot card
- <-100 dB signal-to-noise ratio to 100 kHz BW
- Programmable gain, 60 dB pre and 20 dB post

#### Applications

- Anti-Aliasing
- Sound Measurement
- Noise Testing
- Audio Communications
- Medical Research
- Industrial Process Control
- Seismic Analysis
- Vibration Analysis



#### Available 90PF Low Pass Filters

<u>Part #</u>	<u>dB</u>	<u># Poles</u>	<u>Filter Type</u>
L8B	-100	8	Butterworth
L8L	-100	8	Bessel
L8E	-88	8, 6-zero	Elliptic, 1.77
L8EX	-80≤100kHz -60>100kHz	8, 6-zero	Elliptic, 1.56
L8EY	-100	8, 6-zero	Elliptic, 2.00
L8D80	-80	8, 6-zero	Constant Delay
L8D10	-100	8, 6-zero	Constant Delay

#### Available 90PF High Pass Filters

<u>Part #</u>	<u>dB</u>	<u># Poles</u>	<u>Filter Type</u>
H8B	-100	8	Butterworth
H8E	-88	8, 6-zero	Elliptic, 1.77
H8EX	-80≤100kHz -60>100kHz	8, 6-zero	Elliptic, 1.56
H8EY	-100	8, 6-zero	Elliptic, 2.00



Dual Channel Programmable Filter/Amplifier Card

Introduction

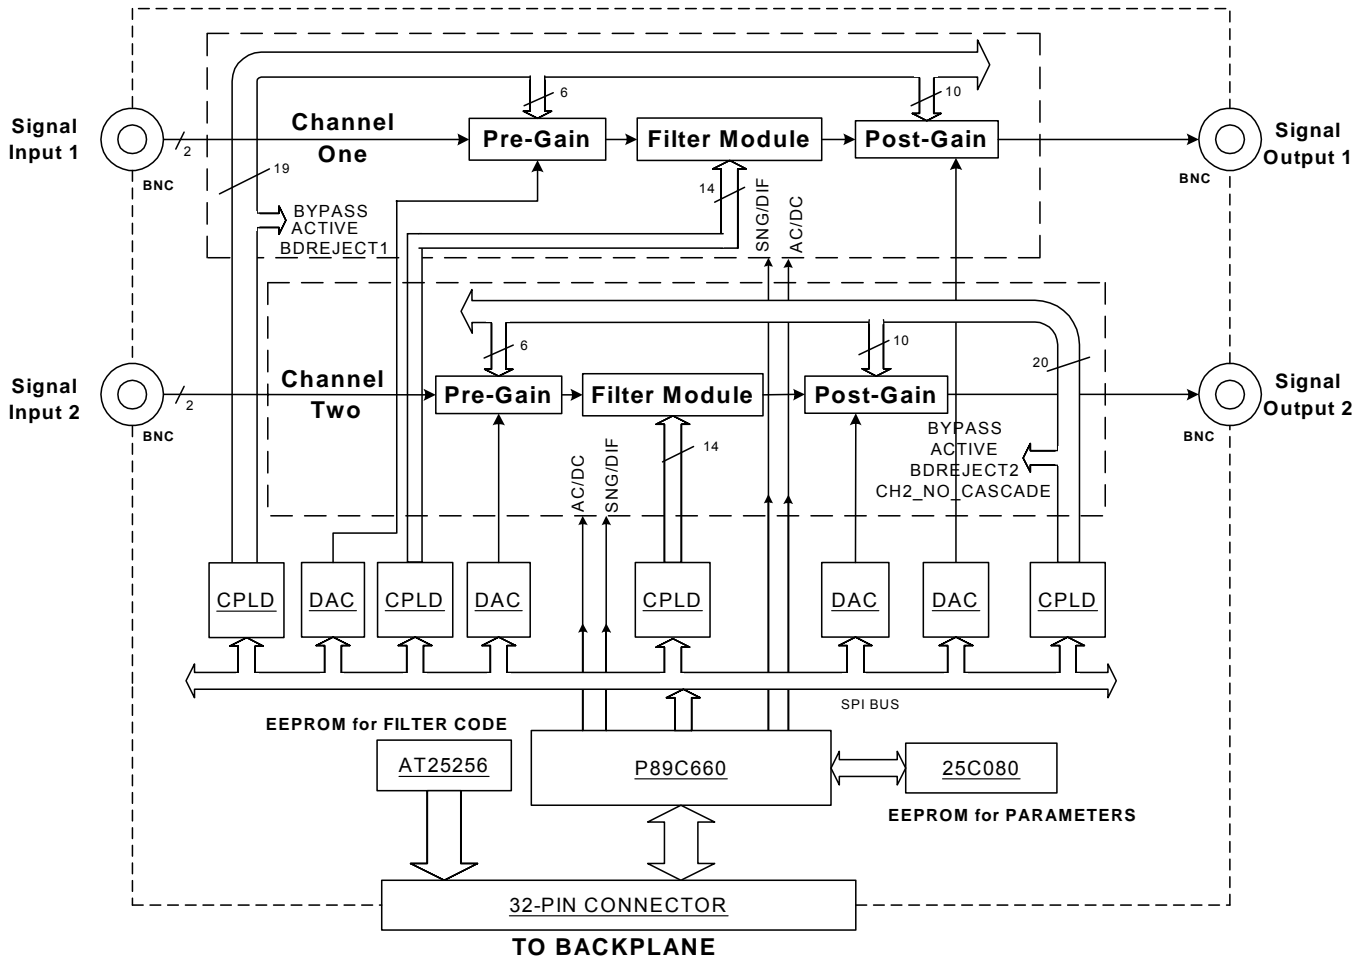


Figure 1 – Signal Path



**Specifications**

**Low Pass  
Filter Options**

<b>Product Model</b>	<b>90PF - L8B</b>	<b>90PF - L8L</b>	<b>90PF - L8E</b>	<b>90PF - L8EX</b>
<b>Transfer Function</b>	8-Pole Butterworth	8-Pole Bessel	8-Pole, 6-Zero elliptic – 1.77	8-Pole, 6-Zero elliptic – 1.56
<b>Tuning Range</b>	0.1 Hz to 300 kHz	0.1 Hz to 300 kHz	0.1 Hz to 300 kHz	0.1 Hz to 300 kHz
<b>Theoretical Transfer Characteristics</b>	Appendix A Page 9	Appendix A Page 4	Appendix A Page 24	Appendix A Page 23
<b>Passband Ripple (theoretical)</b>	0.0 dB	0.0 dB	±0.035 dB	±0.05 dB
<b>Pass Band Gain (non-inverting)</b>	0 ± 0.2 dB	0 ± 0.2 dB	0 ± 0.2 dB	0 ± 0.2 dB to 100 kHz 0 ± 0.4 dB >100 kHz
<b>Stop Band</b>	<b>Attenuation Rate</b> 48 dB/octave	<b>Attenuation Rate</b> 48 dB/octave	<b>Attenuation</b> 80 dB	<b>Attenuation</b> 80 dB <100kHz> 60dB
<b>Corner Frequency Accuracy</b>	$f_c$ ±2% max.	$f_c$ ± 2% max.	$f_r$ ± 2% max.	$f_r$ ± 2% max. ± 3% > 100 kHz
<b>Amplitude Phase</b>	-3 dB -360°	-3 dB -182°	-0.035 dB -323°	-0.05 dB -414°
<b>Phase Match<sup>1</sup></b>	0 - $f_c$ ±2° max. ±1° typ.	0 - $f_c$ ±2° max. ±1° typ.	0 - 0.8 $f_r$ ±2° max. ±1° typ. 0.8 $f_r$ - $f_r$ ±4° max. ±2° typ.	0 - 0.8 $f_r$ ±3° max. ±4° >100kHz 0.8 $f_r$ - $f_r$ ±4° max. ±5° >100kHz
<b>Filter Attenuation (theoretical)</b>	0.12 dB 0.80 $f_c$ 3.01 dB 1.00 $f_c$ 60.0 dB 2.37 $f_c$ 80.0 dB 3.16 $f_c$	1.91 dB 0.80 $f_c$ 3.01 dB 1.00 $f_c$ 60.0 dB 4.52 $f_c$ 80.0 dB 6.07 $f_c$	0.035 dB 1.00 $f_r$ 3.01 dB 1.13 $f_r$ 60.0 dB 1.67 $f_r$ 80.0 dB 1.77 $f_r$	0.5 dB 1.00 $f_r$ 3.01 dB 1.05 $f_r$ 60.0 dB 1.45 $f_r$ 80.0 dB 1.56 $f_r$
<b>Amplitude Accuracy<sup>1</sup></b> 0.1 to 100 kHz (theoretical)	<b>0 - 0.8 <math>f_c</math></b> ±0.2 dB max. ±0.1 dB typ. <b>0.8 <math>f_c</math> - <math>f_c</math></b> ±0.3 dB max. ±0.15 dB typ.	<b>0 - 0.8 <math>f_c</math></b> ±0.2 dB max. ±0.1 dB typ. <b>0.8 <math>f_c</math> - <math>f_c</math></b> ±0.3 dB max. ±0.15 dB typ.	<b>0 - 0.8 <math>f_r</math></b> ±0.2 dB max. ±0.1 dB typ. <b>0.8 <math>f_r</math> - <math>f_r</math></b> ±0.4 dB max. ±0.2 dB typ.	<b>0 - 0.8 <math>f_r</math></b> ±0.2 dB max. ±0.1 dB typ. <b>0.8 <math>f_r</math> - <math>f_r</math></b> ±0.7 dB max. ±0.35 dB typ.
<b>Total Harmonic Distortion @ 1 kHz</b>	<-100dB typ.@3V <sub>rms</sub>	<-100dB typ.@3V <sub>rms</sub>	<-100dB typ.@3V <sub>rms</sub>	<-100dB typ.@3V <sub>rms</sub>
<b>Broad Band Noise (5 Hz to 2MHz)</b>	200µV <sub>rms</sub> typ.	200µV <sub>rms</sub> typ.	200µV <sub>rms</sub> typ.	200µV <sub>rms</sub> typ.
<b>Narrow Band Noise</b>	<100nV/√Hz typ.	<100nV/√Hz typ.	<100nV/√Hz typ.	<100nV/√Hz typ.

Note 1: Channel to channel match for the same transfer function set to the same frequency and operating configuration.



Specifications

Low Pass  
Filter Options

Product Model	90PF - L8EY	90PF - L8D80	90PF - L8D10
<b>Transfer Function</b>	8-Pole, 6-Zero elliptic – 2.00	8-Pole, 6-Zero constant delay	8-Pole, 6-Zero constant delay
<b>Tuning Range</b>	0.1 Hz to 300 kHz	0.1 Hz to 300 kHz	0.1 Hz to 300 kHz
<b>Theoretical Transfer Characteristics</b>	Appendix A Page 25	Appendix A Page 21	Appendix A Page 22
<b>Passband Ripple (theoretical)</b>	0.05 dB	0.10 dB	0.15 dB
<b>Pass Band Gain (non-inverting)</b>	0 ± 0.2 dB	0 ± 0.2 dB	0 ± 0.2 dB
<b>Stop Band</b>	<b>Attenuation Rate</b> 100 dB	<b>Attenuation Rate</b> 80 dB	<b>Attenuation Rate</b> 100 dB
<b>Corner Frequency Accuracy</b>	$f_r \pm 2\%$ max.	$f_c \pm 2\%$ max.	$f_c \pm 2\%$ max.
<b>Amplitude</b>	-0.05 dB	-3 dB	-3 dB
<b>Phase</b>	-419°	-306°	-311°
<b>Phase Match<sup>1</sup></b>	0 – 0.8 $f_r$ ±3° max. ±1.5° typ. 0.8 $f_r$ - $f_r$ ±4° max. ±2° typ.	0 – 0.8 $f_c$ ±2° max. ±1° typ. 0.8 $f_c$ - $f_c$ ±4° max. ±2° typ.	0 – 0.8 $f_c$ ±2° max. ±1° typ. 0.8 $f_c$ - $f_c$ ±4° max. ±2° typ.
<b>Filter Attenuation (theoretical)</b>	0.5 dB 1.00 $f_r$ 3.01 dB 1.06 $f_r$ 80.0 dB 1.83 $f_r$ 100.0 dB 2.00 $f_r$	3.01 dB 1.00 $f_c$ 60.0 dB 3.08 $f_c$ 80.0 dB 3.57 $f_c$	3.01 dB 1.00 $f_c$ 80.0 dB 4.45 $f_c$ 100 dB 5.20 $f_c$
<b>Amplitude Accuracy<sup>1</sup></b> 0.1 to 100 kHz (theoretical)	<b>0 - 0.8 <math>f_r</math></b> ±0.2 dB max. ±0.1 dB typ. <b>0.8 <math>f_r</math> - <math>f_r</math></b> ±0.5 dB max. ±0.25 dB typ.	<b>0 - 0.8 <math>f_c</math></b> ±0.2 dB max. ±0.1 dB typ. <b>0.8 <math>f_c</math> - <math>f_c</math></b> ±0.4 dB max. ±0.2 dB typ.	<b>0 - 0.8 <math>f_c</math></b> ±0.2 dB max. ±0.1 dB typ. <b>0.8 <math>f_c</math> - <math>f_c</math></b> ±0.5 dB max. ±0.25 dB typ.
<b>Total Harmonic Distortion @ 1 kHz</b>	<-100dB typ.@3V <sub>rms</sub>	<-100dB typ.@3V <sub>rms</sub>	<-100dB typ.@3V <sub>rms</sub>
<b>Broad Band Noise (5 Hz to 2MHz)</b>	200µV <sub>rms</sub> typ.	200µV <sub>rms</sub> typ.	200µV <sub>rms</sub> typ.
<b>Narrow Band Noise</b>	<100nV/√Hz typ.	<100nV/√Hz typ.	<100nV/√Hz typ.

Note 1: Channel to channel match for the same transfer function set to the same frequency and operating configuration.



**Specifications**

**High Pass  
Filter Options**

	<b>90PF - H8B</b>	<b>90PF - H8E</b>
<b>Transfer Function</b>	8-Pole Butterworth	8-Pole, 6-Zero elliptic – 1.77
<b>Tuning Range</b>	0.1 Hz to 300 kHz	0.1 Hz to 300 kHz
<b>Theoretical Transfer Characteristics</b>	Appendix A Page 29	Appendix A Page 37
<b>Passband Ripple (theoretical)</b>	0.0 dB	±0.035 dB
<b>Pass Band Gain (non-inverting)</b>	0 ± 0.2dB to 100kHz 0 ± 0.5dB to 400kHz	0 ± 0.2dB to 100kHz 0 ± 0.5dB to 400kHz
<b>Power Bandwidth</b>	500 kHz	500 kHz
<b>Small Signal Bandwidth</b>	(-6 dB) 1 MHz	(-6 dB) 1 MHz
<b>Stop Band</b>	<b>Attenuation Rate</b> 48 dB/octave	<b>Attenuation</b> 80 dB
<b>Corner Frequency Accuracy</b>	$f_c$ ± 2% max.	$f_r$ ± 2% max.
<b>Amplitude</b>	-3 dB	-0.035 dB
<b>Phase</b>	-360°	-323.5°
<b>Phase Match<sup>1</sup></b>	$f_c$ to 100 kHz ±3° max. ±1.5° typ.	$f_r - 1.25 f_r$ ±4° max. ±2° typ. <b>1.25<math>f_r</math> to 100 kHz</b> ±2° max. ±1° typ.
<b>Filter Attenuation (theoretical)</b>	-83 dB 0.30 $f_c$ -48 dB 0.50 $f_c$ -3.01 dB 1.00 $f_c$ -0.01 dB 1.50 $f_c$	-80.0 dB 0.56 $f_r$ -60.0 dB 0.60 $f_r$ -0.03 dB 1.00 $f_r$ 0.00 dB 2.00 $f_r$
<b>Amplitude Accuracy<sup>1</sup> 0.1 Hz to 100 kHz (theoretical)</b>	$f_c - 1.25 f_c$ ±0.3 dB max. ±0.15 dB typ. <b>1.25 <math>f_c - 400</math> kHz</b> ±0.5 dB max.	$f_r - 1.25 f_r$ ±0.4 dB max. ±0.2 dB typ. <b>1.25 <math>f_r - 400</math> kHz</b> ±0.5 dB max.
<b>Total Harmonic Distortion @ 1 kHz</b>	<-100dB typ. @ 3V <sub>rms</sub>	<-100dB typ. @ 3V <sub>rms</sub>
<b>Broad Band Noise (5 Hz – 2 MHz)</b>	400µV <sub>rms</sub> typ.	400µV <sub>rms</sub> typ.
<b>Narrow Band Noise</b>	<100nV/√Hz typ.	<100nV/√Hz typ.

Note 1: Channel to channel match for the same transfer function set to the same frequency and operating configuration.



**Specifications**

**High Pass  
Filter Options**

	<b>90PF - H8EX</b>	<b>90PF - H8EY</b>
<b>Transfer Function</b>	8-Pole, 6-Zero elliptic – 1.56	8-Pole, 6-Zero elliptic – 2.00
<b>Tuning Range</b>	0.1 Hz to 300 kHz	0.1 Hz to 300 kHz
<b>Theoretical Transfer Characteristics</b>	Appendix A Page 36	Appendix A Page 38
<b>Passband Ripple (theoretical)</b>	±0.05 dB	±0.05 dB
<b>Pass Band Gain (non-inverting)</b>	0 ± 0.3dB to 100kHz 0 ± 2.0dB to 400kHz	0 ± 0.2dB to 100kHz 0 ± 2.0dB to 400kHz
<b>Power Bandwidth</b>	500 kHz	500 kHz
<b>Small Signal Bandwidth</b>	(-6 dB) 1 MHz	(-6 dB) 1 MHz
<b>Stop Band</b>	<b>Attenuation</b> 80 dB <100kHz> 60dB	<b>Attenuation</b> 100 dB
<b>Corner Frequency Accuracy</b>	$f_r$ ± 2% max. ± 4% > 100 kHz	$f_r$ ± 2% max.
<b>Amplitude Phase</b>	-0.05 dB -414°	-0.05 dB -419°
<b>Phase Match<sup>1</sup></b>	$f_r - 1.25 f_r$ ±4° max. ±5° > 100 kHz. <b>1.25<math>f_r</math> to 100 kHz</b> ±3° max. ±4° > 100 kHz.	$f_r - 1.25 f_r$ ±4° max. ±2° typ. <b>1.25<math>f_r</math> to 100 kHz</b> ±3° max. ±1.5° typ.
<b>Filter Attenuation (theoretical)</b>	-80.0 dB 0.64 $f_r$ -60.0 dB 0.69 $f_r$ -3.01 dB 0.95 $f_r$ -0.03 dB 1.00 $f_r$ 0.00 dB 2.00 $f_r$	100 dB 0.05 $f_r$ -80.0 dB 0.55 $f_r$ -3.01 dB 0.94 $f_r$ -0.03 dB 1.00 $f_r$ 0.00 dB 2.00 $f_r$
<b>Amplitude Accuracy<sup>1</sup> 0.1 Hz to 100 kHz (theoretical)</b>	$f_r - 1.25 f_r$ ±0.5 dB max. ±0.25 dB typ. <b>1.25 <math>f_r</math> – 400 kHz</b> ±0.7 dB max.	$f_r - 1.25 f_r$ ±0.5 dB max. ±0.25 dB typ. <b>1.25 <math>f_r</math> – 400 kHz</b> ±0.5 dB max.
<b>Total Harmonic Distortion @ 1 kHz</b>	<-100dB typ. @ 3V <sub>rms</sub>	<-100dB typ. @ 3V <sub>rms</sub>
<b>Broad Band Noise (5 Hz – 2 MHz)</b>	400µV <sub>rms</sub> typ.	400µV <sub>rms</sub> typ.
<b>Narrow Band Noise</b>	<100nV/√Hz typ	<100nV/√Hz typ

Note 1: Channel to channel match for the same transfer function set to the same frequency and operating configuration.



Bypass Mode Specifications @ 25°C

Dual Channel Programmable Filter/Amplifier Card

Input Characteristics

Input Impedance:	
Differential	2 MΩ shunted by 47pF
Single Ended	1 MΩ shunted by 47pF
Coupling	AC or DC
Maximum Input Signal	±10V pk @0 dB
Input Voltage:	
Linear Differential	20V p-p (Gain Set at 0 dB)
Max. Safe Differential	Any Continuous value between ±40V
Max Safe Common Mode	Any Continuous value between ±40V
Bias Current	1 nA typ., 2 nA max.
Common Mode Rejection Ratio with 2kΩ source unbalance and 0 dB gain	>60 dB, dc to 50kHz

Output Characteristics

Full Power Bandwidth	dc to 1.0 MHz
Small Signal Bandwidth (1V pk-pk)	1.0 MHz @ -6dB
Related Output	10V p-p for R <sub>L</sub> = 50Ω 20V p-p for R <sub>L</sub> = 2kΩ
Output Protection	short circuit to Ground only
Output Impedance	50Ω
Offset Voltage	Adjustable to zero, In 1 mV steps. (Range ±100mV dc)

General

Cross Talk between Channels	<-100 dB @ 1 kHz
Operating Temperature	0°C to 50°C
Offset Temperature Coeff.	10µV/°C RTI
Humidity	0 to 95%, non-condensing
Slot Card Dimensions	100 x 220 mm (3U)
Weight	0.60 Lbs., (0.3 Kg.)

Amplifier Characteristics

Distortion @ 1 kHz	<-100 dB typ. @ 3.0 Vrms
Noise Density	14 nV/√Hz


Pre Filter Gain (No Filter)

Gain Settings	0 to 60 dB in 5 dB steps ±0.1 dB tolerance
Signal Bandwidth	-6.0 dB @ 1.0 MHz @ +60 dB
Amplitude Match	±0.1 dB @ DC
Gain Accuracy@ DC	±0.1 dB

Post Filter Gain (No Filter)

Gain Settings	0 to 20 dB in 1 dB steps ±0.1 dB tolerance
Signal Bandwidth	-6.0 dB @ 1.0 MHz
Amplitude Match	±0.1 dB @ DC
Gain Accuracy@ DC	±0.1 dB

Ordering Information

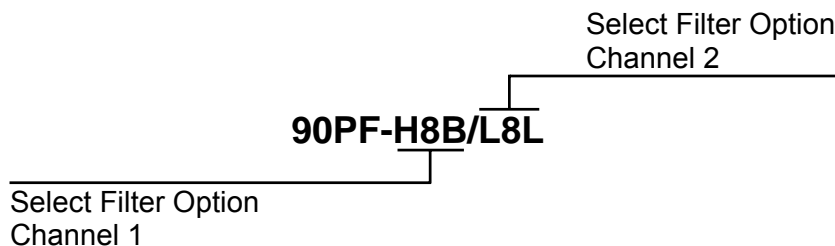




We hope the information given here will be helpful. The information is based on data and our best knowledge, and we consider the information to be true and accurate. Please read all statements, recommendations or suggestions herein in conjunction with our conditions of sale that applies to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions, nor do we intend them as a recommendation for any use which would infringe any patent or copyright.



**Appendix A**

**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.506
0.10	-0.029	-18.2	.506
0.20	-0.117	-36.4	.506
0.30	-0.264	-54.7	.506
0.40	-0.470	-72.9	.506
0.50	-0.737	-91.1	.506
0.60	-1.06	-109	.506
0.70	-1.45	-128	.506
0.80	-1.91	-146	.506
0.85	-2.16	-155	.506
0.90	-2.42	-164	.506
0.95	-2.71	-173	.506
1.00	-3.01	-182	.506
1.10	-3.67	-200	.506
1.20	-4.40	-219	.506
1.30	-5.20	-237	.506
1.40	-6.10	-255	.505
1.50	-7.08	-273	.504
1.60	-8.16	-291	.502
1.70	-9.36	-309	.498
1.80	-10.7	-327	.492
1.90	-12.1	-345	.482
2.00	-13.7	-362	.468
2.25	-18.1	-402	.417
2.50	-23.1	-436	.352
2.75	-28.3	-465	.291
3.00	-33.4	-489	.241
3.25	-38.3	-509	.201
3.50	-43.1	-526	.170
4.00	-51.8	-552	.126
5.00	-66.8	-587	.077
6.00	-79.2	-610	.052
7.00	-89.8	-626	.038
8.00	-99.0	-638	.029
9.00	-107	-647	.023
10.0	-114	-655	.018

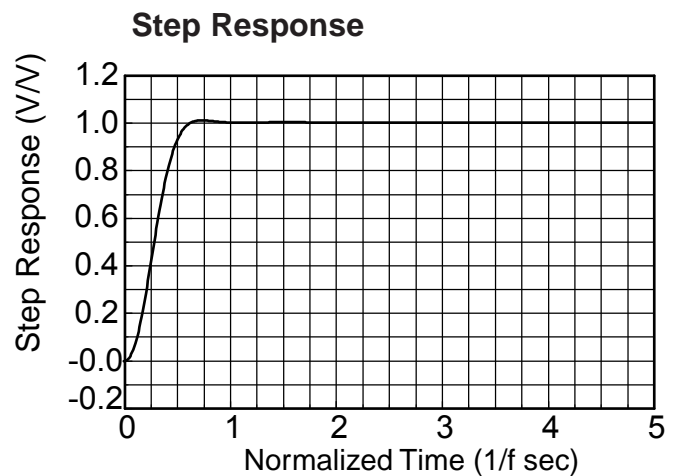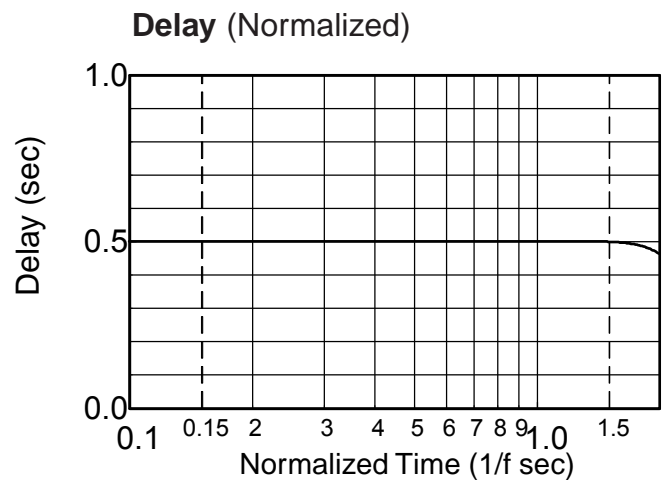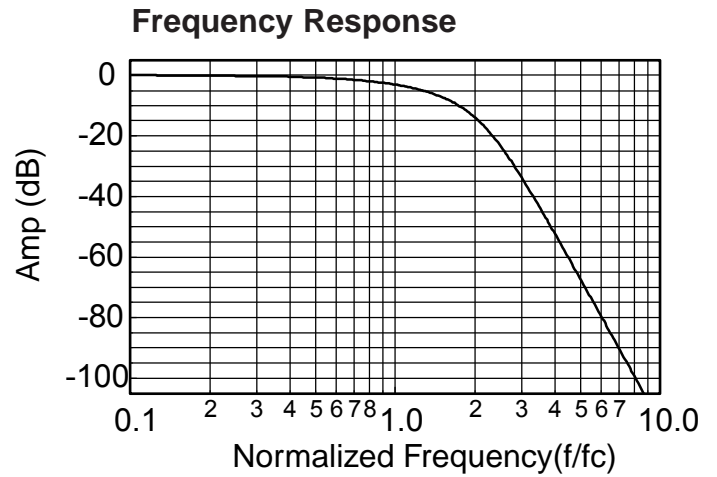

<sup>1</sup> **Normalized Group Delay:**  
The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$








**Appendix A**

**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.816
0.10	0.00	-29.4	.819
0.20	0.00	-59.0	.828
0.30	0.00	-89.1	.843
0.40	0.00	-120	.867
0.50	0.00	-152	.903
0.60	-0.001	-185	.956
0.70	-0.014	-221	1.04
0.80	-0.121	-261	1.19
0.85	-0.311	-283	1.29
0.90	-0.738	-307	1.40
0.95	-1.58	-333	1.48
1.00	-3.01	-360	1.46
1.10	-7.48	-408	1.17
1.20	-12.9	-445	.873
1.30	-18.2	-472	.672
1.40	-23.4	-494	.540
1.50	-28.2	-511	.448
1.60	-32.7	-526	.380
1.70	-36.9	-539	.328
1.80	-40.8	-550	.287
1.90	-44.6	-560	.253
2.00	-48.2	-568	.226
2.25	-56.3	-586	.174
2.50	-63.7	-600	.139
2.75	-70.3	-611	.113
3.00	-76.3	-621	.094
3.25	-81.9	-629	.080
3.50	-87.1	-635	.069
4.00	-96.3	-646	.052
5.00	-112	-661	.033
6.00	-125	-671	.023
7.00	-135	-678	.017
8.00	-144	-683	.013
9.00	-153	-687	.010
10.0	-160	-691	.008

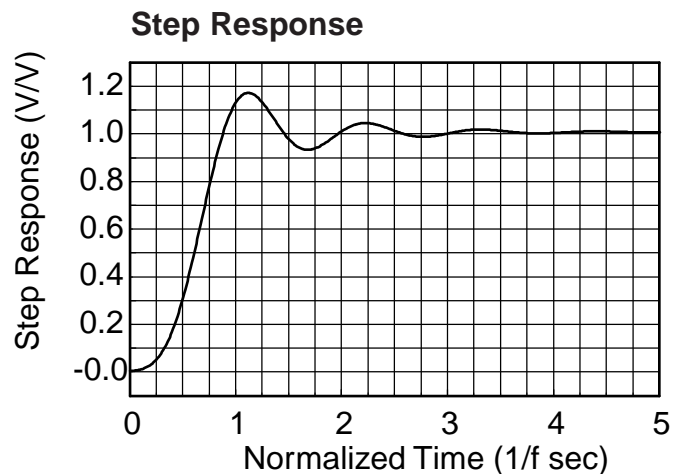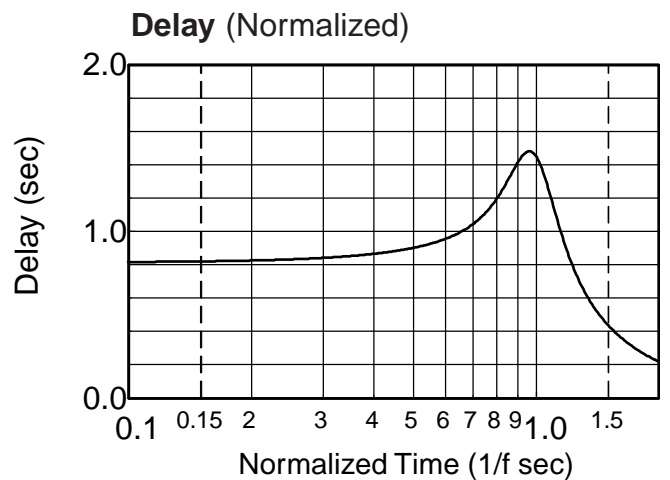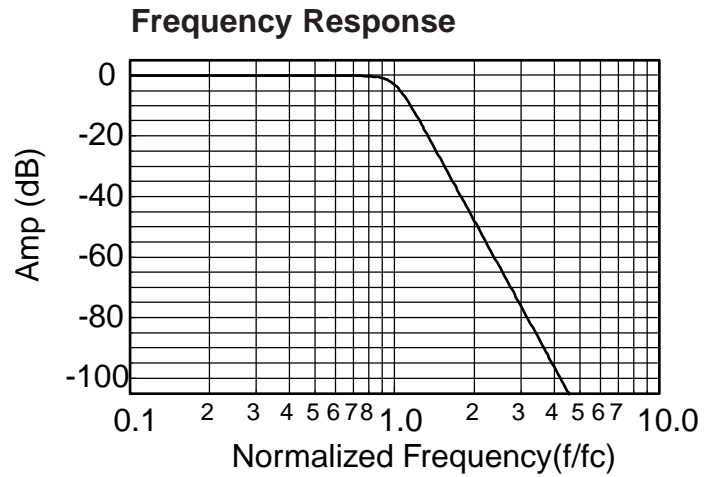

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$



**Appendix A**

**Theoretical Transfer Characteristics**


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.852
0.10	0.017	-30.7	.852
0.20	0.058	-61.3	.852
0.30	0.099	-92.0	.852
0.40	0.105	-123	.852
0.50	0.034	-153	.852
0.60	-0.157	-184	.852
0.70	-0.510	-215	.852
0.80	-1.07	-245	.851
0.85	-1.44	-261	.850
0.90	-1.89	-276	.849
0.95	-2.41	-291	.846
1.00	-3.01	-306	.841
1.10	-4.50	-336	.821
1.20	-6.39	-365	.783
1.40	-11.3	-417	.656
1.60	-17.1	-459	.512
1.80	-23.2	-492	.396
2.00	-29.1	-517	.312
2.25	-36.3	-542	.239
2.50	-43.4	-561	.189
2.75	-50.3	-576	.153
3.00	-57.6	-589	.127
3.25	-62.5	-599	.107
3.50	-75.4	-608	.092
3.75	-98.3	-616	.079
4.00	-86.3	-442	.069
4.25	-84.1	-448	.061
4.50	-85.1	-454	.054
4.75	-87.9	-458	.049
5.00	-92.8	-462	.044
5.25	-104	-466	.040
5.50	-101	-289	.036
5.75	-93.3	-293	.033
6.00	-89.9	-295	.030
6.50	-86.6	-300	.026
7.00	-85.1	-305	.022
8.00	-84.1	-312	.017
9.00	-84.3	-317	.013
10.0	-84.9	-321	.011

**1. Normalized Group Delay:**


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


**Frequency Response**

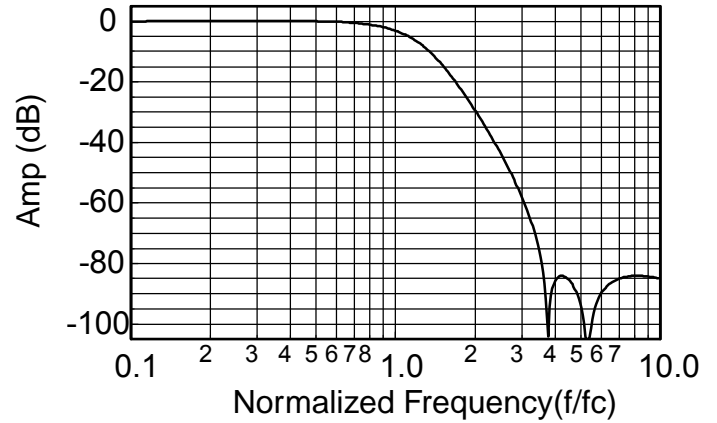

**Delay (Normalized)**

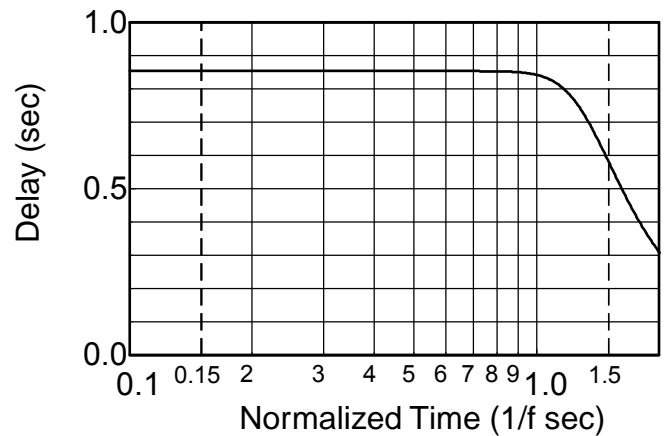

**Step Response**

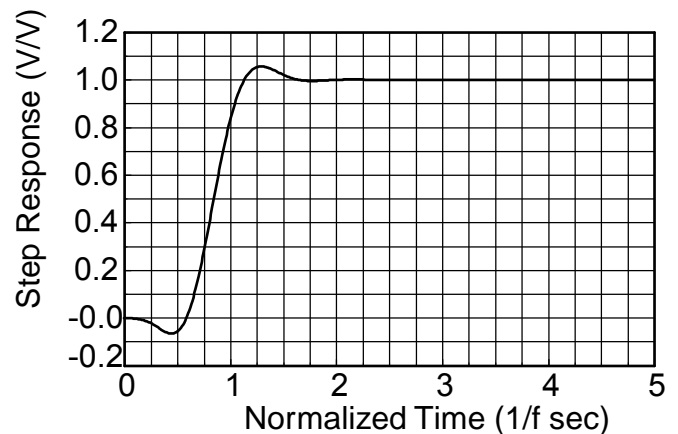



**Appendix A**




**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.865
0.10	0.015	-31.1	.865
0.20	0.051	-62.3	.865
0.30	0.085	-93.4	.865
0.40	0.085	-125	.865
0.50	0.010	-156	.865
0.60	-0.182	-187	.865
0.70	-0.532	-218	.865
0.80	-1.09	-249	.864
0.85	-1.45	-265	.863
0.90	-1.89	-280	.861
0.95	-2.41	-296	.857
1.00	-3.01	-311	.851
1.10	-4.50	-341	.828
1.20	-6.38	-370	.785
1.40	-11.2	-422	.650
1.60	-16.8	-464	.504
1.80	-22.5	-496	.389
2.00	-28.0	-520	.306
2.25	-34.5	-544	.235
2.50	-40.5	-563	.186
2.75	-46.1	-578	.151
3.00	-51.4	-591	.125
3.50	-61.5	-610	.090
4.00	-71.2	-624	.068
4.50	-81.3	-635	.054
5.00	-93.4	-643	.043
5.50	-142	-651	.036
6.00	-105	-476	.030
6.20	-105	-478	.028
6.50	-106	-481	.025
7.00	-110	-486	.022
8.00	-122	-312	.017
9.00	-109	-318	.013
10.0	-106	-322	.011
12.0	-105	-328	.007
14.0	-106	-333	.005
16.0	-107	-336	.004
18.0	-108	-339	.003
20.0	-109	-341	.003

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$

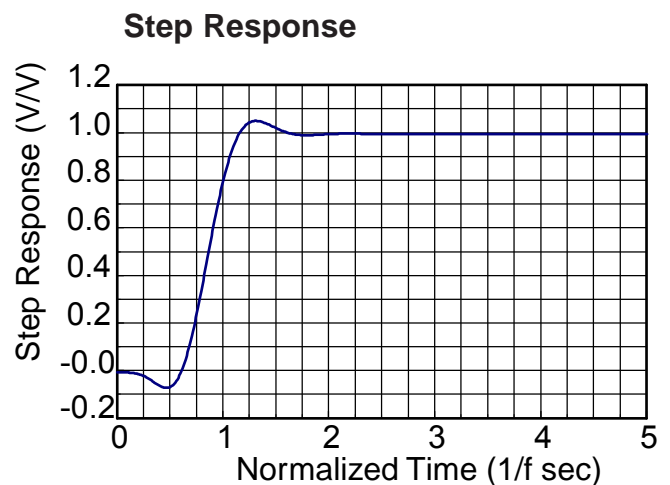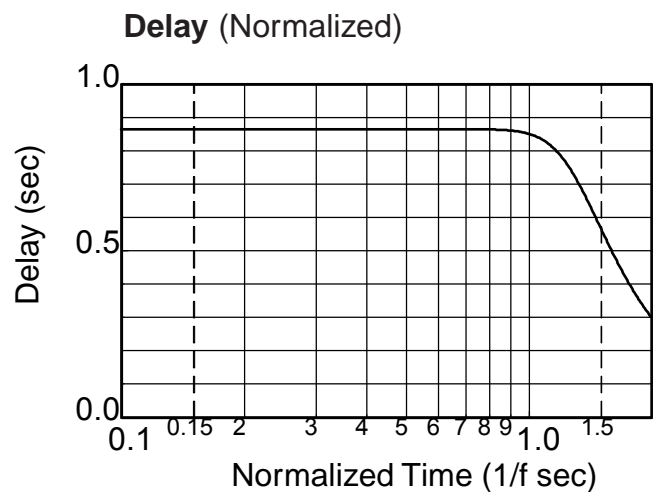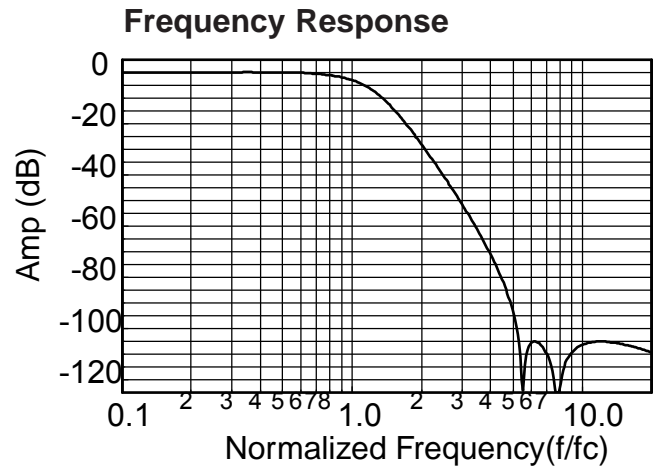



**Appendix A**

**Theoretical Transfer Characteristics**


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	0.823
0.10	-0.001	-29.7	0.829
0.20	-0.013	-59.8	0.844
0.30	-0.040	-90.5	0.865
0.40	-0.049	-122	0.904
0.50	-0.018	-156	0.972
0.55	-0.003	-174	1.016
0.60	-0.002	-192	1.064
0.65	-0.019	-212	1.116
0.70	-0.042	-233	1.178
0.75	-0.049	-255	1.264
0.80	-0.026	-279	1.388
0.85	-0.001	-305	1.557
0.90	-0.024	-335	1.767
0.95	-0.045	-369	2.111
1.00	-0.050	-414	3.062
1.10	-10.48	-531	2.043
1.20	-25.96	-576	0.814
1.30	-39.45	-598	0.493
1.40	-52.87	-614	0.348
1.50	-69.11	-624	0.265
1.60	-89.09	-453	0.211
1.70	-85.32	-459	0.174
1.75	-89.95	-463	0.156
1.80	-103.5	-465	0.147
1.85	-95.94	-288	0.158
1.90	-89.31	-290	0.126
1.95	-86.44	-292	0.117
2.00	-84.96	-295	0.110
2.20	-84.54	-302	0.087
2.40	-88.65	-307	0.069
2.60	-99.78	-311	0.057
2.80	-99.97	-135	0.048
3.00	-90.20	-139	0.041
3.50	-85.09	-145	0.029
4.00	-84.04	-150	0.022
5.00	-84.76	-156	0.014
6.00	-86.45	-160	0.009
7.00	-88.31	-163	0.007
8.00	-90.11	-165	0.005
9.00	-91.82	-167	0.004
10.0	-93.41	-168	0.003

**1. Normalized Group Delay:**


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


**Frequency Response**

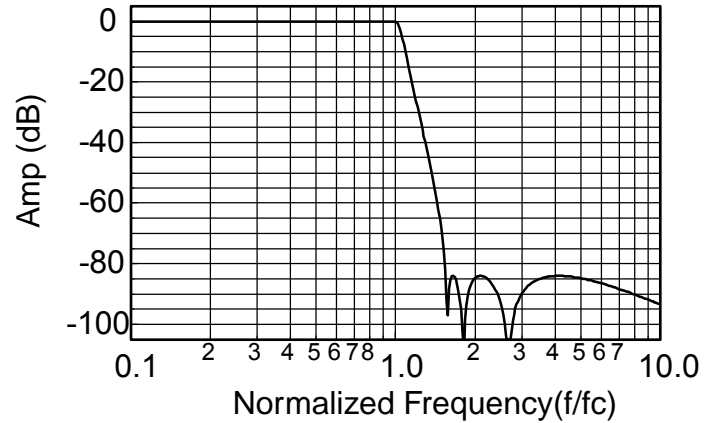

**Delay (Normalized)**

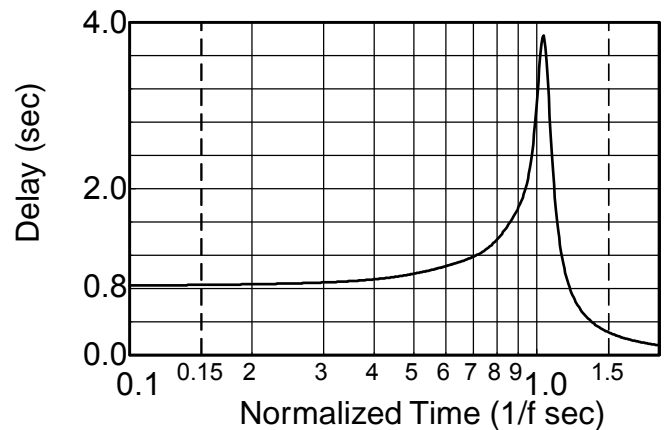

**Step Response**

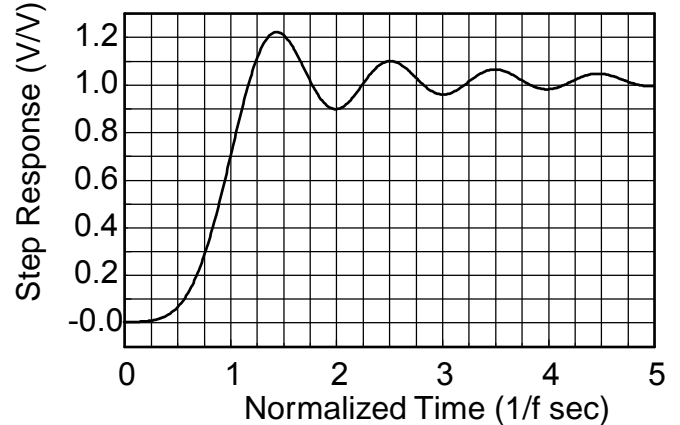



**Appendix A**

**Theoretical Transfer Characteristics**


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	0.713
0.10	-0.004	-25.7	0.716
0.20	-0.014	-51.6	0.724
0.30	-0.024	-77.9	0.740
0.40	-0.020	-105	0.767
0.50	0.007	-133	0.811
0.55	0.022	-148	0.840
0.60	0.033	-163	0.872
0.65	0.031	-179	0.908
0.70	0.014	-196	0.946
0.75	-0.015	-213	0.989
0.80	-0.041	-232	1.04
0.85	-0.046	-251	1.12
0.90	-0.016	-272	1.23
0.95	-0.025	-296	1.40
1.00	-0.035	-323	1.65
1.10	-1.76	-392	2.14
1.20	-8.28	-467	1.86
1.30	-18.4	-522	1.19
1.40	-29.3	-558	0.753
1.50	-40.1	-578	0.517
1.60	-51.5	-594	0.381
1.70	-65.2	-606	0.296
1.75	-75.0	-611	0.265
1.80	-113.0	-616	0.239
1.85	-83.6	-440	0.217
1.90	-82.0	-444	0.198
1.95	-83.7	-447	0.182
2.00	-87.8	-450	0.168
2.20	-85.8	-280	0.126
2.40	-82.0	-289	0.099
2.60	-83.5	-295	0.081
2.80	-88.2	-301	0.067
3.00	-99.9	-305	0.057
3.50	-87.2	-134	0.040
4.00	-83.1	-140	0.030
5.00	-82.1	-148	0.018
6.00	-83.1	-154	0.013
7.00	-84.6	-157	0.009
8.00	-86.2	-160	0.007
9.00	-87.8	-163	0.005
10.0	-89.3	-164	0.004

**1. Normalized Group Delay:**


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


**Frequency Response**

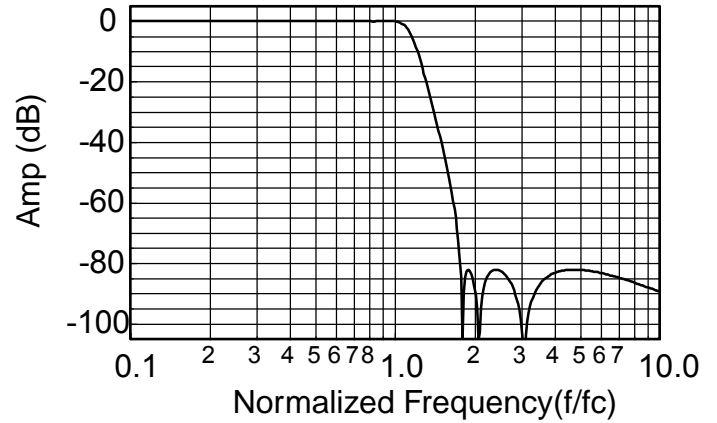

**Delay (Normalized)**

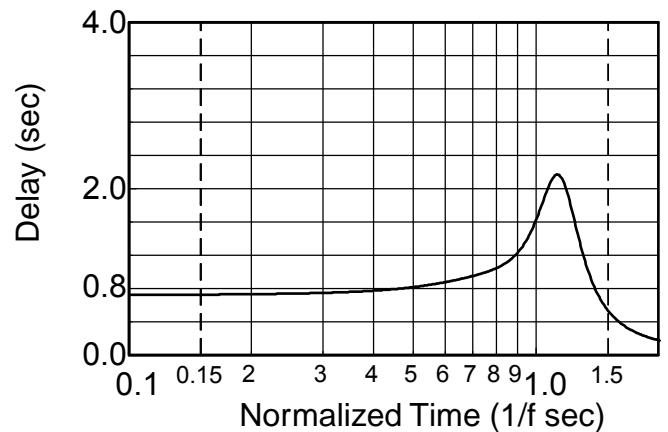

**Step Response**

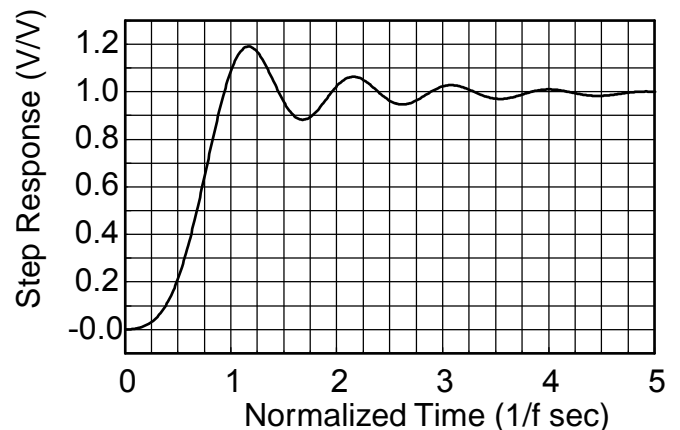



**Appendix A**

**Theoretical Transfer Characteristics**


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	0.885
0.10	-0.001	-31.9	0.891
0.20	-0.015	-64.2	0.903
0.30	-0.040	-97.0	0.922
0.40	-0.042	-131	0.958
0.50	-0.001	-166	1.020
0.55	0.000	-185	1.057
0.60	-0.007	-204	1.099
0.65	-0.027	-225	1.140
0.70	-0.045	-245	1.193
0.75	-0.040	-268	1.269
0.80	-0.014	-291	1.377
0.85	-0.001	-317	1.513
0.90	-0.031	-346	1.677
0.95	-0.036	-378	1.960
1.00	-0.046	-419	2.681
1.10	-7.910	-525	2.127
1.20	-21.06	-573	0.856
1.30	-31.96	-597	0.509
1.40	-41.51	-612	0.357
1.50	-50.35	-623	0.271
1.60	-58.90	-632	0.216
1.70	-67.54	-639	0.177
1.75	-72.04	-642	0.162
1.80	-76.79	-645	0.149
1.85	-81.93	-647	0.138
1.90	-87.78	-650	0.128
1.95	-95.04	-652	0.119
2.00	-106.6	-654	0.111
2.20	-106.0	-481	0.087
2.40	-121.3	-307	0.070
2.60	-106.5	-311	0.058
2.80	-105.0	-315	0.049
3.00	-106.4	-318	0.042
3.50	-123.6	-325	0.030
4.00	-111.5	-149	0.022
5.00	-105.4	-156	0.014
6.00	-105.1	-160	0.010
7.00	-106.0	-163	0.007
8.00	-107.3	-165	0.005
9.00	-108.6	-167	0.004
10.0	-110.0	-168	0.003

**1. Normalized Group Delay:**


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


**Frequency Response**

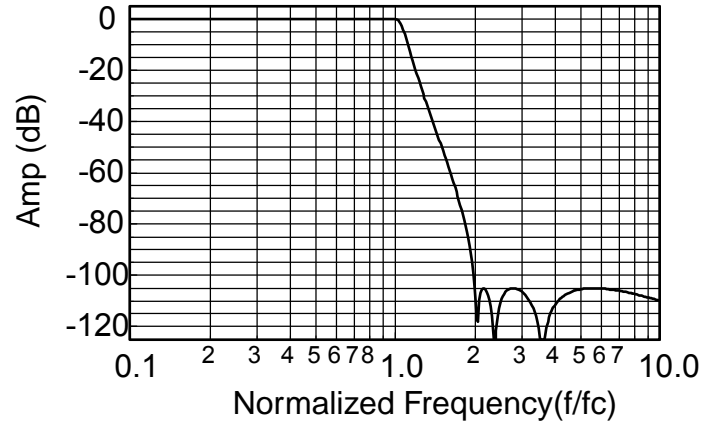

**Delay (Normalized)**

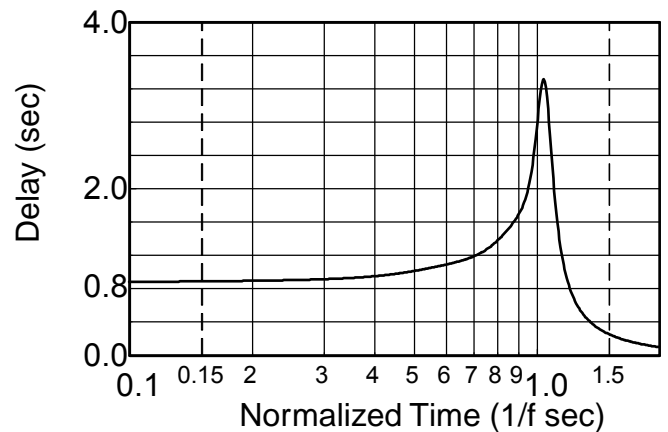

**Step Response**

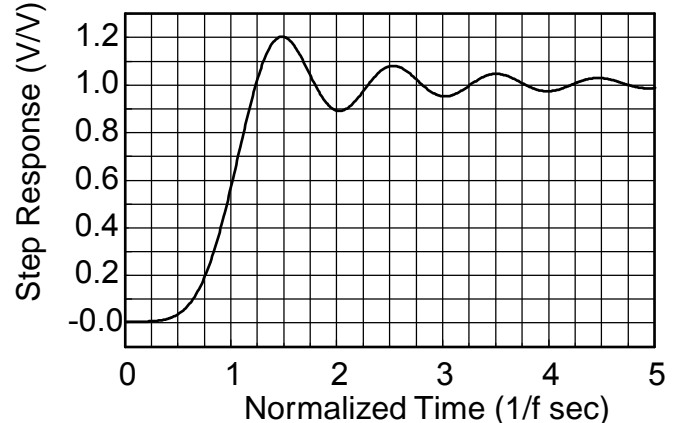




**Theoretical Transfer Characteristics**

<b>f/fc (Hz)</b>	<b>Amp (dB)</b>	<b>Phase (deg)</b>	<b>Delay<sup>1</sup> (sec)</b>
0.10	-160	691	0.819
0.20	-112	661	0.828
0.30	-83.7	631	0.843
0.40	-63.7	600	0.867
0.50	-48.2	568	0.903
0.60	-35.5	535	.956
0.70	-24.8	499	1.04
0.80	-15.6	459	1.19
0.85	-11.6	437	1.29
0.90	-8.06	413	1.40
0.95	-5.15	386	1.48
1.00	-3.01	360	1.46
1.20	-0.229	275	0.873
1.40	-0.020	226	0.540
1.60	-0.002	194	0.380
1.80	0.00	170	0.287
2.00	0.00	152	0.226
2.50	0.00	120	0.139
3.00	0.00	99.2	0.094
4.00	0.00	74.0	0.052
5.00	0.00	59.0	0.033
6.00	0.00	49.0	0.023
7.00	0.00	42.1	0.017
8.00	0.00	36.8	0.013
9.00	0.00	32.7	0.010
10.0	0.00	29.4	0.008

**Frequency Response**

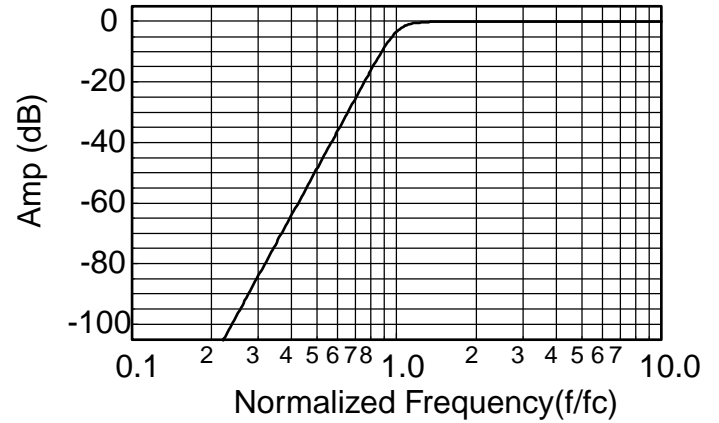

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$




**Appendix A**

**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.10	-93.4	168	0.334
0.20	-84.8	156	0.344
0.30	-86.0	143	0.363
0.40	-92.6	310	0.392
0.50	-85.0	295	0.439
0.55	-114	287	0.472
0.60	-84.1	458	0.515
0.70	-57.0	617	0.652
0.80	-32.8	589	0.962
0.85	-22.6	569	1.325
0.90	-12.3	538	2.198
0.95	-3.08	483	3.993
1.00	-0.05	414	3.062
1.10	-0.03	341	1.498
1.20	-0.01	296	1.039
1.30	-0.04	264	0.773
1.40	-0.05	239	0.612
1.50	-0.03	219	0.505
1.60	-0.01	202	0.426
1.70	0.00	188	0.364
1.80	0.00	176	0.315
1.90	-0.01	165	0.275
2.00	-0.02	156	0.243
2.50	-0.05	122	0.145
3.00	-0.05	101	0.097
4.00	-0.03	75.1	0.053
5.00	-0.01	59.8	0.034
6.00	-0.01	49.7	0.023
7.00	0.00	42.5	0.017
8.00	0.00	37.2	0.013
9.00	0.00	33.0	0.010
10.0	0.00	29.7	0.008

**Frequency Response**

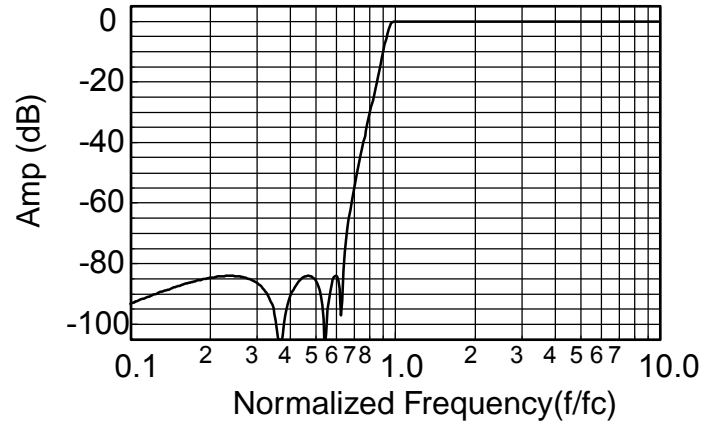

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$






**Appendix A**

**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.10	-89.3	164	0.440
0.20	-82.1	148	0.459
0.30	-90.6	131	0.495
0.40	-82.4	292	0.559
0.50	-87.8	450	0.671
0.55	-90.0	437	0.761
0.60	-60.2	603	0.890
0.70	-32.4	563	1.37
0.80	-13.1	498	2.35
0.85	-6.28	451	2.77
0.90	-2.21	401	2.66
0.95	-0.51	358	2.15
1.00	-0.03	324	1.64
1.10	-0.01	277	1.04
1.20	-0.05	225	0.757
1.30	-0.03	221	0.596
1.40	0.01	201	0.486
1.50	0.03	185	0.409
1.60	0.03	172	0.347
1.70	0.03	160	0.299
1.80	0.02	150	0.260
1.90	0.01	141	0.229
2.00	0.01	133	0.203
2.50	-0.02	105	0.123
3.00	-0.02	86.9	0.083
4.00	-0.02	64.7	0.046
5.00	-0.01	51.6	0.029
6.00	-0.01	42.9	0.020
7.00	-0.01	36.8	0.015
8.00	-0.01	32.1	0.011
9.00	-0.01	28.6	0.009
10.0	0.00	25.7	0.007

**Frequency Response**

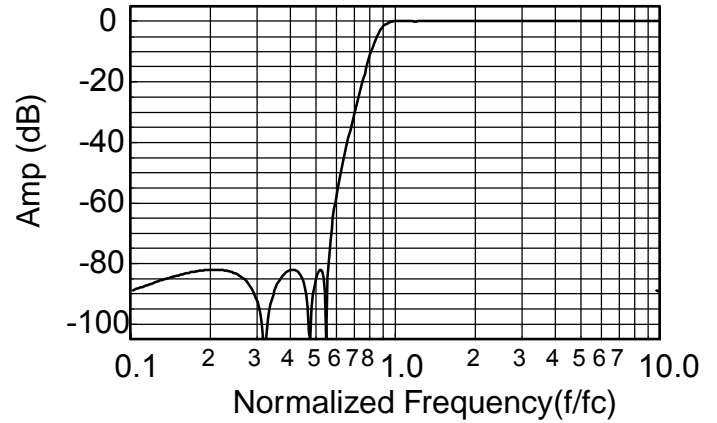

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$




**Appendix A**

**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.10	-110	168	0.338
0.20	-105	156	0.348
0.30	-114	323	0.367
0.40	-110	309	0.397
0.50	-107	654	0.445
0.55	-78.6	646	0.480
0.60	-64.6	637	0.524
0.70	-44.1	615	0.669
0.80	-26.7	586	1.001
0.85	-18.2	565	1.401
0.90	-9.46	533	2.315
0.95	-2.16	478	3.604
1.00	-0.046	419	2.681
1.10	-0.038	352	1.416
1.20	-0.001	308	1.018
1.30	-0.032	277	0.773
1.40	-0.046	252	0.618
1.50	-0.034	231	0.514
1.60	-0.016	214	0.436
1.70	-0.004	200	0.376
1.80	0.000	187	0.328
1.90	-0.003	176	0.288
2.00	-0.010	166	0.255
2.50	-0.042	131	0.153
3.00	-0.045	108	0.103
4.00	-0.028	80.6	0.057
5.00	-0.015	64.2	0.036
6.00	-0.008	53.4	0.025
7.00	-0.005	45.7	0.018
8.00	-0.003	40.0	0.014
9.00	-0.002	35.5	0.011
10.0	-0.001	31.9	0.009

**Frequency Response**

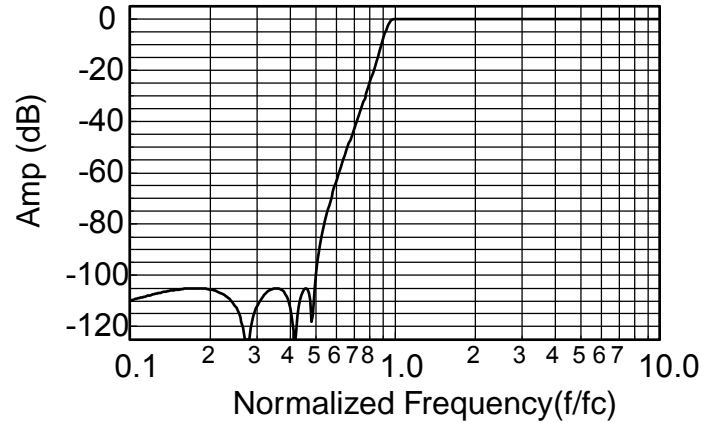

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0 Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$