



26-pin HD female / 26-pin HD female

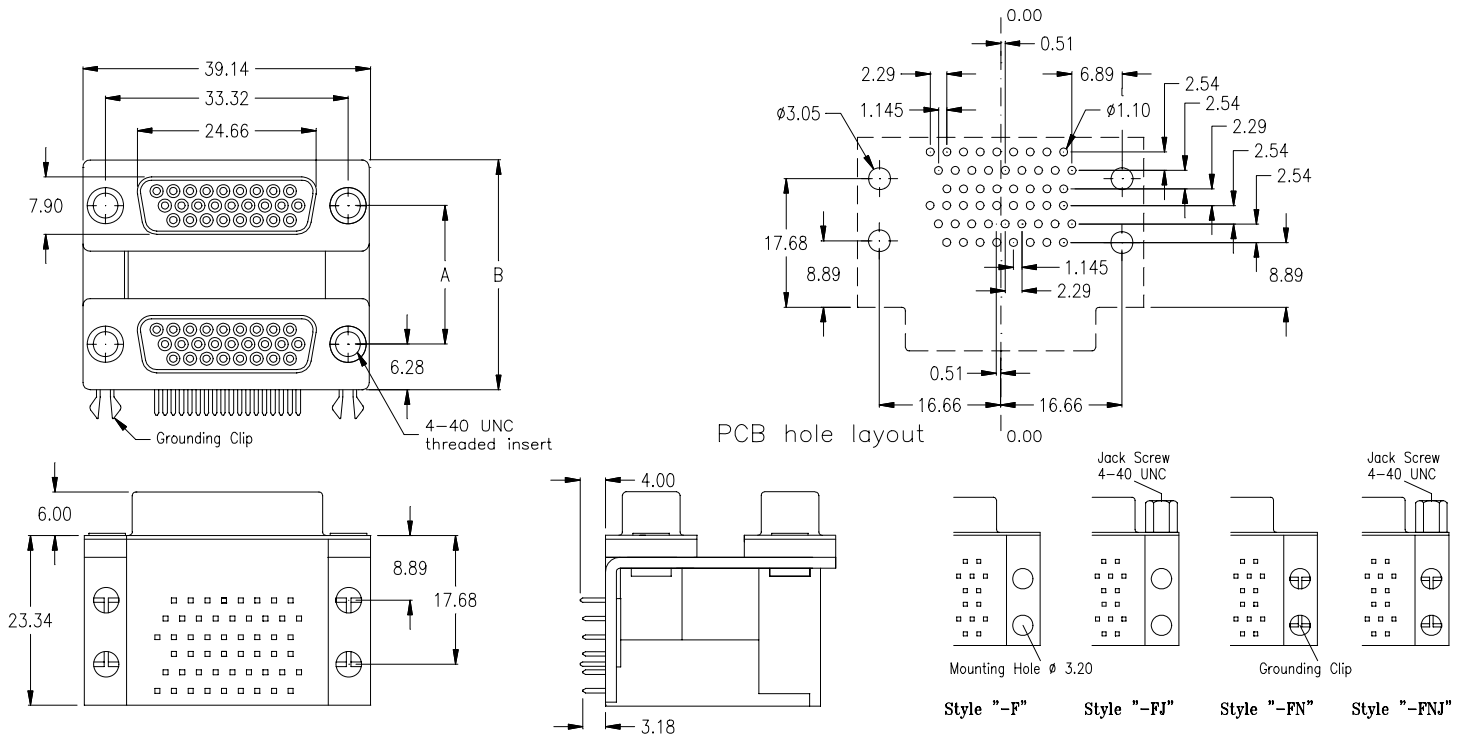

without grounding clips just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions
SDD-H26H26-2-95-F	SDD-H26H26-2-95-FJ	SDD-H26H26-2-95-FN	SDD-H26H26-2-95-FNJ	„A“ = 19.05 „B“ = 31.60

26-pin HD female / 26-pin HD male

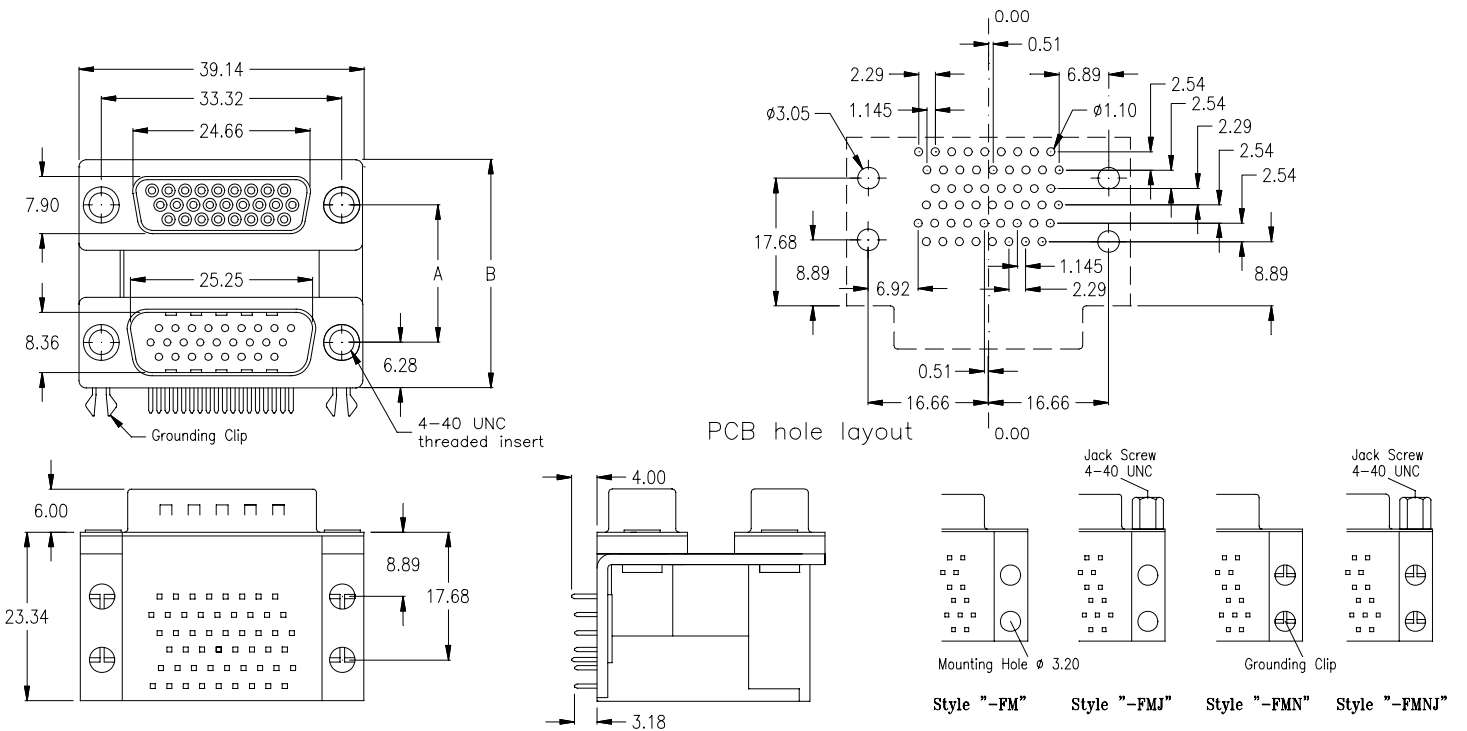

without grounding clips just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions
SDD-H26H26-2-95-FM	SDD-H26H26-2-95-FMJ	SDD-H26H26-2-95-FMN	SDD-H26H26-2-95-FMNJ	„A“ = 19.05 „B“ = 31.60