

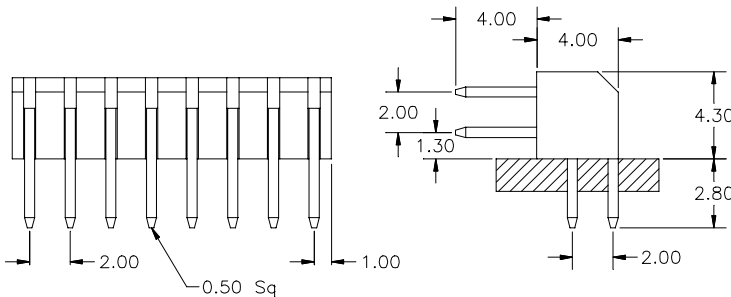



2.00mm pitch Pin Header  
 - THT - high plastic base



R430

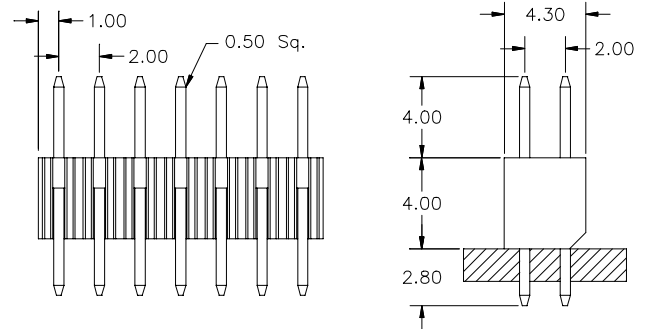


S400

**SPECIFICATIONS**

Current rating	1 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material <i>(RoHS compliant)</i>	Copper alloy
Insulator material <i>(RoHS compliant)</i>	Nylon UL 94 V-0

**PCB Hole Layout**

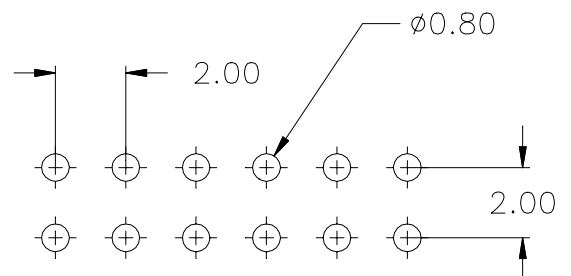

**APPLICATION AND FEATURES**

- Side stackable
- Mate with 2.00 mm pitch female and shunt connector
- Standoff's facilitate post solder cleaning

How to order

SE 2 - xxx - X xxx - xx / 2

Nbr of contacts
004 to 080

Terminal style
S400 = straight
R430 = right angle

Plating
55 = gold
95 = tin/gold <i>(tin leadfree)</i>
others on request