




SS Series - SMT HD D-Sub 90°  
HU98 Ultra Slim Profile

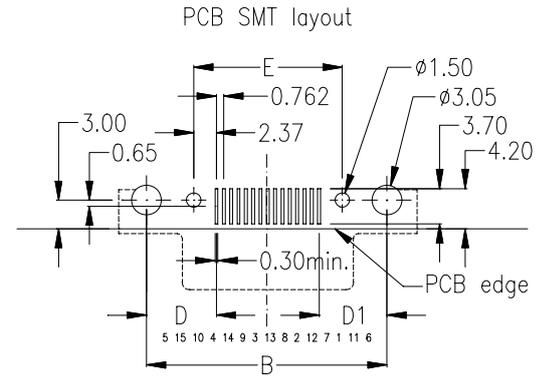

**female** – with fork board lock type –

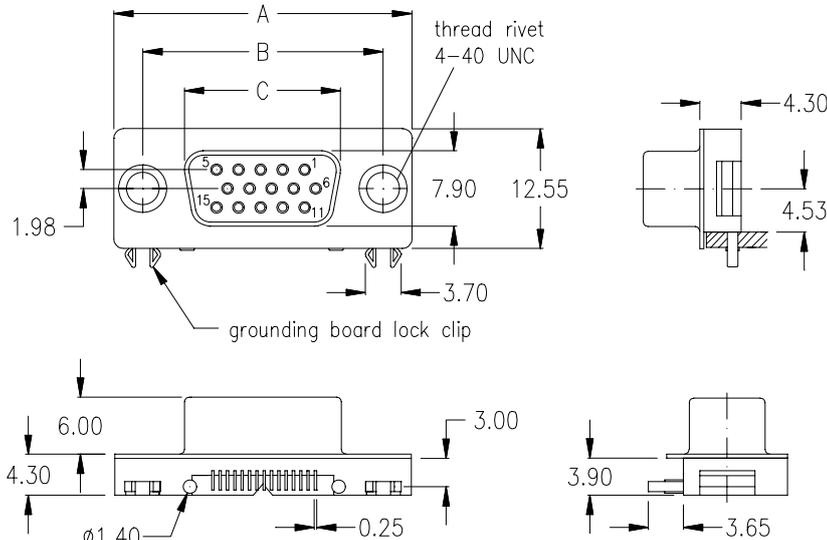

**Option:**

Jack Screw has to be ordered separately.  
See page 70

for technical & electrical specification please go to page 72




No. of contacts	Dimension					
	A	B	C	D	D1	E
015	30.81 1.213	24.99 .984	16.33 .643	7.296 .287	7.026 .277	15.46 .609

**Ordering Code**

**SSF - 015 - HU98 - 95 / N**

Plating: -95= tin(leadfree)/gold

**female** – with round board lock type –

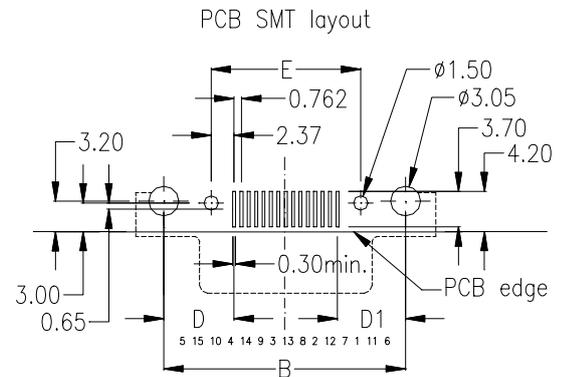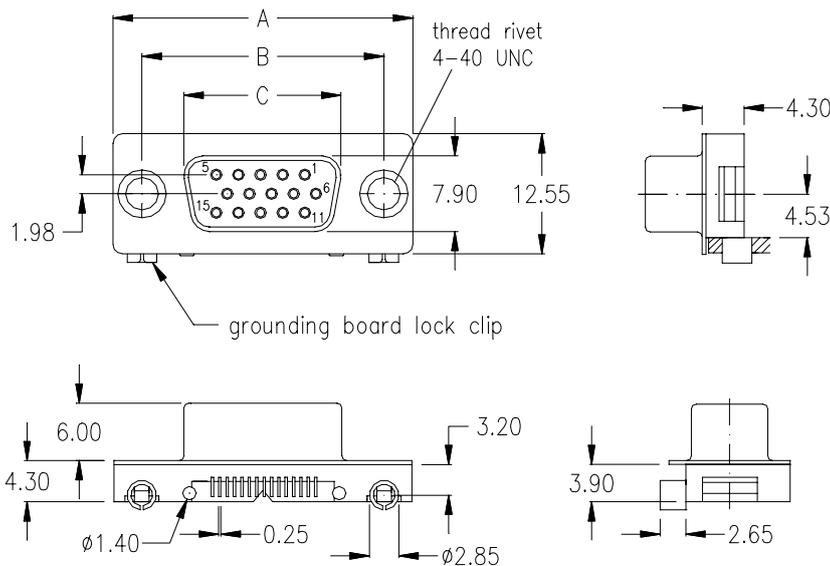

**Option:**

Jack Screw has to be ordered separately.  
See page 70

for technical & electrical specification please go to page 72

No. of contacts	Dimension					
	A	B	C	D	D1	E
015	30.81 1.213	24.99 .984	16.33 .643	7.296 .287	7.026 .277	15.46 .609

**Ordering Code**

**SSF - 015 - HU98 - 95 / R**

Plating: -95= tin(leadfree)/gold