
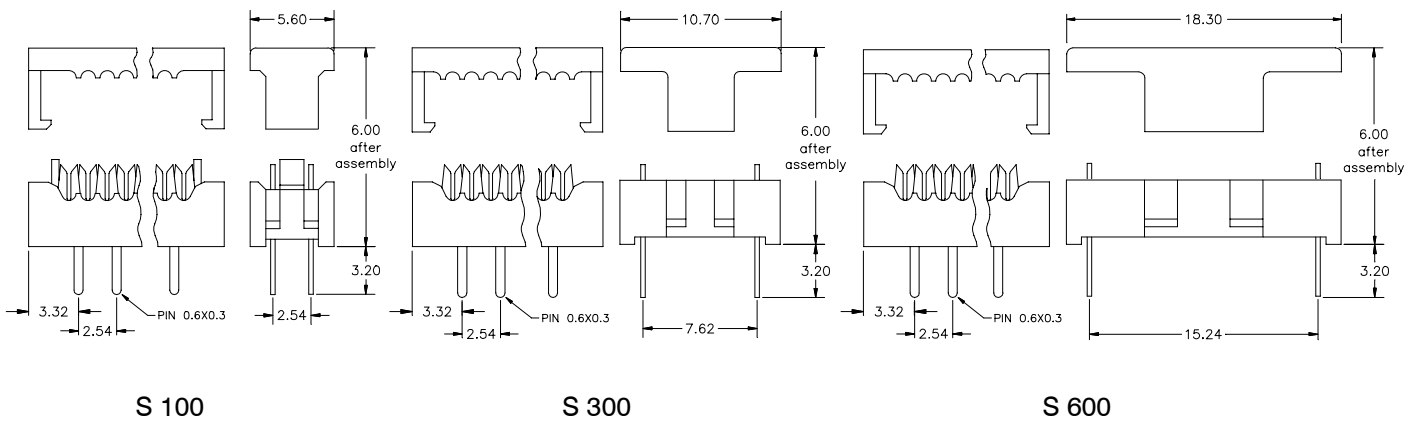
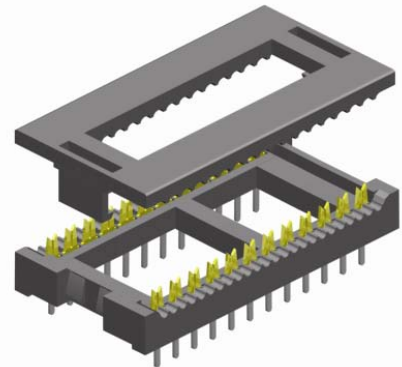




IDC – DIP Plugs 2,54mm
 IDC pitch 1,27mm



APPLICATION AND FEATURES

- A perfect solution for attaching a 1,27mm flat ribbon cable to a PC-board
- Low-profile, only 6,00mm above board
- Designed for direct soldering to a PC-board

P. C. B. Hole Layout

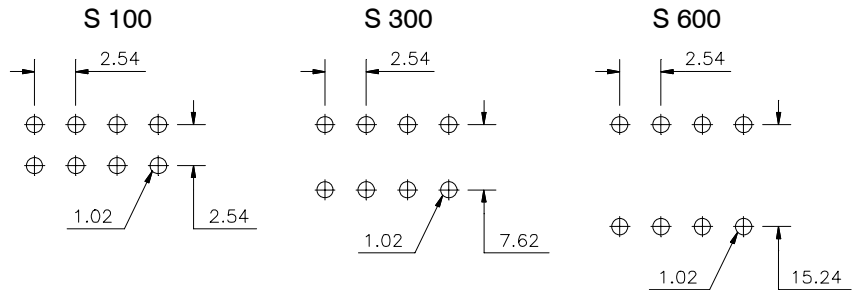

SPECIFICATIONS

Current rating	1 A	Operating temperature	- 40° to +105°C
Insulator resistance	3000 MΩ min.	Contact material	(RoHS compliant) Phosphor Bronze
Contact resistance	30 mΩ max.	Insulator material	(RoHS compliant) P.B.T. UL 94 V-0
Dielectric withstanding	AC 500 V		

How to order

IDP - xxx - S xxx - xx

Nbr of contacts			DIP Plug type		Plating
S 100 Type	S 300 Type	S 600 Type	Code	Pitch (mm/inch)	
006; 008; 010; 012 014; 016; 020; 024 026; 030; 034; 040 050; 060; 064	008; 010; 014 016; 018; 020 024; 028; 040	024; 028; 032 036; 040	S 100	2,54 / .100	N5 = nickel/gold (nickel on IDC area)
			S 300	7,62 / .300	95 = tin/gold (tin leadfree)
			S 600	15,24 / .600	95 = tin/gold (tin leadfree)