



REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	11/13/08	JAG

F8120

NOTES

1. Bandwidth: HIGH-SPEED, DC ~GHz
2. Length of current-carrying part: 7mm
3. Conductor resistance: 5mΩ
4. Contact resistance: 10mΩ
5. Withstanding voltage: 80VDC
6. Operating temperature rating: 0°C ~ 80°C (no condensation)

The use of a magnifying glass is advised when looking at the tip.

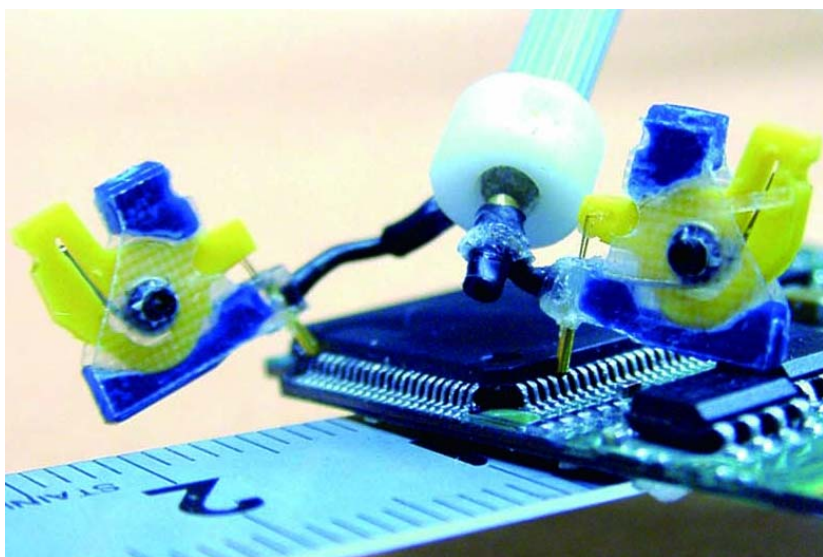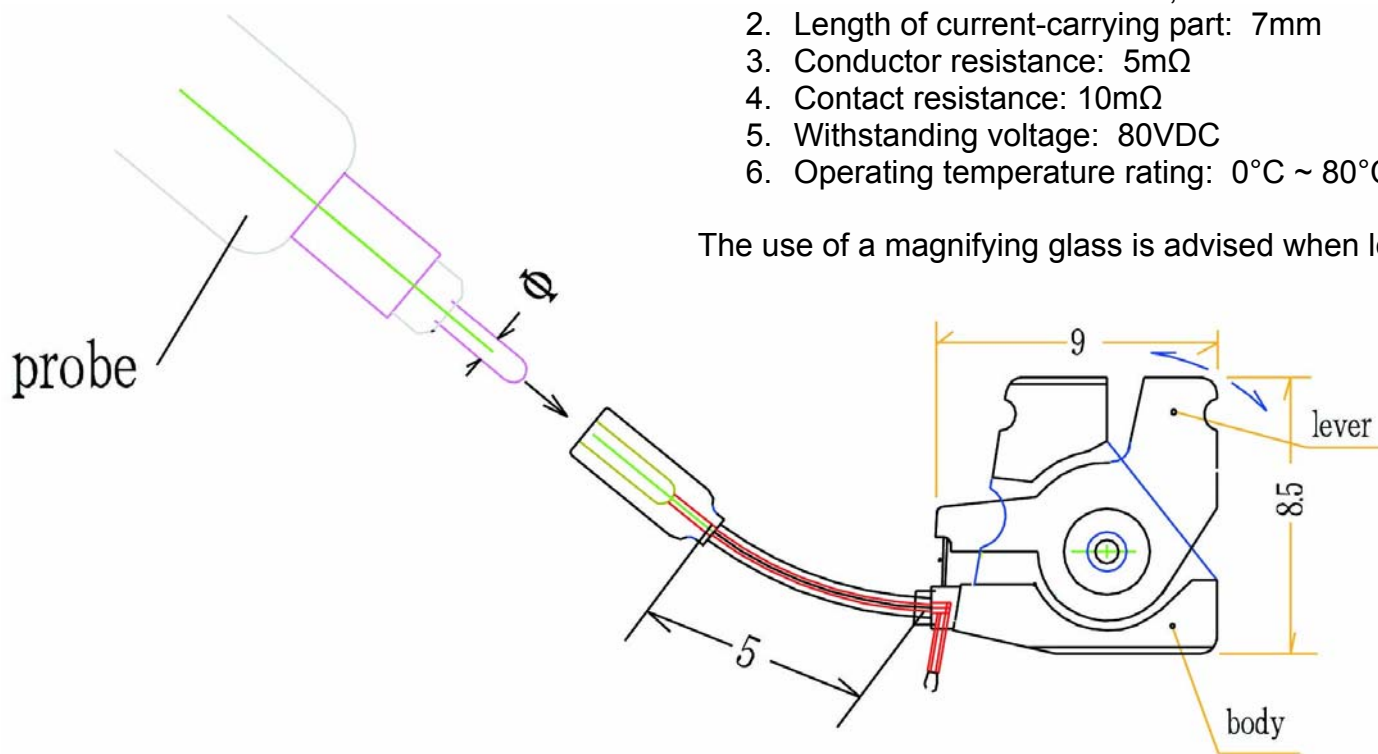

Item #	Accessible IC Pitch	Probe Side Pin Contact Size Φ	Color	
			Body	Lever
FPN-CCMF	0.65 ~ 1.25	0.65 ~ 0.86	Blue	Yellow
FPN-CCSF	0.3 ~ 0.65	0.65 ~ 0.86	Red	Yellow
FPN-CCMK	0.65 ~ 1.25	0.38 ~ 0.64	Blue	Yellow
FPN-CCSK	0.3 ~ 0.65	0.38 ~ 0.64	Red	Yellow

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

ET	EMULATION TECHNOLOGY, INC.	
	VLSI and SMT ADAPTERS and ACCESSORIES	
759 FLYNN ROAD CAMARILLO, CA 93012		TEL: (805) 383-8480 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 11/13/08	REVISION: A	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: J. GELACIO	ITEM: FPN-CCXY	DESCRIPTION: COAXIAL HOT
DO NOT SCALE DRAWING			