
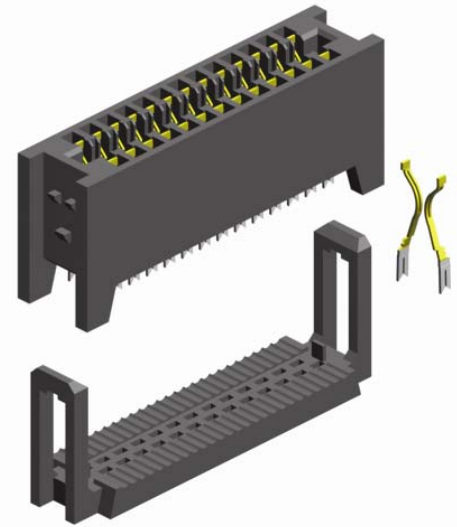


IDC – Card Edge Connector


2.54mm pitch

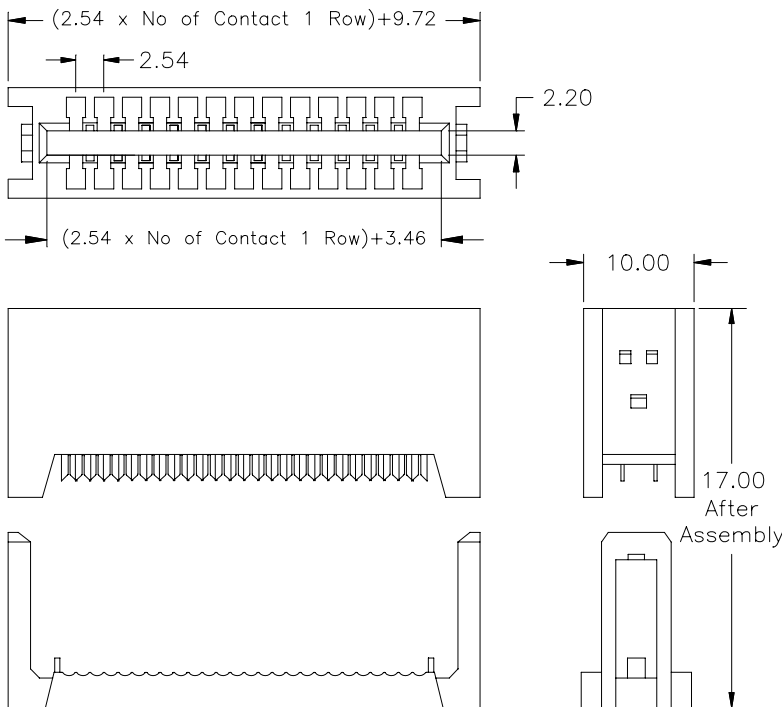

SPECIFICATIONS

Current rating	3 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding	AC 500 V
Operating temperature	- 40° to +105°C
Contact material (RoHS compliant)	Phosphor Bronze
Insulator material (RoHS compliant)	P.B.T. UL 94 V-0

Recommended PCB dimensions

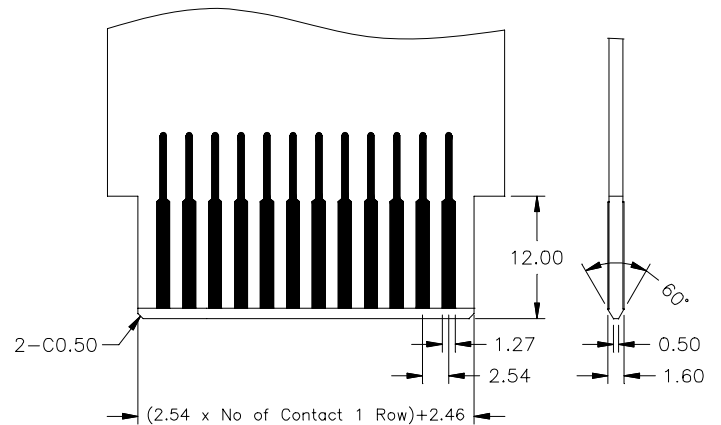

APPLICATION AND FEATURES

Hi-rel dual beam contact for reliable PCB connections.
 Accepts PCB thickness of 1.37 to 1.78mm.
 Insulation displacement termination for 1.27mm flat cable.

How to order

IDC - xxx - W100 - N5

Nbr of contacts

010; 020; 026
034; 040; 050

Plating

N5
 Nickel in crimp & gold in contact area

others on request