




# REVENUE-GRADE SPLIT-CORE CURRENT TRANSFORMER JSXXF-XXX-333mV series



## HOW TO USE

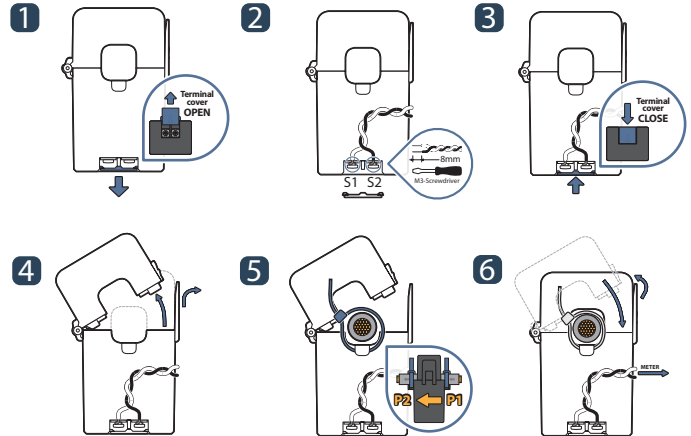

JS series of split-core current transformer offers 333mV at secondary from sensed primary current. Without using secondary CT inside of meter, users directly connect JS series to a meter for high accuracy metering application. It enables one meter to be adopted for various current rating by only changing primary CT so it makes compact design meter and reduces developing cost. Also, over-voltage protection circuit is included to offer safe, fast and cost effective installation.

### APPLICATIONS

- Energy sub - meter
- Power meters
- Power quality monitoring
- HVAC&Pumps, etc
- Distributed measurement system

### FEATURES

- PC spring, output-terminal, secure locking hinge, one-touch structure make easy to install to the existent equipments such as a power distribution boards.
- Isolated plastic case recognized according to UL94-V0
- UL / EN 61010 - 1 certified

### BENEFITS

- Small-size, light-weight
- Simple Installation
- Over-Voltage protection circuit is installed.

### NOTICE

- If you impact the core surface, internal core material could be damaged.
- Customizing output lead wire

### SPECIFICATION

Accuracy	Class 0.5S / 1.0
Output Terminals	2 X M3-Screw, with Terminals cover
System Voltage	720V(0.72kV)
Overload withstand	1.2 times rated current continuously
Compliant with	IEC/EN61869-2 & IEC61010-1
Operating Temperature Range	-20°C to 55°C
Relative Humidity	0-85% non-condensing
Test Voltage	3kV for 1 minute
Frequency Range	50/60Hz
Protection Level	3.0V0-P
Insulation Category	CAT II or CATIII 600VAC



## CURRENT TRANSFORMER RATIOS / DIMENSIONS

### How to Order / Model Reference

eg **J S 1 7 F - 0 0 0 / 3 3 3 mV**

Model **J S 1 7 F**

Primary Current

Select code from ratio table

Secondary Voltage

333mV

**3 3 3 mV**

### Current Transformer Ratios

Primary Current (A)	Metering Burden(VA)			Code
	cl. 0.25	cl. 0.5S	cl. 1	
	cl. 0.3	cl. 0.6	cl. 1.2	
50			0.05	050
100			0.05	100
125			0.05	125
150			0.05	150

333mV Secondary

### How to Order / Model Reference

eg **J S 2 4 F - 0 0 0 / 3 3 3 mV**

Model **J S 2 4 F**

Primary Current

Select code from ratio table

Secondary Voltage

333mV

**3 3 3 mV**

### Current Transformer Ratios


Primary Current (A)	Metering Burden(VA)			Code
	cl. 0.25	cl. 0.5S	cl. 1	
	cl. 0.3	cl. 0.6	cl. 1.2	
200		0.05		200

333mV Secondary

Accuracy conforms to IEC61869-2 & IEEE/ANSI C57.13 meets the measuring range from 1 to 120 % of In

Accuracy conforms to IEC61869-2 & IEEE/ANSI C57.13 meets the measuring range from 1 to 120 % of In

### Dimensions

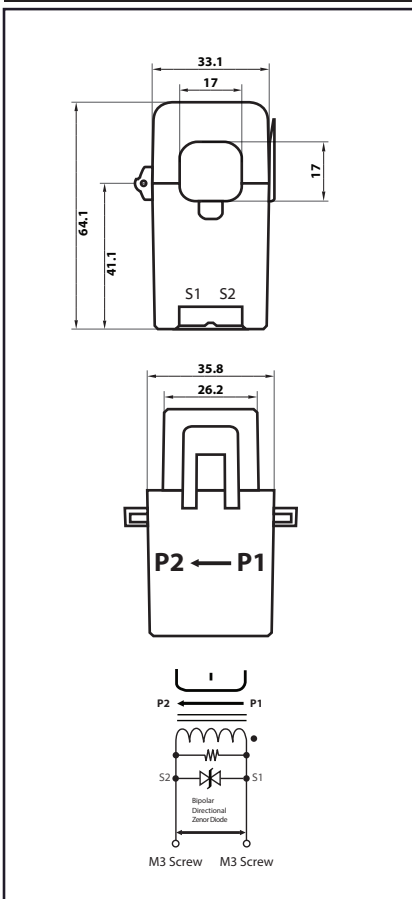

### Dimensions

