


Waveseal Z-Axis Conductive Foam Shielding material is perfectly suited for applications requiring excellent Shielding Effectiveness and low closure force. This cost effective solution consists of two layers of highly conductive and tear resistant polyester fabric covering one layer of conductive polyurethane foam. Provided in sheet form, the material is extremely versatile and can easily be fabricated into various shapes and sizes including I/O Panels, Connector Gaskets, Backplanes and Access Panels.

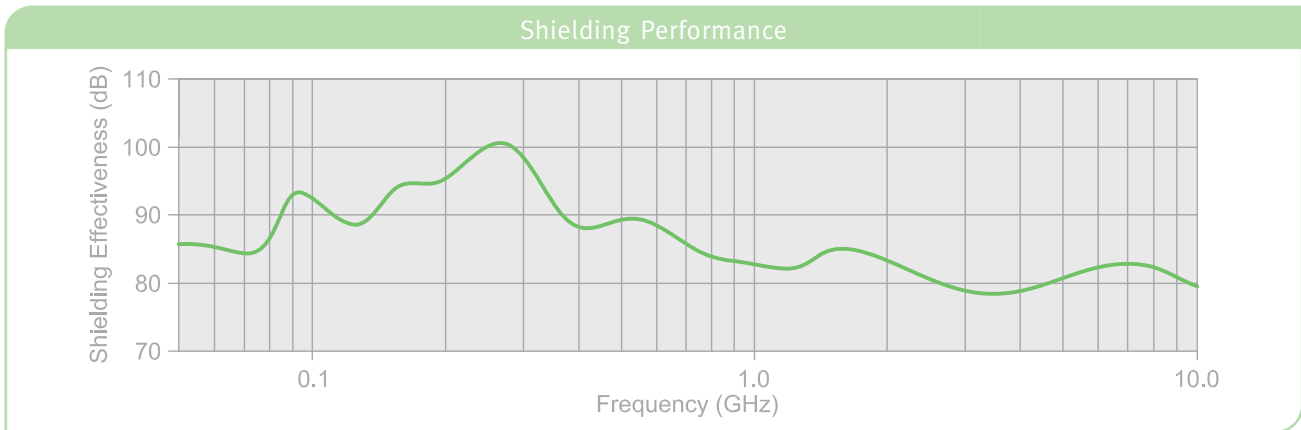

### Sheet Stock

Sheet Thickness	(250x250)	(500x500)	(500x1000)	(1000x1000)
.040 (1.0)	WS-4110-01-A	WS-4210-02-A	WS-4310-03-A	WS-4410-04-A
.060 (1.5)	WS-4115-01-A	WS-4215-02-A	WS-4315-03-A	WS-4415-04-A
.080 (2.0)	WS-4120-01-A	WS-4220-02-A	WS-4320-03-A	WS-4420-04-A
.100 (2.5)	WS-4125-01-A	WS-4225-02-A	WS-4325-03-A	WS-4425-04-A
.120 (3.0)	WS-4130-01-A	WS-4230-02-A	WS-4330-03-A	WS-4430-04-A
.140 (3.5)	WS-4135-01-A	WS-4235-02-A	WS-4335-03-A	WS-4435-04-A

### Properties

- Shielding Effectiveness: 75dB (min) 10MHz - 10GHz
- Z-Resistivity: < .2 Ω/sq.
- Temp Range: -40°F to 200°F
- Avg. Compression: 2PSI @ 30%
- RoHS & REACH Compliant

### Features

- High Shielding Performance
- Very Low Compression Force
- Cuts Easily into Intricate Shapes
- Standard with Conductive PSA
- Easy to Peel and Stick

### Applications

- I/O Panels
- Connector Gaskets
- Backplanes
- Access Panels
- Door Seams
- PCB Shielding

For more information visit [www.3Gmetalworx.com](http://www.3Gmetalworx.com)  
888-965-3634      [sales@3gmetalworx.com](mailto:sales@3gmetalworx.com)