

## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz

Rev. V1

### Features

- Always ON loop-through path
- 4-Way Splitter
- 2.5 dB Gain
- +15 dBmV/Channel Input
- 4.5 dB Noise Figure
- Lead-Free 3 mm 12-Lead PQFN Package
- RoHS\* Compliant and 260°C Reflow Compatible


### Description

The MAAM-009778 CATV 4-way active splitter with the default loop-through path is a GaAs MMIC which exhibits low noise figure and distortion in a lead-free 3 mm 12-lead PQFN plastic package. The design features 75  $\Omega$  inputs and outputs.


The MAAM-009778 is ideally suited for multi-tuner set top boxes, home gateways, and other broadband internet based applications.

The MAAM-009778 is fabricated using M/A-COM Technology Solutions' E/D pHEMT process to realize default loop-through operation, low noise and low distortion. The process features full passivation for robust performance and reliability.

### Functional Schematic, Default On, Power Off

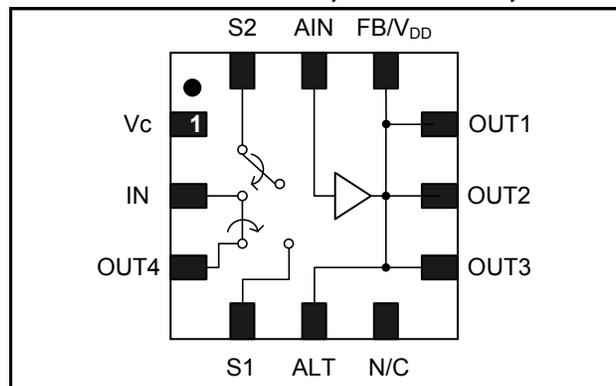

### Functional Schematic, Power On

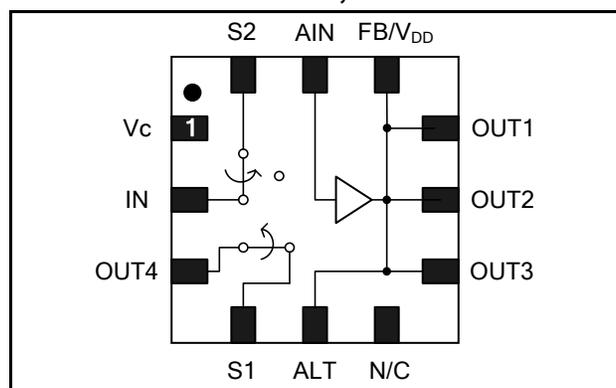

### Pin Configuration

Pin No.	Pin Name	Description
1	V <sub>c</sub>	Voltage Control
2	IN	RF Input
3	OUT4	RF Output 4
4	S1	Switch Input
5	ALT	Alternate Output
6	N/C	No Connection
7	OUT3	RF Output 3
8	OUT2	RF Output 2
9	OUT1	RF Output 1
10	FB/V <sub>DD</sub>	Amplifier Feedback / Drain Voltage
11	AIN	Amplifier Input
12	S2	Switch Output
13	Paddle <sup>3</sup>	RF and DC Ground

3. The exposed pad centered on the package bottom must be connected to RF and DC ground.

### Ordering Information <sup>1,2</sup>

Part Number	Package
MAAM-009778-TR1000	1000 piece reel
MAAM-009778-TR3000	3000 piece reel
MAAM-009778-001SMB	Sample Test Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz

Rev. V1

### Electrical Specifications<sup>4</sup>: Freq. = 1000 MHz, T<sub>A</sub> = 25°C, Z<sub>0</sub> = 75 Ω

Parameter	Test Conditions	V <sub>DD</sub> (V)	V <sub>C</sub> (V)	Units	Min.	Typ.	Max.
Gain	In to Out1, 2, or 3 In to Out4	5	3.3	dB	2 1.8	2.5 2.5	4.5 4.5
Insertion Loss	In to Out4	0	0	dB	-	0.75	1.0
Noise Figure	In to Out1, 2, 3, or 4	5	3.3	dB	-	4.5	-
Gain Flatness	In to Out1, 2, 3, or 4	5	3.3	dB	-	0.8	-
Input Return Loss	Input	5	3.3	dB	-	12	-
Input Return Loss	Input	0	0	dB	-	12	-
Output Return Loss	Output	5	3.3	dB	-	10	-
Output Return Loss	Output	0	0	dB	-	10	-
Out to Out Isolation	Out1 to Out2, 3 or 4	5	3.3	dB	-	22	-
Out to Out Isolation	Out1 to Out2 or 3	0	0	dB	-	35	-
CTB	132 Channels, +15 dBmV/Channel at the input	5	3.3	dBc	-	-65	-
CSO	132 Channels, +15 dBmV/Channel at the input	5	3.3	dBc	-	-60	-
Reverse Isolation	Out1, 2, 3 to In	5	3.3	dB	-	31	-
Reverse Isolation	Out4 to In	5	3.3	dB	-	23	-
Reverse Isolation	Out1, 2, 3 to In	0	0	dB	-	45	-
OIP2	500 MHz, 2-tone, 6 MHz spacing, -10 dBm Pout	5	3.3/0	dBm	-	42	-
OIP3	500 MHz, 2-tone, 6 MHz spacing, -10 dBm Pout	5	3.3/0	dBm	-	22	-
P1dB	500 MHz	5	3.3	dBm	-	6	-
P1dB	500 MHz	5	0	dBm	-	25	-
I <sub>DD</sub>		5	3.3	mA	-	100	130
I <sub>C</sub>		5	3.3	μA	-	230	250

4. The unpowered state is the same as V<sub>C</sub> = 0V

## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz

Rev. V1

### Absolute Maximum Ratings<sup>5,6,7</sup>

Parameter	Absolute Maximum
Max Input Power	+5 dBm
V <sub>DD</sub>	+10.0 V
V <sub>C</sub>	+8.5 V
Operating Temperature	-40°C to +85°C
Junction Temperature <sup>8</sup>	+150°C
Storage Temperature	-65°C to +150°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.
7. These operating conditions will ensure MTTF > 1 x 10<sup>6</sup> hours.
8. Junction Temperature (T<sub>J</sub>) = T<sub>A</sub> + Θ<sub>jc</sub> \* (V \* I)  
Typical thermal resistance (Θ<sub>jc</sub>) = 73 °C/W.
  - a) For T<sub>A</sub> = 25°C,  
T<sub>J</sub> = 72 °C @ 5.0 V, 130 mA
  - b) For T<sub>A</sub> = 85°C,  
T<sub>J</sub> = 129 °C @ 5.0 V, 120 mA


### Truth Table<sup>9</sup>

V <sub>DD</sub>	V <sub>C</sub>	IN - OUT1, 2 or 3	IN - OUT4
1	1	On	On
0	0	Off	On


9. Logic "1" for V<sub>DD</sub> = +5 volts and V<sub>C</sub> = +3.3 volts typical.

### Schematics Including Off-Chip Components<sup>10</sup>

#### Power On Condition

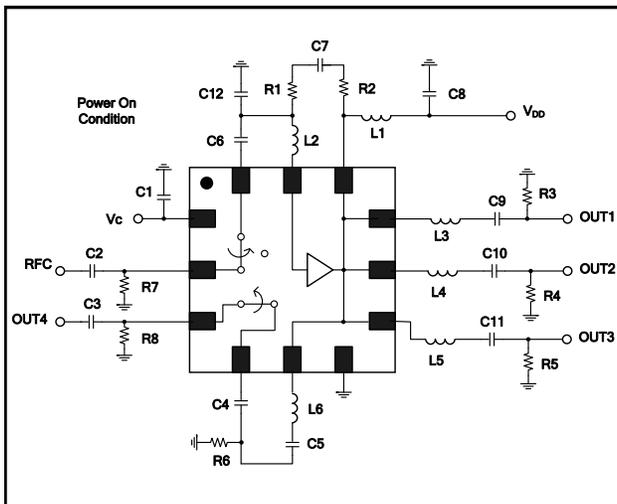

#### Power Off, Default on Condition

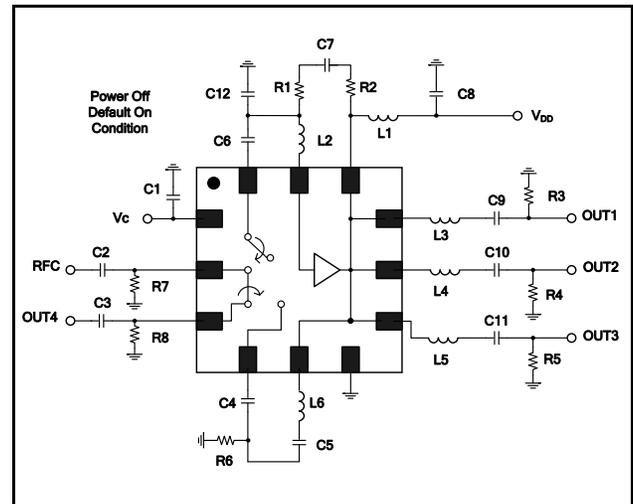


10. The exposed pad centered on the package bottom must be connected to ground for RF, DC and thermal considerations.


## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz

Rev. V1


### Recommended PCB

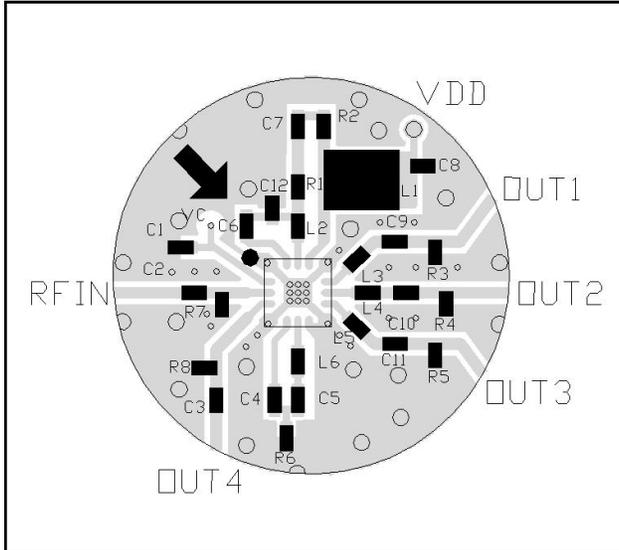

### PCB Land Pattern

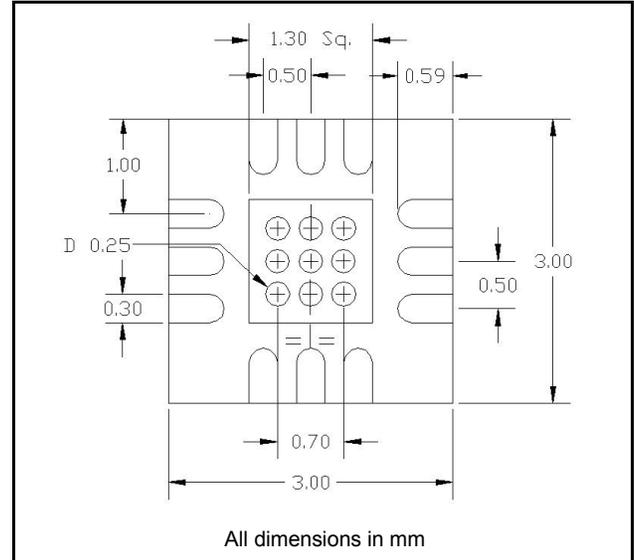

### Block Diagram RF Signal Flow

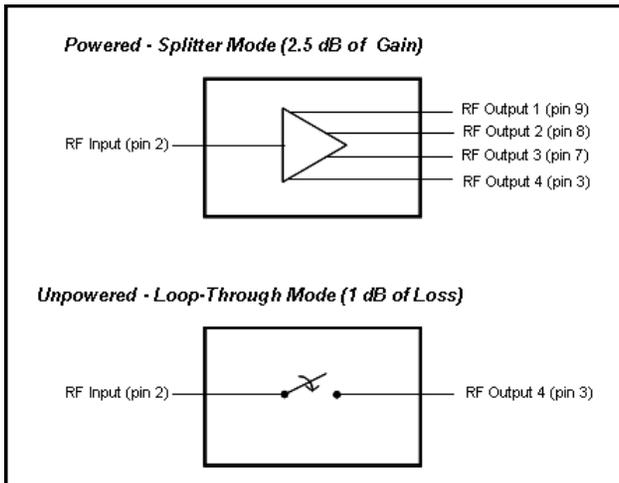

### Off-Chip Component Values


Component	Value	Package
C1 - C11	0.01 $\mu$ F	0402
C12	1.0 pF	0402
L1 <sup>11</sup>	1 $\mu$ H	1210
L2 - L6	7.5 nH	0402
R1, R2	300 $\Omega$	0402
R3 - R5	180 $\Omega$	0402
R6	250 $\Omega$	0402
R7, R8	22 K $\Omega$	0402

11. L1 supplied from EPCOS, part number B82422A1102K100


## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz

Rev. V1


### Typical Performance Curves




**Gain**

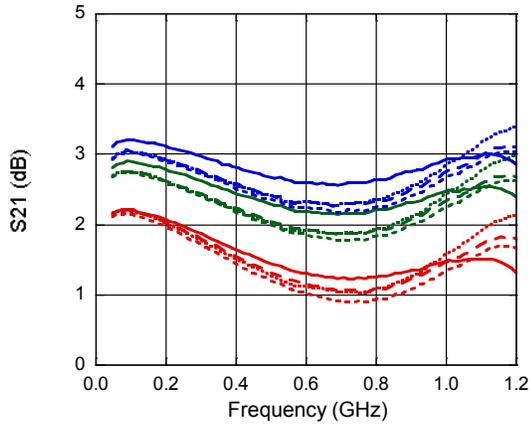


**Gain**

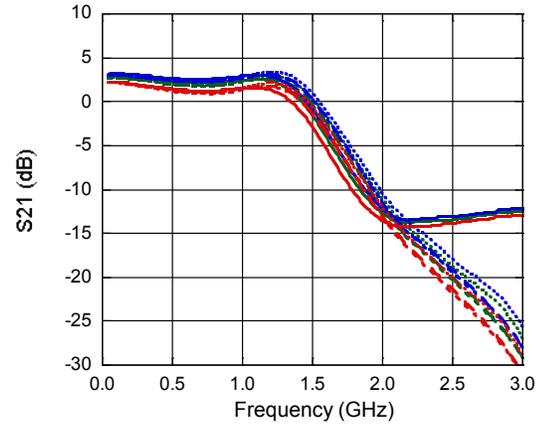


**Input Return Loss (power on)**

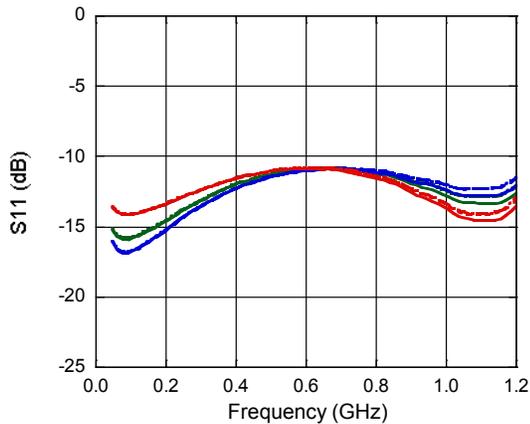


**Input Return Loss (power off)**

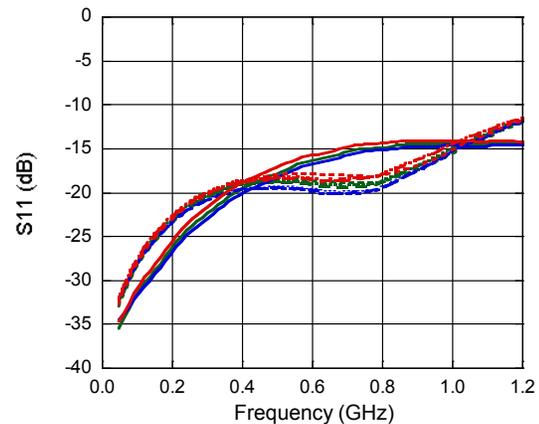

**Output Return Loss (power on)**

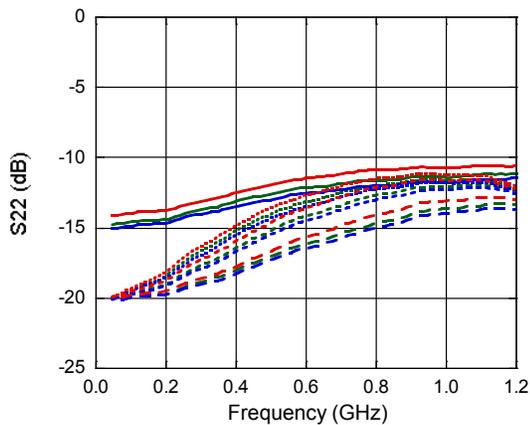

**Output Return Loss (power off)**

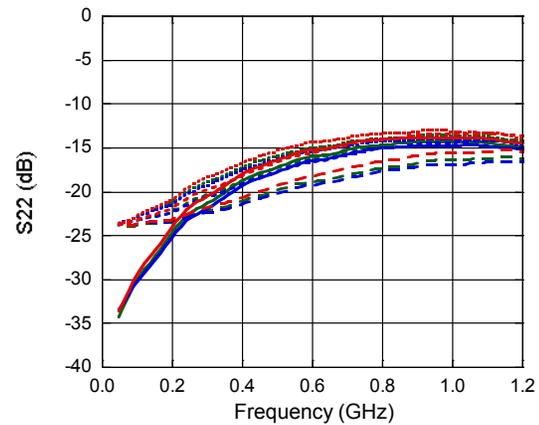


## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz


Rev. V1

### Typical Performance Curves


Insertion Loss to 1 GHz (power off)

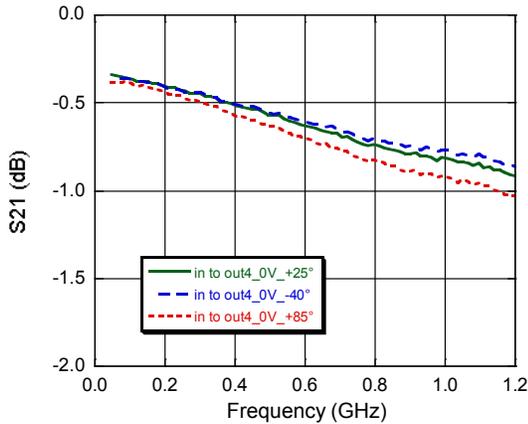


Insertion Loss to 3 GHz (power off)

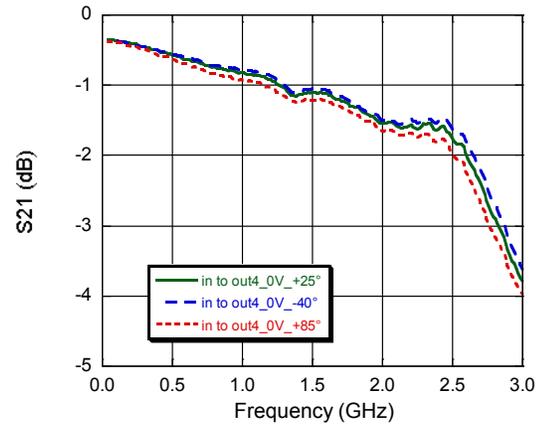


Reverse Isolation to 3 GHz (power on)

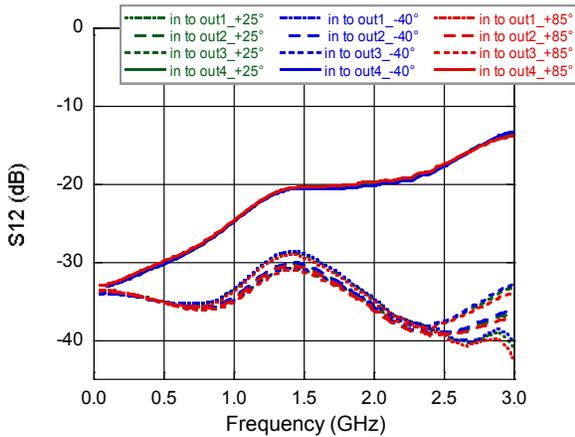

Reverse Isolation to 3 GHz (power off)

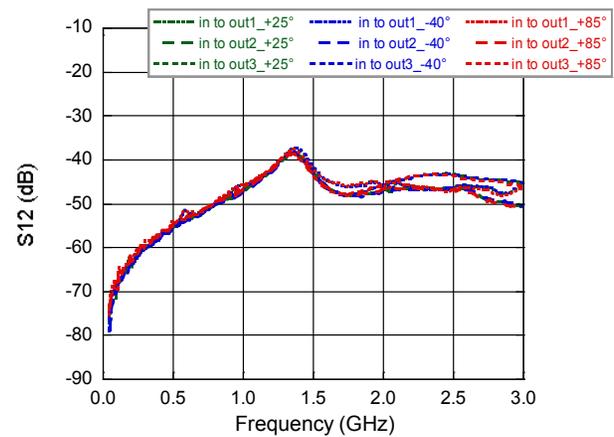


Noise Figure

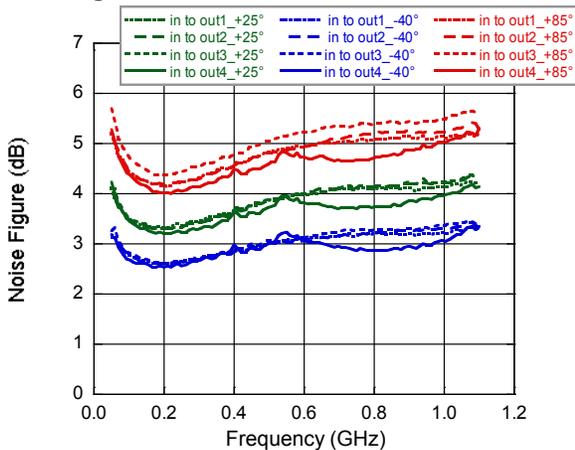


## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz

Rev. V1


### Typical Performance Curves

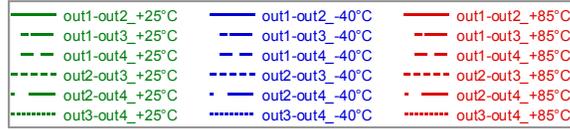


**Out to Out Isolation to 1 GHz (power on)**

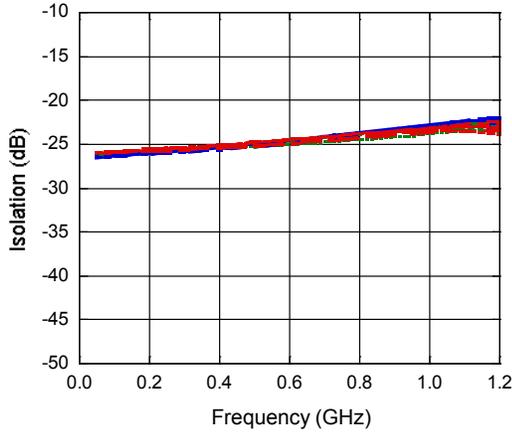


**Out to Out Isolation to 3 GHz (power on)**

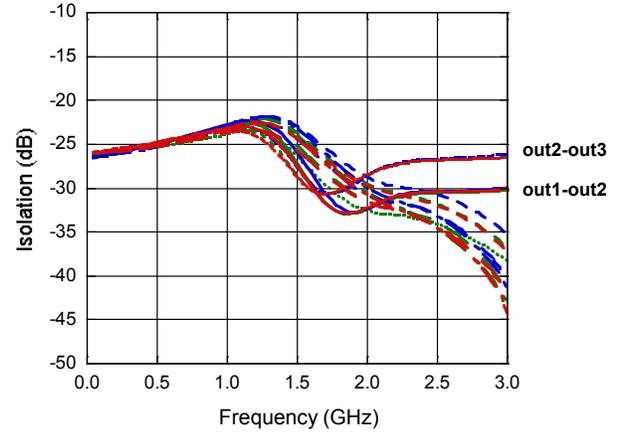

**Out to Out Isolation to 1 GHz (power off)**

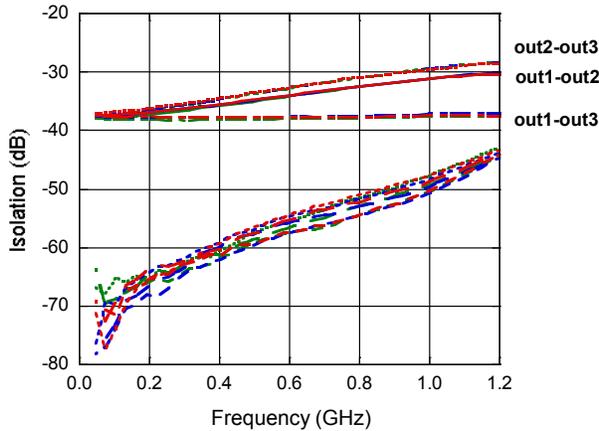


**Out to Out Isolation to 3 GHz (power off)**

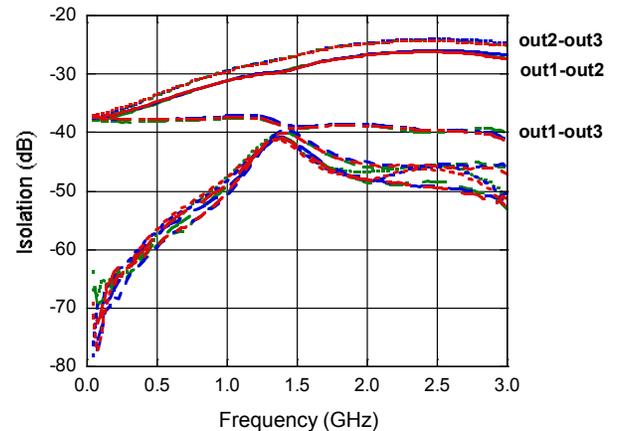

## Broadband CATV 4-Way Active Splitter with Default Loop-Through Switch 50 - 1100 MHz

Rev. V1

### Lead-Free 3 mm 12-Lead PQFN<sup>†</sup>

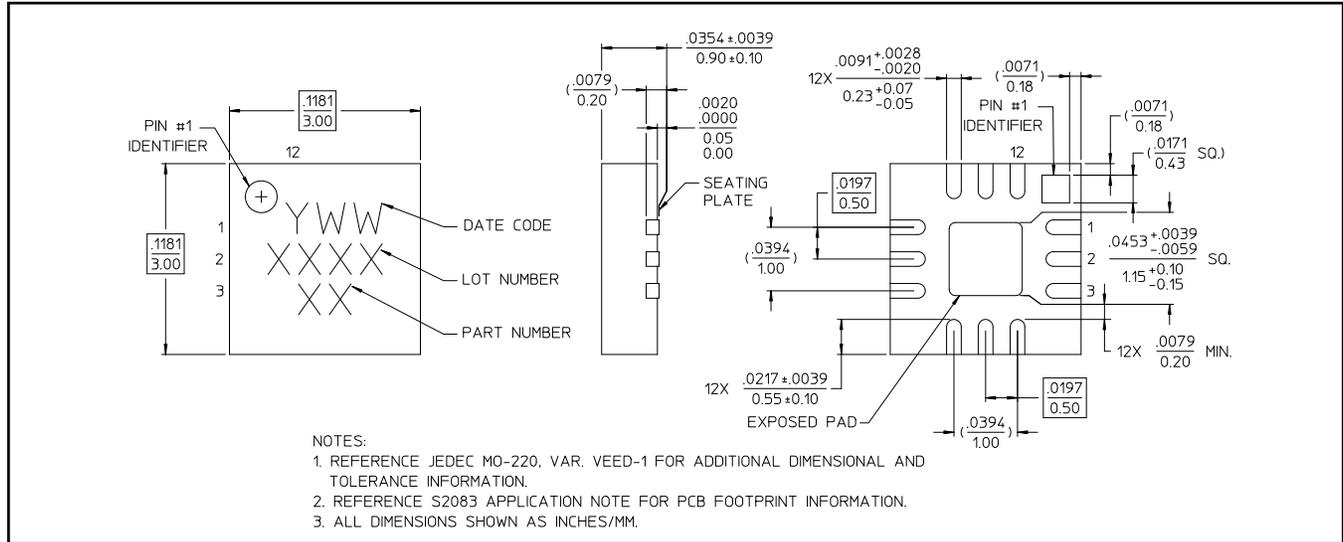

<sup>†</sup> Reference Application Note S2083 for lead-free solder reflow recommendations.  
 Meets JEDEC moisture sensitivity level 1 requirements.  
 Plating is 100% matte tin over copper.

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices. An external protection circuit using an anti-parallel diode pair can be used to protect the IC.

Please reference application note AN3028 on <http://www.macomtech.com> for further detail.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.