

NEW

Variable Range Output

Versatile DC Power Supplies

TB series

Max. output voltage : 35V to 1000V

Max. output current : 1A to 108A

Max. output power : 360W, 720W, 1080W

**720W
Model**



**1080W
Model**



**360W
Model**



Available for the pulse / ramp sequence operation without using a PC

Suppressing the overshoot is possible by the standard function that can change CV mode and CC mode optionally

The programmable internal resistance function allows you to simulate rechargeable batteries

TB series

DC power supplies
with wider
output coverage

1080W
Model



Wide range output is possible
with “turbo function” installed.

720W
Model



360W
Model



TB series is programmable DC power supply with distinctive turbo function which realises 3 times wider coverage of output voltage and current in comparison to conventional DC power supply with equivalent output power.

All TB series allow flexible voltage and current output within its rated power, resulting user not to require to search for power supply with unnecessary wider rated voltage and current. Thus single TB unit can be used for much wider user applicaton.

Not only its flexible output, but the general performance of the power supply is pursued to achieve overwhelming quality, resulting; power factor correction circuit with 0.99 power factor, speedy and accurate 4 digit display panel as well as adoption of precision rotary encoder. TB series's high energy efficiency contributes to user's reduction of CO2 emission.

Digital communication(*1) with LAN(Ethernet*2), USB, RS-232C, RS-485 and GPIB is optionally selectable, best for automatic measuring or integration to production equipment.

(*1) A conversion adapter or additional option is required separately.

(*2) Ethernet is the registered trademark of Xerox Co., Ltd.

Typical Applications

Evaluation of electric elements for automobile
Covered from 12V to Higher Volt. by this One Unit.

Evaluation for devices
For devices with different rated values.

Evaluation with series / parallel connected power supplies
Suitable for battery, capacitor evaluation with series / parallel connected power supplies.

Evaluation of Communication Equipment
To various Tests for Servers and Router.

Evaluation of Power Conditioners
For simulation of Solar Battery and Fuel Battery.

Features



It realizes **Wide Range Output** by installed **Turbo Function**.



CV / CC preference function helps to **suppress voltage / current overshoot** at output trigger.



Simplified Simulation of Secondary Battery, Solar Battery and Fuel Battery is possible with **the variable internal resistance**.



Usage for High Speed Response and Usage to Keep Voltage is applicable by **Switching Function for Sink/Anti-Sink**.



Best fit to Research and Development by **the Low Noise Switching System**.



Free to Service Space with **the Power Factor Correction Circuit** and **Worldwide Input System**.

Lineup




Model	Maximum Output			Ripple		Dim. (P.8-9)
	Volt	Current	Power	(mVrms)	(mA _{rms})	
TB35V36A360W	35V	36A	360W	10	70	A
TB35V72A720W		72A	720W	15	150	C
TB35V108A1080W		108A	1080W	20	200	E
TB80V14A360W	80V	14A	360W	10	30	A
TB80V28A720W		28A	720W	15	60	C
TB80V42A1080W		42A	1080W	20	80	E
TB160V8A360W	160V	8A	360W	15	20	A
TB160V15A720W		15A	720W	20	30	C
TB160V22A1080W		22A	1080W	25	50	E
TB250V5A360W	250V	5A	360W	20	15	A
TB250V10A720W		10A	720W	25	20	C
TB250V15A1080W		15A	1080W	30	25	E

Model	Maximum Output			Ripple		Dim. (P.9)
	Volt	Current	Power	(mVrms)	(mA _{rms})	
TB350V3A360W *	350V	3A	360W	25	15	B
TB350V6A720W *		6A	720W	30	20	D
TB350V9A1080W *		9A	1080W	35	25	F
TB650V1.6A360W *	650V	1.6A	360W	30	10	B
TB650V3.2A720W *		3.2A	720W	35	15	D
TB650V4.8A1080W *		4.8A	1080W	40	20	F
TB850V1.2A360W *	850V	1.2A	360W	35	5	B
TB850V2.4A720W *		2.4A	720W	40	10	D
TB850V3.6A1080W *		3.6A	1080W	45	15	F
TB1000V1A360W *	1000V	1A	360W	40	5	B
TB1000V2A720W *		2A	720W	45	10	D
TB1000V3A1080W *		3A	1080W	50	15	F

* The front panel does not have monitor terminals.

Images of Output Range

Possible to output wide range volt. and current compared with traditional DC power supplies by the turbo function.

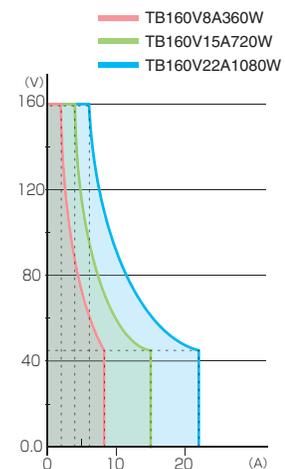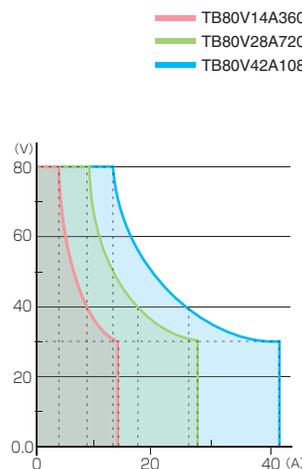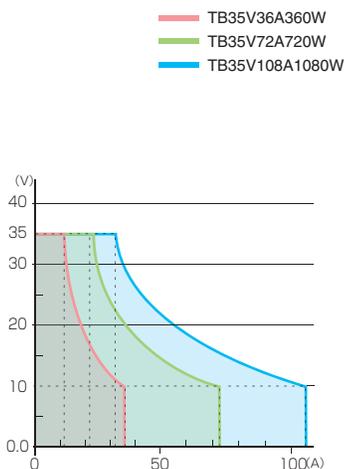


Principal Functions

Function for Pulse & Ramp Sequence and Master Follow

Output control as next A to D are possible.

A. Pulse Sequence


Sequential operation is possible by using voltage and current set on each memory a, b and c in combination with multi-set function. Not only continuous operation, but also it is possible to specify the times. It is best fit to evaluation tests for products as various operations, like as repeat of a and b only or repeat of b, c and off only, are enabled by setting time of memory a, b, c and off to 0.0.

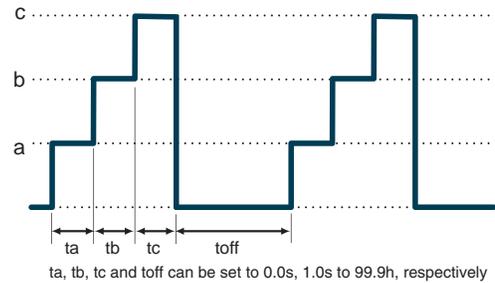

B. Ramp


It enables to make ramp action up to set voltage or current (or from the set voltage or current to 0V or 0A). It is useful to like to rise (reduce) voltage or current slowly. It helps sensitive electrical load not to get damaged by overshoot.

* For ramp action, it is possible to select “both of set voltage and current”, “only set voltage” or “only set current”.

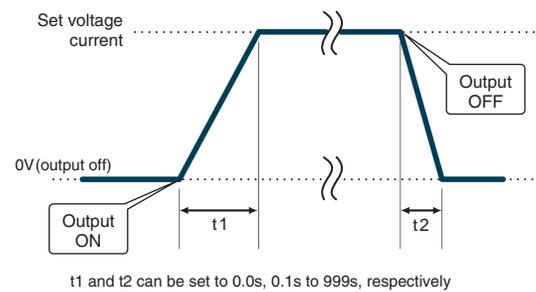

C. Pulse Sequence + Ramp


It is also possible to use pulse sequence combined with ramp action. If multi-set function is combined with the too, it is able to make sequence action by using voltage or current set on memory a, b and c. Not only continuous operation, but also it is possible to specify the times. It is useful in various aspects as it is possible to rise (reduce) voltage or current slowly up to 3 set value.

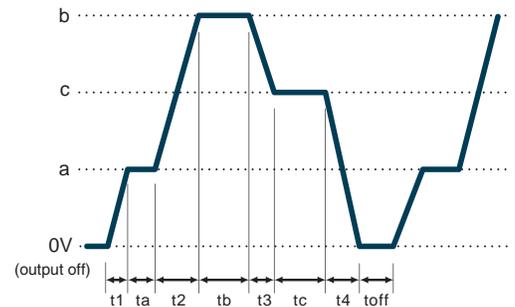

Range of 0.0s, 0.1s to 999s for t_1 to t_4 and range of 0.0s, 1.0s to 99.9h for t_a to t_c and t_{off} can be set respectively.

D. Master Follow



Pulse sequence actions at master-slave and output signal to slave units at ramp action are transmitted. By this function, it is possible to make slave units to output on different output condition from the master unit.

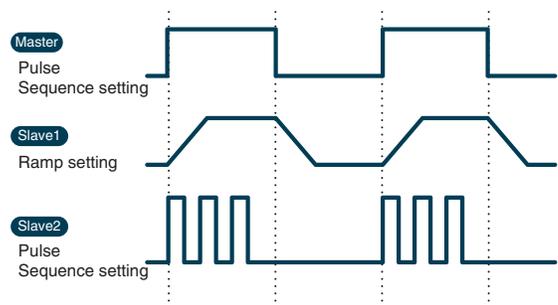

Note : Accuracy of the timer at sequence action $\pm 0.5\%$. Please take care usage at long running.

CC / CV Preferred setting

CV(constant voltage) or CC (constant current) preferred mode can be selectable. When a load is such as a diode whose resistance value can dramatically change at certain point, overshoot of current may take place if power supply is triggered on under CV mode. TB series can help suppress this overshoot by choosing CC mode trigger as preference. This feature is highly valued for lowering the risk of damaging expensive load typically such as high power laser diode module.

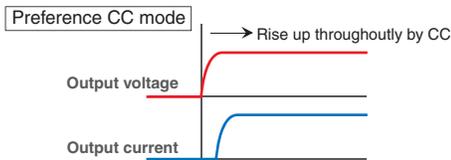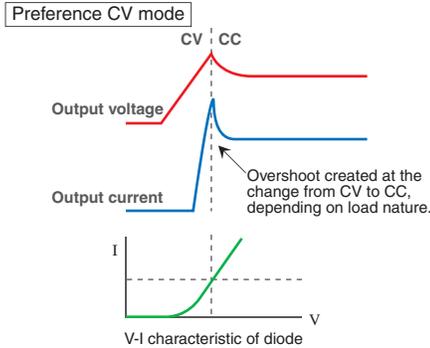


* More help not to create overshoot even at preference CC mode is to set the voltage as low as possible to such value that still allows CC mode operation, but not to set it maximum.

Internal resistance value variable function (CV mode only)

By setting the internal resistance value as any value, it causes voltage drop due to load current. This is best fit for simulating battery, solar cell panel, fuel cell battery. (Programmable range of the internal resistance value is 0Ω to rated voltage / rated current)

[Example]

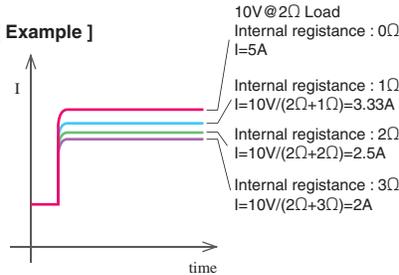

Function for Multi-setting


3 values for voltage and current are memorized in addition to usual ones of preset. It is very useful for experiment to collect repeatedly data and inspection of products.

2 Modes for Lock

Either of 2 Modes can be selected and set, "Full Lock" that locks all operation from the front panel or "Normal Lock" that locks only output ON / OFF. (the above 2 modes can stop the output emergently with the power switch.)

Switching function of Sink / Anti-Sink


Sink Function is built in power supplies. It is safe because it can lower voltage quickly even when it is at cut-off output and high voltage setting point. And, when make continuously burn-in with short interval, it is possible to disconnect and change work quickly after cut-off operation of output. Conversely, when supply power to battery, condenser and so on which is capacious load, it decrease reverse current from the load to power supplies and avoids voltage depression by using Anti-Sink Function at cut-off output or when lower setting voltage.

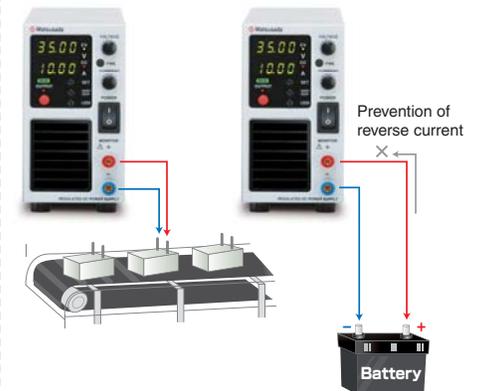

Note : It is impossible to stabilize by reverse current control. If the load is what reverse voltage becomes higher than rated voltage (induced load, regenerative motor, etc.), please protect the power supply by connecting dummy resistor, reverse current protection diode and so on.

Delayed Trigger Function

The delayed trigger function allows it to delay the time for output start and output stop and work based on it during OUTPUT ON/OFF. The delayed trigger function can be used when 1 unit of TB is used, of course. The delayed trigger function can also be used when output voltage / output current are set individually by connecting several Matsusada power supplies using master-slave connection terminal.

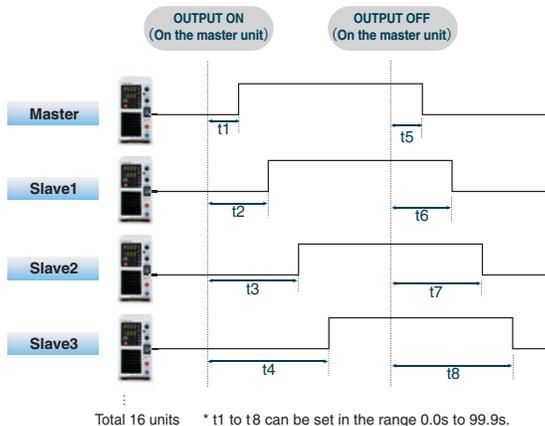


- *1 : R4K-36 series, R4K-80 series, RK-80 series, RK series and REK series. Detail catalog for each model is available. Please contact nearby sales office.
- *2 : Can be connected up to 16 units.
- *3 : Only for slave-local. In case of slave remote control, exact same model of power supply need to be used. Also, in case of slave-local, each output voltage and current can be set individually. In case of slave-remote, output voltage and current can be set with one-control function which each slave unit follows the master unit setting.

Dual Tracking and Multi-Output


By connecting power supplies to make the output of it become positive and negative at master-slave, the output of positive and negative can be controlled at the save time. (Dual tracking control) Multi-output can be configured in combination with actions of local mode and of dual tracking. Plus and minus output voltage and optional output voltage set on a local slave are outputted in synchronizing with ON of the master unit.

* As for connection, please refer to "examples for operation applied" on Page 11.

Dual Tracking

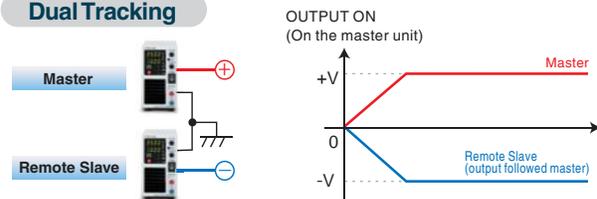


Multi Output

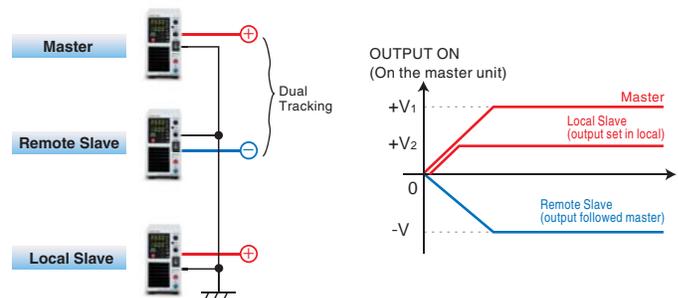

Principal Functions

Remote Switch ON / OFF

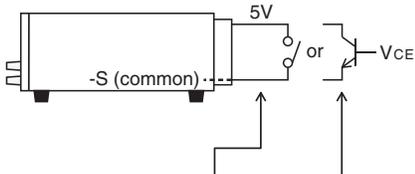

Output	Relay	Open Collector
ON	Short	$V_{CE} \leq 0.4V$
OFF	Open	$V_{CE} \geq 2V$


- Sink current 1mA
- Logic of OUTPUT can be made reverse.

Master-slave Control

(Digital interface)


Master unit can control multiple units connected as slave. Please refer to P.4 "D. Master Follow", P.5 "Delayed Trigger Function" and "Dual Tracking and Multi-Output".

* This is not a function for parallelly connected power supplies to give out average output current.

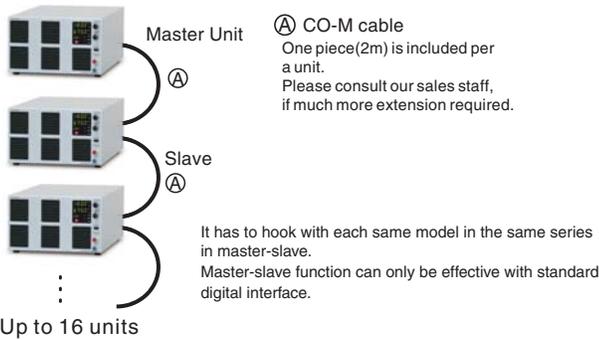


Digital Interface

In addition to digital control with LAN (Ethernet), USB, RS-232C, RS-485 and GPIB, one control is enabled in master-slave operation.

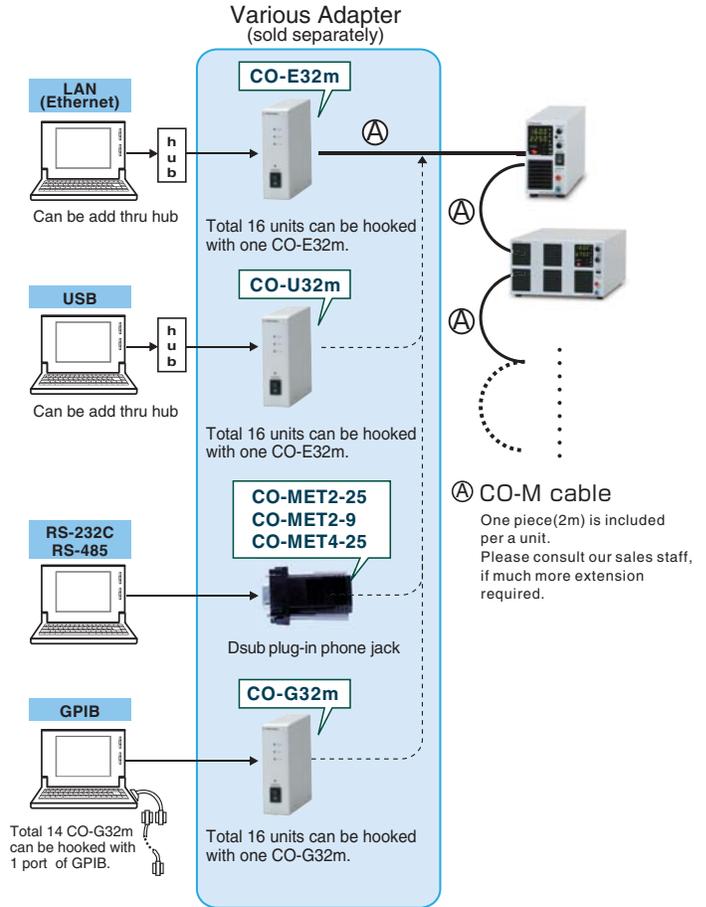

Remote Control


● Switching REMOTE / LOCAL



Mode	External Relay	TTL
REMOTE	short	LOW
LOCAL	open	HIGH


Each mode for Voltage, Current, OVP, OCP can be switched with relay or TTL signal.

● Output Monitor

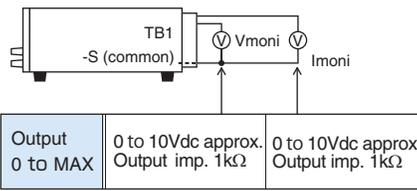

Output	0 to MAX	0 to 10Vdc approx. Output imp. 1kΩ	0 to 10Vdc approx. Output imp. 1kΩ
--------	----------	------------------------------------	------------------------------------


● Output Control

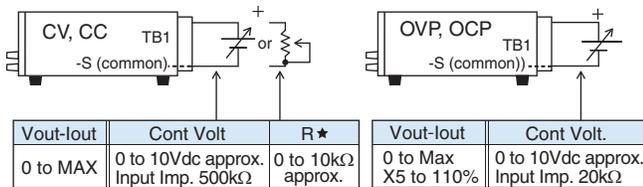

Vout-lout	Cont Volt	R★	Vout-lout	Cont Volt.
0 to MAX	0 to 10Vdc approx. Input Imp. 500kΩ	0 to 10kΩ approx.	0 to Max X5 to 110%	0 to 10Vdc approx. Input Imp. 20kΩ

★ Possible to switch 10kΩ to 0kΩ for Fail-Safe

● Output of Status



★ ON for the status of OVP, OCP, OTP, ACF reverse sense connection and interlock (LD).

COMMON is floating with the output of Open Collector for each COMMON. Voltage Resistance 30Vdc, Sink Current ≤ 5mA

Specifications

Input Voltage	100 to 240VAC, 50 / 60Hz Single Phase Power Factor at 100VAC input and max. output : 0.99typ.
Input Current	5.2Amax(360W Model), 11Amax(720W Model), 16Amax(1080W Model) at 100VAC input
Output Control	Local : Constant Voltage Rotary Encoder on the Front Panel (if output power is set beyond max. output volt., output current is lowered automatically.) Constant Current Rotary Encoder on the front Panel (if output power is set beyond max. output current, output volt. is lowered automatically.) (Max. power : 420.2W for 400W Model, 840.5W for 800W Model, 1680W for 1600W Model) Remote : Constant Voltage External Control Voltage 0Vdc to 10Vdc or External Variable Resistor 0Ω to approx. 10kΩ Constant Current External Control Voltage 0Vdc to 10Vdc or External Variable Resistor 0Ω to approx. 10kΩ
Voltage Regulation	For Input : 0.05% of maximum output (to±10% of AC change) For Load : 0.1% of maximum output (to 10% to 100% of load change)
Current Regulation	For Input : 0.05% of maximum output (to±10% of AC change) For Load : 0.1%* of maximum output (to 10% to 100% of load change)
Stability	0.05% / 8H of maximum output voltage
Temp. Coefficient	0.01% / °C of maximum output voltage 0.04% / °C of maximum output current
Output Display	Output Voltage : 4 digits for digital indicator (±0.5%rdg±5 digit, at 23°C±5°C) Output Current : 4 digits for digital indicator (±0.5%rdg±5 digit, at 23°C±5°C)
Monitor Output	Output Voltage Monitor : 10V / max. output voltage Output Current Monitor : 10V / max. output current
Protection	<ul style="list-style-type: none"> ● Overvoltage Protection (OVP) : Cut off the output at the set point ● Overcurrent Protection (OCP) : Cut off the output at the set point Range of set : approx. 5% to 110% of Rating Setting Method : Rotary Encoder on the front Panel or External Control Voltage 0Vdc to 10Vdc ● Over Power Protection (OPP) : Cut off the output at the set point 378W for 360W Model, 756W for 720W Model, 1134W for 1080W Model Reset : Manual return with OUTPUT switch or remote switch ● Over Temp. Protection (OTP) : Cut off the output at abnormal internal heating Reset : Manual return with OUTPUT switch or remote switch(after lowered to normal temp.) ● Input Voltage Drop , Blackout Protection : Cut off the output at input voltage drop Reset (after returned to normal voltage or from blackout) at Power Fail. Protec. (=Re-output Prevent.)...Manual return with OUTPUT switch or remote switch at Power Fail. Protec. (=Re-output Prevent.) canceled...Automatic return ● Remote Sense Connected in Reverse ● Interlock (LD)
Miscellaneous Functions	<ul style="list-style-type: none"> ● Prevention of Miss Operation by Locked Key (A change of normal lock and full lock is possible.) ● Digital Master-Slave Operation (16 units can be hooked in series or parallel.) ● Last set Memory ● Noise Control for Forced Cooling ● Remote Sensing ● ON / OFF with Remote Switch (TTL or External Relay) ● Signal Output for Status (CV, FLT, OUTPUT) ● Delayed Trigger Function : Separated setting for ON Delay / OFF Delay (0.0 to 99.9sec) ● Multi Set Function : 3-memory for voltage or current can be set separately with usual voltage or current.
Transient Response Time	Recovery Time 1ms (at constant voltage operation, time returned to within 10% of set voltage for load change of 70% to 100%)
Operation Temperature	0°C to +50°C
Storage Temperature	-20°C to +70°C
Humidity	20% to 80% RH (no condensation)
Dielectric Strength Voltage	For 1minute at 1000V between the input power supply and the output terminal and between the input power supply and the chassis.
Grounding Withstand Volt.	±250V-DC (Grounding positive or negative terminals are possible)
Accessories	<ul style="list-style-type: none"> ● Instruction Manual (1) ● Cover for remote connector (1) ● Cover for output terminal (1) (refer to P.8 for detail.) ● CO-M cable, 2m length (1) ● AC input cable, 3 cores for single phase type (1)

* The current regulation (for load) of the model whose maximum output current is 0.2%. (for the load change of 10% to 100%)

A lot of Digital Control Functions


Control Functions	<ul style="list-style-type: none"> ● Output ON / OFF set ● Digital Control for 16 units(-LGoB models : 32units) ● Package Control for Multi-hooked Units ● Display of Various Status (Error Display / Status of Output / OVP / OCP / OPP / OTP / ACF / Reverse Connection of sense / Interlock)
Writing Function	Setting for Output Volt. / Output Current Percent Mode (100.00%), * Volt. / Current mode (Max. Rated Value for Volt. / Current)
	Setting for OVP / OCP Percent Mode (100.00%), Volt. / Current mode (Max. Protection Value to Overvoltage / Overcurrent)
Read Function	Measuring for Output Volt. / Output Current Percent Mode (100.00%), * Volt. / Current mode (Max. Rated Value for Volt. / Current)
	Set Values of Output Volt. / Output Current Percent Mode (100.00%), * Volt. / Current mode (Max. Rated Value for Volt. / Current)
	Setting of OVP / OCP Percent Mode (100.00%), Volt. / Current mode (Max. Protection Value to Overvoltage / Overcurrent)

* Minimum value for each model is the same with the minimum displayed digit the indicator on the front panel.

Description of functions (Below image is 360W model.)

Front Panel


360W model only is equipped with FINE switch (12), which enables to jump into neighboring digit at voltage / current setting.

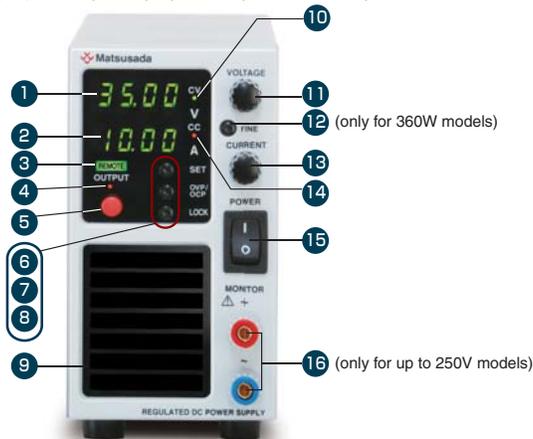

- 1 Display Output Voltage and OVP setting
- 2 Display Output Current and OCP setting
- 3 Display Remote Programming, lighted during remote control of Voltage / Current.
- 4 Display OUTPUT lighted during output.
- 5 ON / OFF Switch for Output, used for ON / OFF for output at remote and reset of Protections.
- 6 Preset Switch for Output
- 7 Setting Switch OVP / OCP
- 8 Setting Switch Key Lock
- 9 Intake hole
- 10 Display Constant Voltage Operation Mode
- 11 Setting Knob for Output Voltage(shared OVP Setting)
- 12 FINE Switch
change over set digit at setting output voltage and current.
- 13 Setting Knob for Output Current(shared OCP Setting)
- 14 Display Constant Current Operation Mode
- 15 ON / OFF Power Switch
it has priority over all actions for safety.
- 16 Terminals for a Monitor(up to 20A)
- 17 Ventilation Hole
- 18 Digital Interface
used for master-slave and delay trigger too.
- 19 Connector for remote control (TB1)
- 20 Grounding terminal

Rear Panel


[up to 250V models]

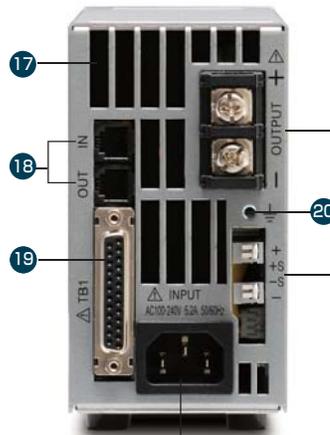

Output Terminal

- 360W Model : Terminal board
- 720W, 1080W Model : Busbar

Remote Sensing



Prevent to degrade stability due to volt. drop (Vo-VL) by resistance(R) of output wiring or contact resistance. (up to max. 0.5V)

[more than 350V models]



Input Terminal

- 360W, 720W Model : AC inlet
- 1080W Model : Terminal board

Output Terminal

Slueless terminal board

Specifications of cables to use

Appropriate wire	Single wire : 1.2mm in diameter (AWG16) Twisted wire : 1.25mm ² (AWG16) Diameter of strand : more than 0.18mm
Usable wire	Single wire : 0.4mm to 1.2mm (AWG26 to 16) Twisted wire : 0.3 to 1.25mm ² (AWG22 to 16) Diameter of strand : more than 0.18mm
Standard length of the part which peeled coating	11mm
Suitable tool for pulling / connecting the wire	Flat-blade screwdriver (Axial diameter : 3mm, the width of the edge of a blade : 2.6mm)

Caution about the diameter or a cross-section of wire mentioned above
When the dimensions that are prescribed by AWG do not conform to the value of cross-section, please apply the latter.

The models whose dimensions are from B to F in P.9 have the cover for output terminal.

B, D, F, models ▶




C, E, models ▶



Dimensions inch(mm)


A 360W Models ①

Weight : 3kg approx.

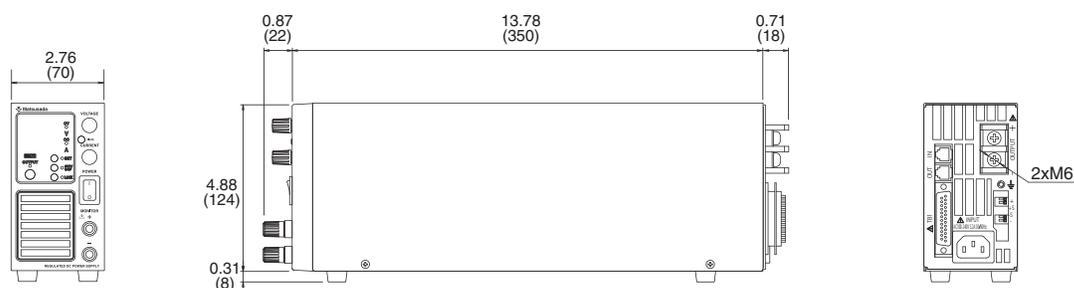


B 360W Models ②

Weight : 3kg approx.

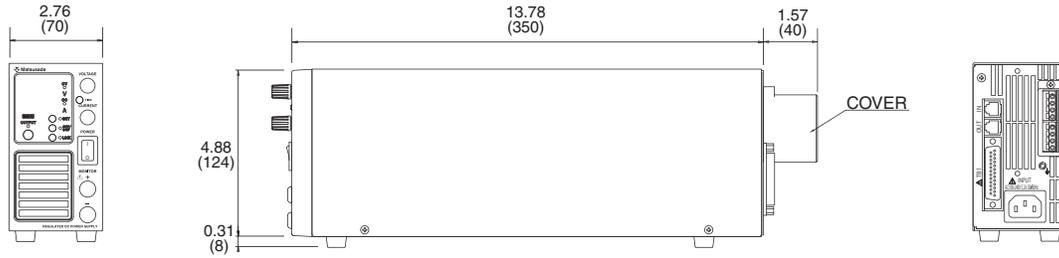


C 720W Models ①

Weight : 5kg approx.

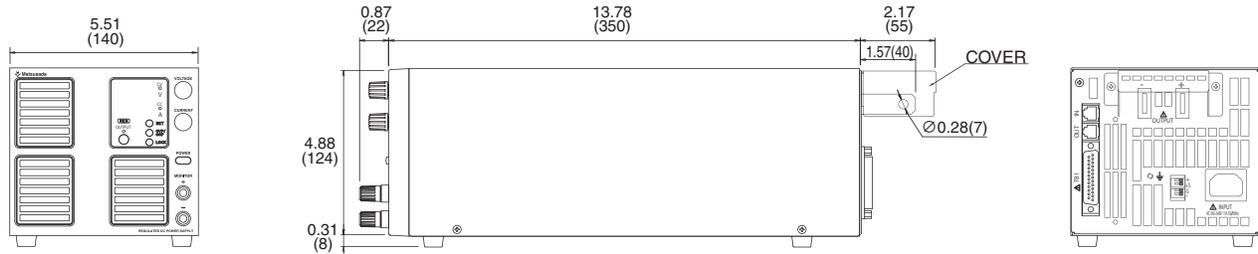


D 720W Models ②

Weight : 5kg approx.

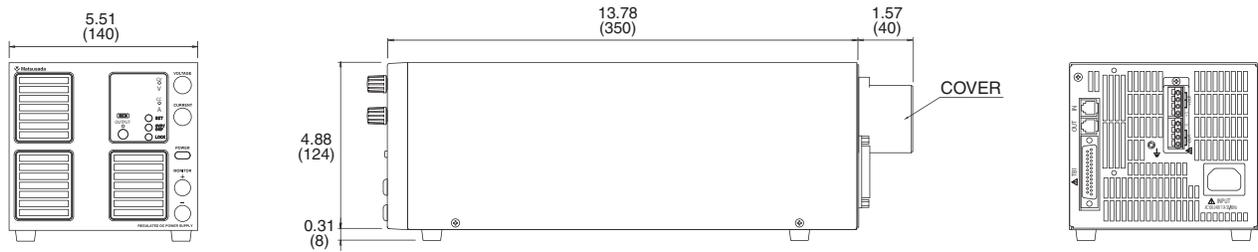


E 1080W Models ①

Weight : 8kg approx.

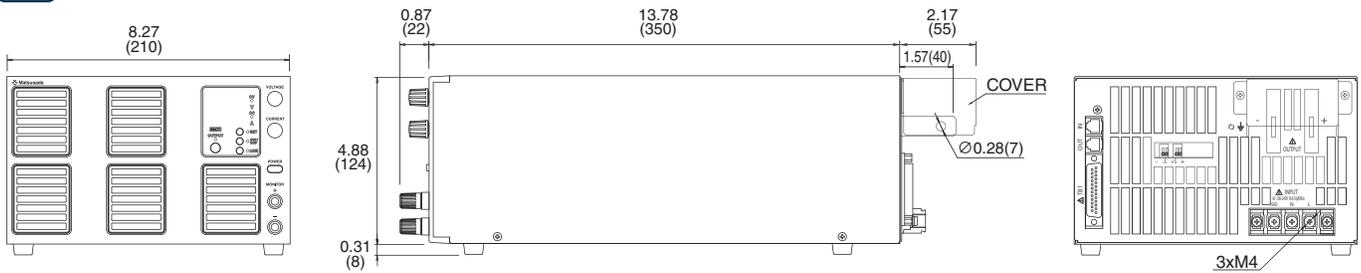

F 1080W Models ②

Weight : 8kg approx.

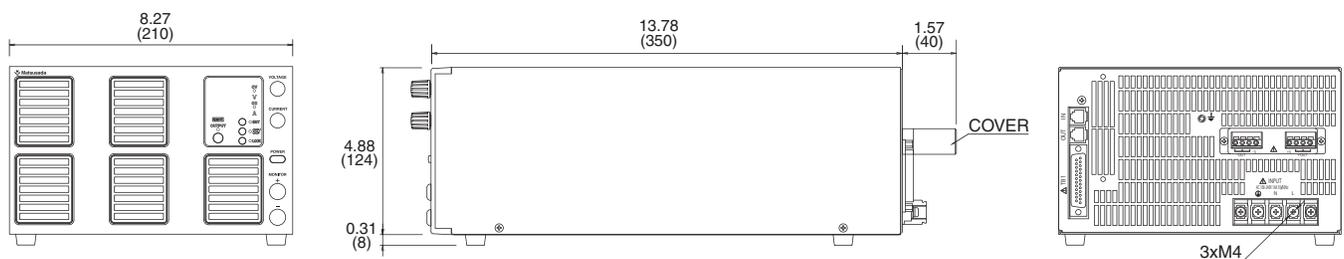


Options

-L Gob : Optical interface Board ^{*1}

- L Gob Optical Interface board + Optical cable 2m
- L Gob(Fc5) Optical Interface board + Optical cable 5m
- L Gob(Fc10) Optical Interface board + Optical cable 10m
- L Gob(Fc20) Optical Interface board + Optical cable 20m
- L Gob(Fc40) Optical Interface board + Optical cable 40m


Insulation control is made with optical communication. As perfect insulation is made by optical fiber it is able to forestall miss operation as transient phenomenon caused by surge, dielectric thunder or foreign noise, etc.

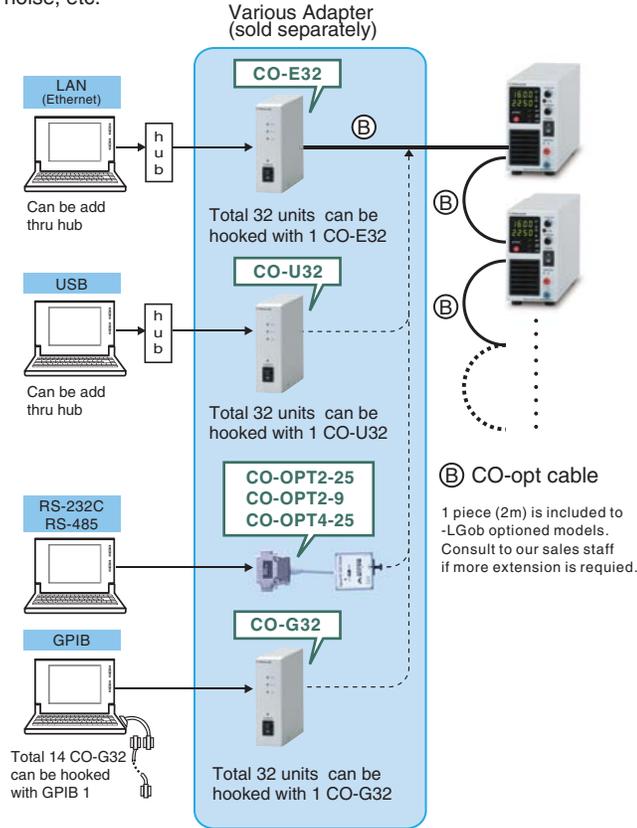

- ★ When using them under the following conditions, always select -L Gob.
 - Noisy environment as in a factory. (Ex. A motor or a coil is used near to load or power supply)
 - Used in high voltage floating. (250V and higher)
 - Our power supply and controller (PC or PLC) can not be installed within 2m.
- ★ If you use plural TB in optical communication, please use them according to the following ways.
 - Connecting all TB which have optical I/F board serially
 - Connecting all TB serially ; the first TB is optical I/F board type, and all TB after the 2nd are standard I/F board type.

-LU s1 : USB Interface Board ^{*1}

Digital control is enabled through USB.




- If you control plural TB via USB, please use them according to one of the following ways.
- Utilizing a USB hub between a PC and TB
 - Connecting all TB which have optical I/F board serially
 - Connecting all TB serially ; the first TB is optical I/F board type, and all TB after the 2nd are standard I/F board type.

OS for Personal Computers : Microsoft Windows Xp / Vista / 7 / 8
Both of 32 bits and 64 bits are applicable
(Microsoft and Windows are registered trademark of Microsoft Corp. in USA and other.)

-LEt : LAN(Ethernet) Interface Board ^{*1}

Digital control is enabled through LAN (Ethernet).



- If you control plural TB via Ethernet, please use them according to one of the following ways.
- Utilizing a hub between a PC and TB
 - Connecting all TB which have optical I/F board serially
 - Connecting all TB serially ; the first TB is optical I/F board type, and all TB after the 2nd are standard I/F board type.

-L(Mc0.5), -L(Mc0.15) : Change Communication Cable Length

Length of CO-M cable is to be 0.5m and 0.15m, respectively.
(only either one is selectable.)

-LZ : Handle for carrying

The top panel has a handle for easy carrying, so height of TB becomes higher.
[Added height] 360W models : 0.31" (8mm), 720W models : 0.43" (11mm), 1080W models : 0.39" (10mm)

-LIc : Output current accumulation function ^{*2}

Accumulate the output current and display its value (up to +9999.999Ah). The accumulated value is stored even when output is off. Because, the accumulated value which stop the output can be set preliminarily, it is very suitable to the application such as controlling plating solution.

- *1 : These options can not be selected together. Please refer to the catalogue of digital controller for power supplies "CO series" for the detail of digital interface function.
- *2 : Please consider the location of usage. High humidity environment can be the cause of failure and corrosion.

How to Order Please suffix above optional codes on the tail of Model number.
[Example] TB35V36A360W-L Gob(Fc10)lcZ, TB160V22A1080W-LEt(Mc0.5)Z

TB series are also available in such a use.

[For simulation of solar cells] *This is customization.
It is possible to test or inspect micro inverter because TB can do simplified simulation of I-V characteristic of the solar panel. If you want to talk with us for details, please tell our sales office "the model number of solar cell which you want to simulate" and "specifications of micro inverter for testing or inspection".

AC Input Cable

Contact nearby sales office in case of using TB series in European countries.

CABLE TYPE 1 (Standard Attach. of 360W Models)	CABLE TYPE 8 (Standard Attach. of 720W Models)	CABLE TYPE 3 (Applicable 360W, 720W Models)	CABLE TYPE 4 (Applicable 360W, 720W Models)	CABLE TYPE 5 (Standard Attach. of 1080W Models)
125V / 10A	125V / 15A	250V / 10A	250V / 10A	250V / 25A


Please use the AC input cable suitable for usage environment and the area. CABLE TYPE3 and 4 correspond to CE marking.

Example for Applied Actions

With TB series of the same model, output voltage and current can be increased by connecting power supplies in series or parallel. Control must be set on each individual unit. Do not connect together COMMON of 2 units or more as the COMMON of connector for external input and output control (TB1) is connected with output.


Series Operation

Sum of output is up to 250V. It is impossible to series operation for one exceeds 250V in output volt. Output current is of the min. one of power supply among them.




Parallel Operation

Make all setting voltage same value. Output current is sum of each current. In addition, make OVP level for all power supplies maximum to prevent damage.



Split Operation

Possible to output on positive(+) or negative (-).



Technical Notes

Connection and Application Operation

■ Connection of Loads


- Connect short with leads of sufficient thickness.
- Use PVC wire (105°C) which endure enough to applied voltage. Consideration of ampacity and limitation for lead wire length by sensing (0.5V) requires for wiring to the load.

AWG	mm ²	Max. current(A)
18	1.1	2
16	1.3	7
14	2.1	11
12	3.3	18
10	5.3	23
8	8.4	39
6	13	67
4	21	106
2	33	170
1	42	209
1/0	53	270
2/0	67	330
3/0	85	350


In case of 350A and higher, use multi-cables or a copper bar.

■ Paralleling of Loads

 Good Connection



 Wrong Connection




Conception of Specification

Unless other wise specified, specifications on this catalogue are of values at max. rated output (full scale*) after 2 hours warming-up.

Applied range of specifications

Ripple, Stability, Variations and Temp. coefficient are applied "F.S x Catalogue Value" and Linearity of output, Linearity of monitor, Linearity of indications are applied "F.S x value of ±0.5% (*)" at the applied range of 10% to 100% of maximum rated output.



Ripple

Indication is in rms including high-frequency noise.

Preset

Preset value does not indicate exactly actual output state. If require exact setting, set voltage value by making actually output in no-load.

For current, set current value by making gradually current rise in shorted terminals of output.

► Please Read Surely

When Select DC power Supplies

- Products on this catalogue are manufactured on consideration for safety fully as direct current power supplies, but please observe the Instruction Manual for operation and earth always grounding terminals for safety.
- Products on this catalogue are manufactured under the premise that applied on ground potential or in the range of series operation. Please consult our sales staff when use them on high potential floating.
- Products on this catalogue are manufactured on consideration for protection against electric discharge from loads fully, but when use them for some of continuous discharge like as spattering or for special withstand voltage test, please consult our sales staff in advance.
- We recommend contact our sales staff and inform them your requirement prior to your selection in order to secure safety as power supply equipment and make your best fit selection.

