



8W High Power Amplifier 1-22GHz NF: 5dB



- Short Haul / High Capacity Links
- High Power Amplifier
- Military & Space
- Noise Figure: 5 dB
- Psat: + 39dBm
- Gain: 42 dB
- Supply Voltage: +24V
- 50 Ohm Matched Input/output

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	1		10	11		22	GHz
Gain	37	44	48	37	41	45	dB
Gain Flatness		±5			±5		dB
Gain Variation Over Temperature(-45 ~ +85)		±3			±3		dB
Noise Figure		5			5		dB
Input Return Loss		15			15		dB
Output Return Loss		10			12		dB
Output Power for 1 dB Compression (P1dB) *	33	34	36	32	33	36	dBm
Output Power for 3 dB Compression (P3dB) *	36	37	38	34	36	38	dBm
Saturated Output Power (Psat) *		39			38		dBm
Output Third Order Intercept (IP3)		42			42		dBm
Supply Current older model (VDC=+24V)		2500	2800		2500	2800	mA
Supply Current New version (VDC=+36V)		1600	2000		1600	2000	mA
Isolation S12 (Isolation data is wrong, should minus attenuator value)	105	106	107	99	100	102	dB
Input Max Power (no damage)			+2			+2	dBm
Older model Weight (no heatsink)	280						g
Newer model Weight (no heatsink)	1285						g
Impedance	50						Ohms
Input /Output Connector	SMA-Female						
Finishing	Older model: Gold 40 micron thickness						
	Newer model: Nickel 200 micron thickness						
Material	Aluminum/copper						
Package Sealing	Epoxy Sealing (Standard)						
	Hermetically Seal (Option with extra charge)						

* P1dB, P3dB and Psat power testing signal: 200µs pulse width with 10% duty cycle.

* For average CW power testing, a 5dB back off from Psat is required unless water/oil cooling system is applied.

8W High Power Ultra Wide Band Power Amplifier 1-22GHz



Absolute Maximum Ratings	
Supply Voltage	+28 VDC
New model supply voltage	+60 VDC
RF Input Power (RFIN)	+2dBm
Storage Temperature(C°)	-50 to +125

Note: Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves

Biasing Up Procedure	
Step 1	Connect input and output with 50 Ohm source/load. (in band VSWR<1.9:1 or >10dB return loss)
Step 2	Connect Ground Pin
Step 4	Connect +24 VDC (+36 new model)
Power OFF Procedure	
Step 2	Turn Off +24 VDC (+36 new model)
Step 3	Remove RF Connection
Step 4	Remove Ground

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF-Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each of RF-Lambda amplifiers will go through power and temperature stress testing.

Due to fragile of the die, IC or MMIC, those are not covered by warranty. Any damage to those will NOT be free to repair.


Environment specifications	
Operational Temperature (C°)	-45 ~ +85(Case Temperature must be less than 85C all time)
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35C, 95%RH at 40°C
Shock	20G for 11msc half sin wave, 3 axis both directions

Note: The operating temperature for the unit is specified at the package base. It is the user's responsibility to ensure the part is in an environment capable of maintaining the temperature within the specified limits


Ordering Information	
Part No	Description
RFLUPA01G22GA	1GHz~22GHz Power Amplifier




Gain

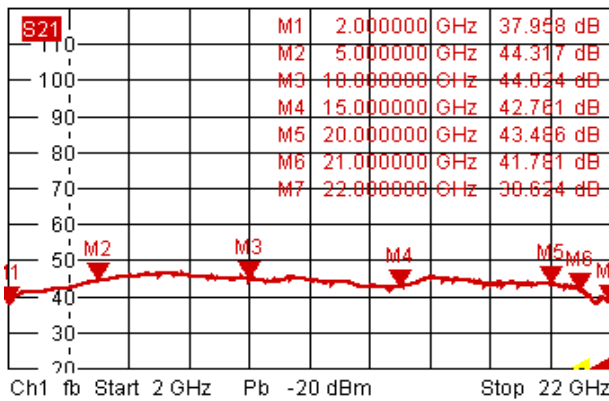


Input Return Loss

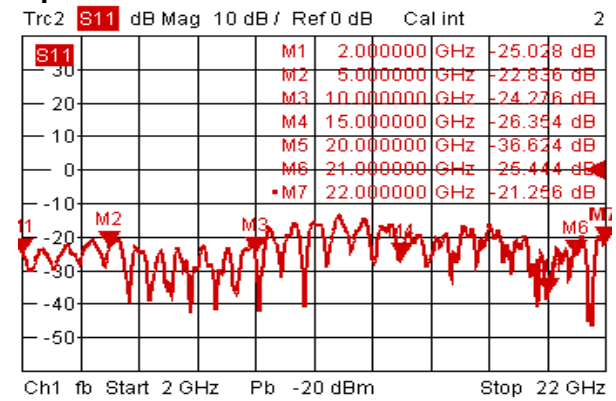

Output Return Loss

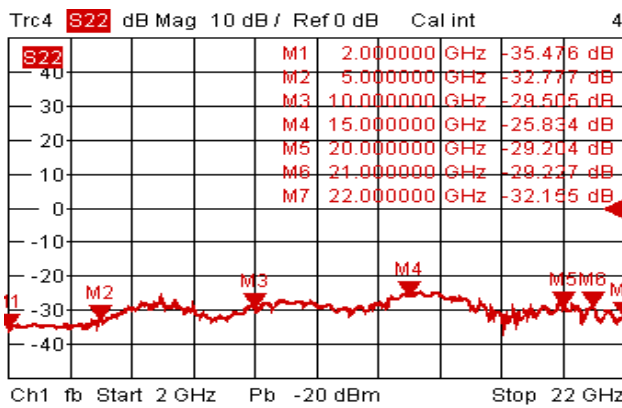


Isolation

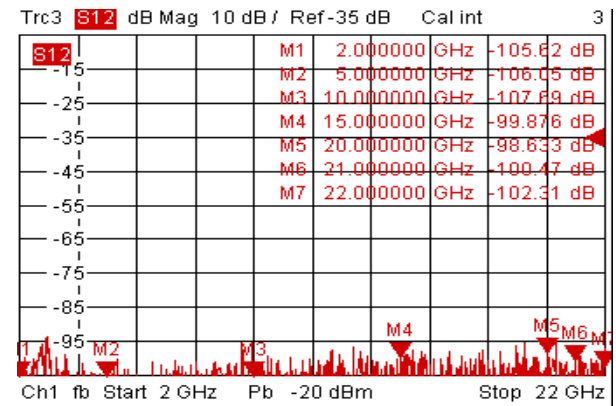


Note: Input/output return loss measurements include attenuators to protect equipment




Gain vs. output power

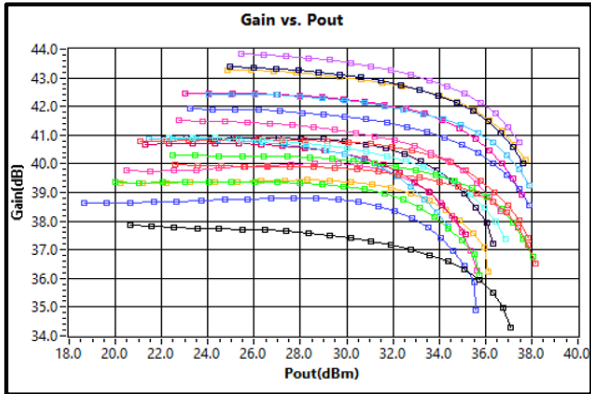


Output Third Order Intercept (IP3)

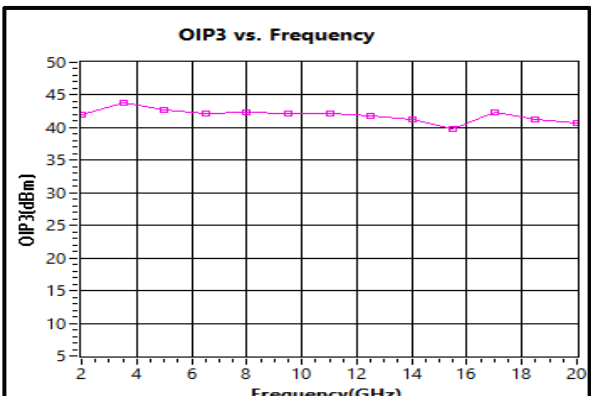


2nd Harmonic Wave output Power

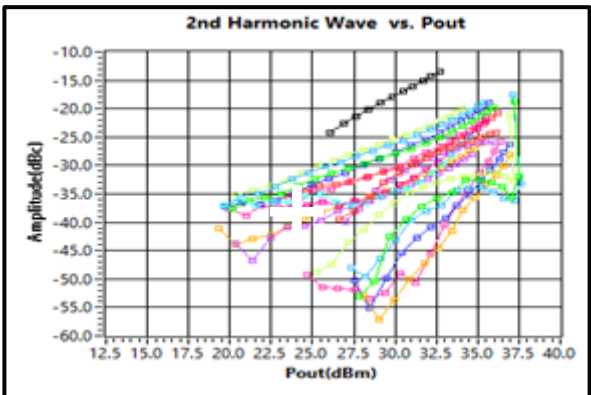


4th Harmonic Wave output Power

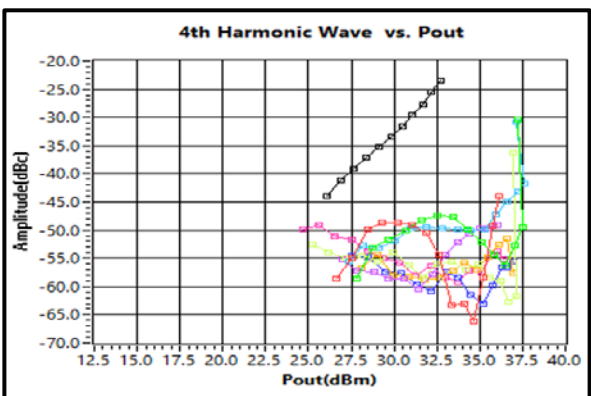



P1dB vs. Frequency

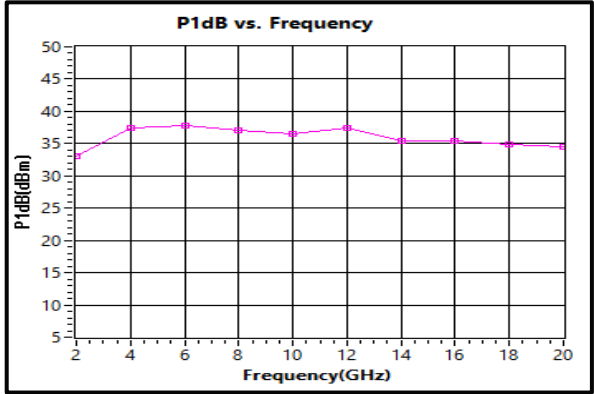

P3dB vs. Frequency

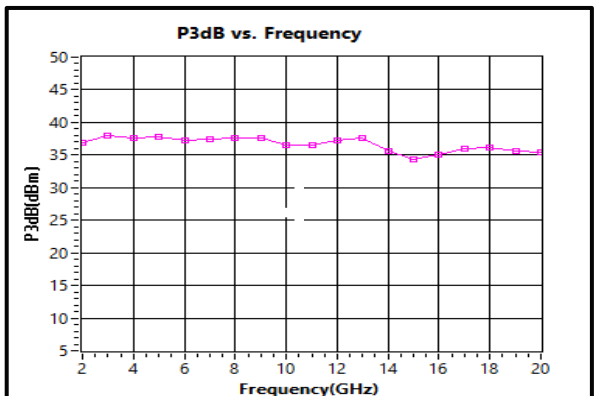



3rd Harmonic Wave output Power

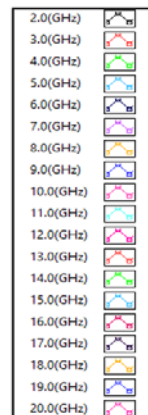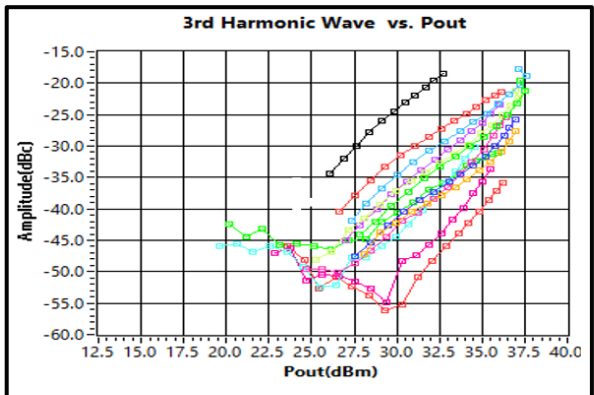


8W High Power Ultra Wide Band Power Amplifier 1-22GHz




IM3 vs. Output power

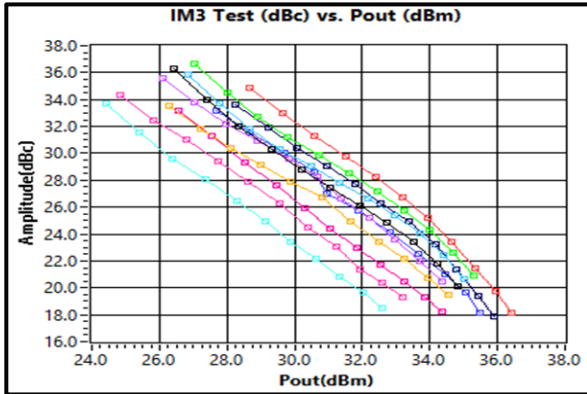


Left IM3

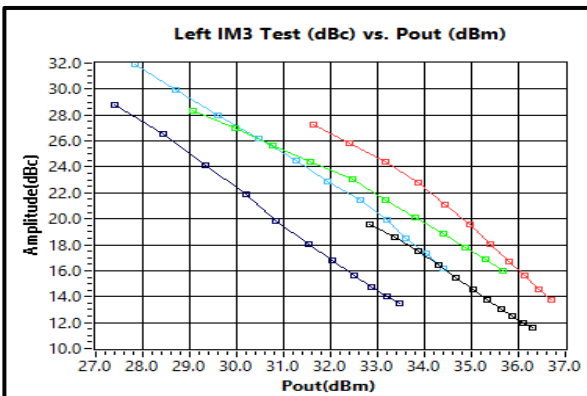



Right IM3

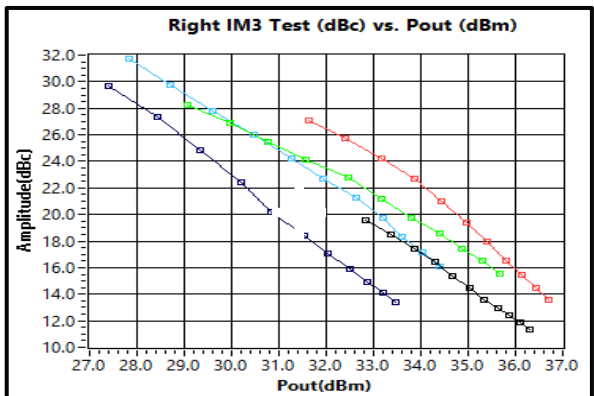

Memory Effect

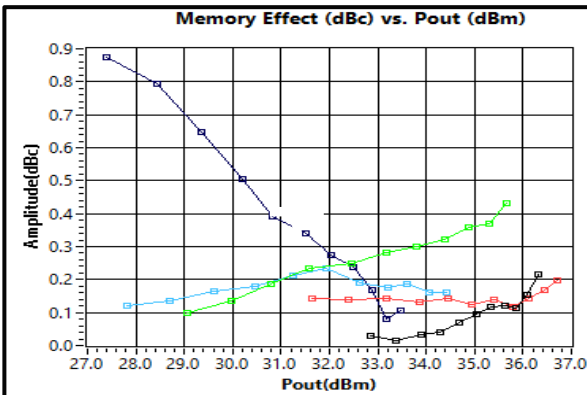

Current vs. Output power

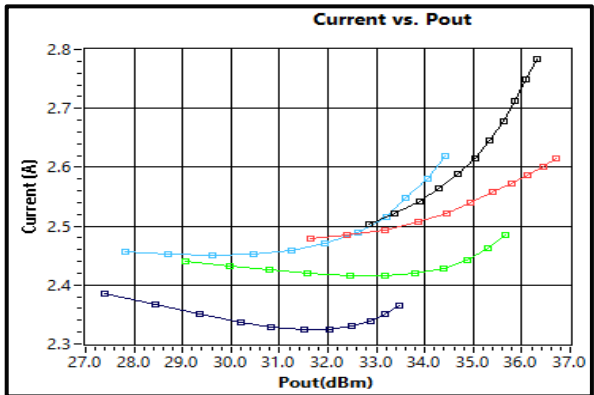

8W High Power Ultra Wide Band Power Amplifier 1-22GHz




RF-LAMBDA

The power beyond expectations

RFLUPA01G22GA

8W High Power Ultra Wide Band Power Amplifier 1-22GHz


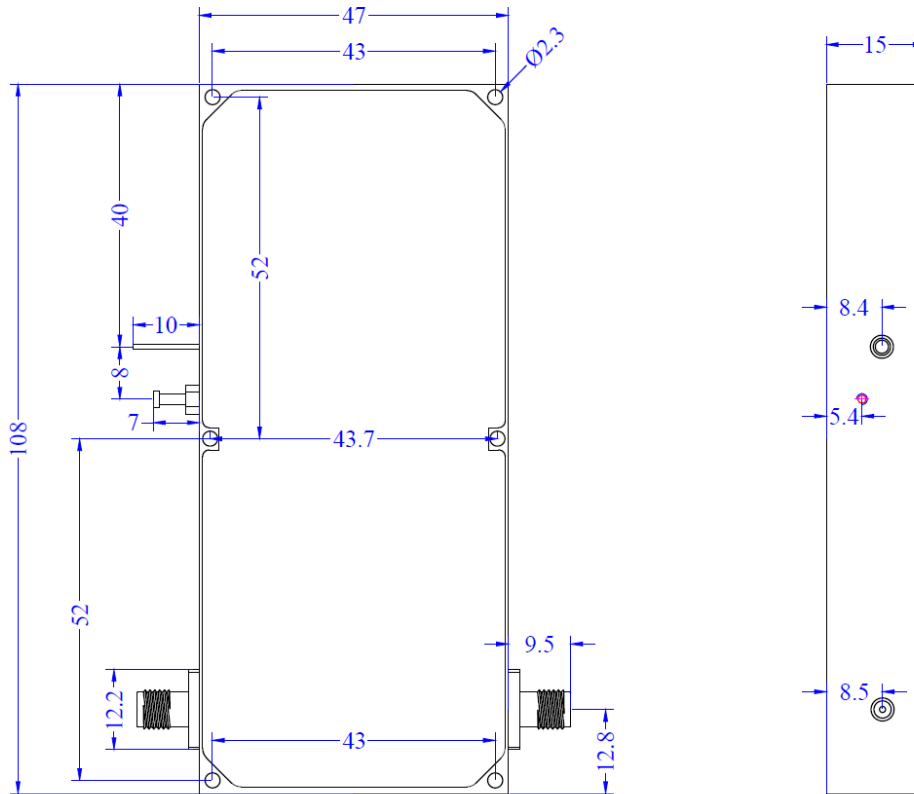


Heat Sink and cooling fan required during operation





Heatsink

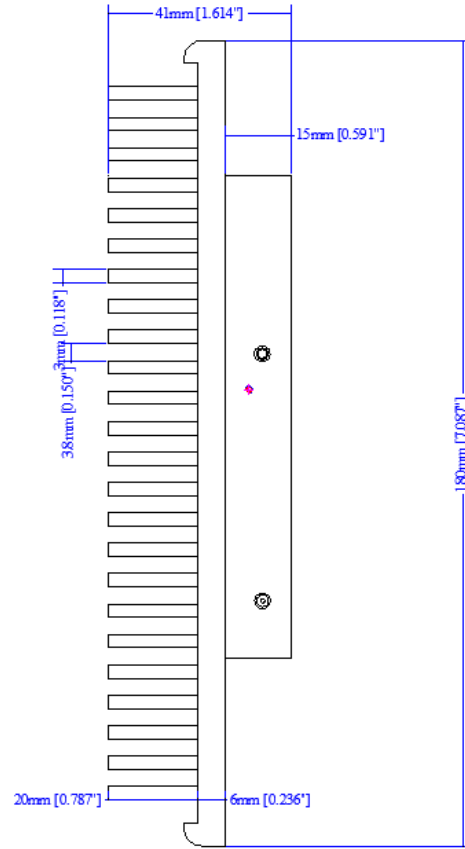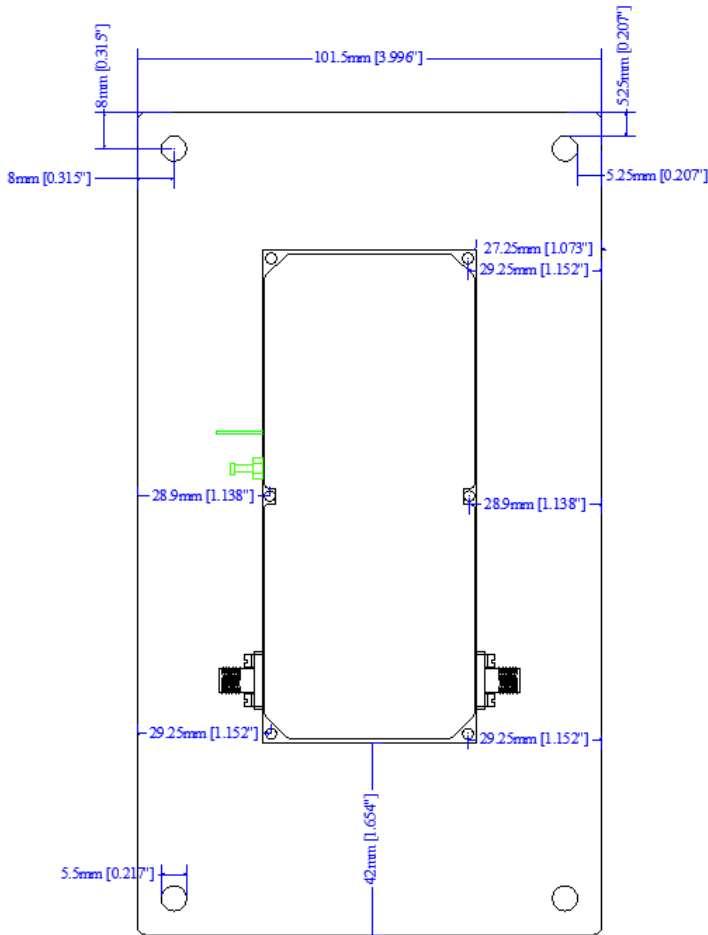

*****Heat Sink and cooling fan required during operation*****



Important Notice


The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.



New Model

Dimensions in mm

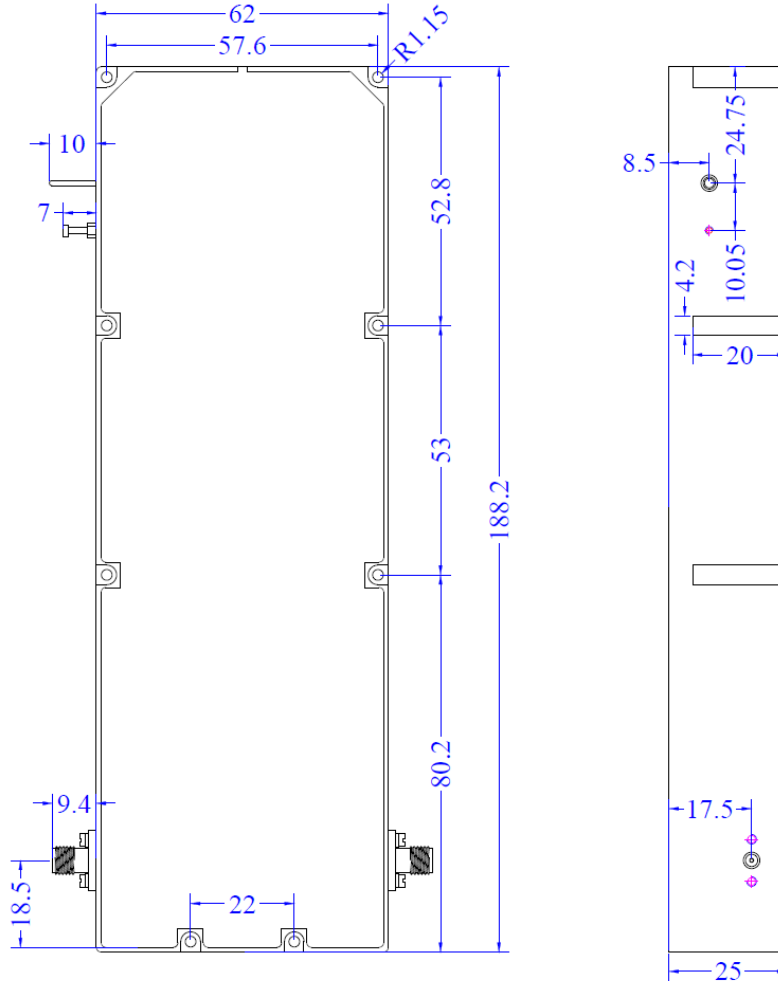

Heat Sink and cooling fan required during operation



8W High Power Ultra Wide Band Power Amplifier 1-22GHz