**New Product** 

#### SURFACE MOUNT SHIELDED POWER INDUCTOR SERIES LH3215

#### FEATURES

- RoHS compliant
- ${\it Square footprint}$
- Low profile
- Well suited for use in mobile devices, LCD panels and MP3 players

## **ELECTRICAL SPECIFICATIONS**

- Inductance range	1.0uH to 22uH
-Testfrequency	100kHz@0.1Vrms test level
-Test equipment	Quadtech 1750 LCR Meter

## **PHYSICAL SPECIFICATIONS**

-Operating temp.	-40°C to	o +105°C
-Core	Ferrite	
- Packaging	T & R	2000 pieces per reel
- Tape & reel spec.	Tape	8 mm embossed carrier
	Reel	178 mm paper reel 🛛 🛏

#### Tol DCR Rated Saturation Lo Part Number (uH)% <u>+</u> (ohms) Current (A) Current (A) (Note 2) max (Note 1) LH3215-1R0Y 1.0 30 0.042 3.00 2.50 LH3215-2R2M 2.2 20 0.072 2.35 1.80 LH3215-3R3M 3.3 20 0.096 1.80 1.404.7LH3215-4R7M 20 0.144 1.30 1.02 LH3215-6R8M 6.8 20 0.192 1.20 0.90 10.0 0.276 LH3215-100M 20 1.00 0.70 LH3215-150M 15.0 20 0.432 0.90 0.56 LH3215-220M 22.0 20 0.624 0.70 0.47


С

മ

**SPECIFICATIONS** 

# **Dimensions in millimeters**

Length A	3.2 <u>+</u> 0.2
Width B	3.0 <u>+</u> 0.2
Height C	1.5 max
Terminal length D	$0.4 \pm 0.1$
Terminal width E	$2.2 \pm 0.1$




## Suggested Land Pattern

G = 2.0 mmH = 3.0 mm L = 3.4 mm


1. Based on  $\Delta T$  of approximately 40°C.

2. Based on initial L drops 30% typical.


All test data based on  $25^{\circ}$ C ambient. Part temperature (ambient+temp rise) not to exceed  $105^{\circ}$ C under worst case operating conditions. Circuit design, components, PCB trace size and thickness, airflow and other cooling provisions all effect the part temperature. Verify part temperature in end application.




Suggested Reflow Profile

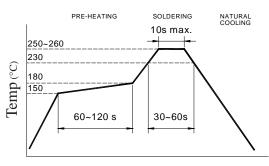


Time (seconds)

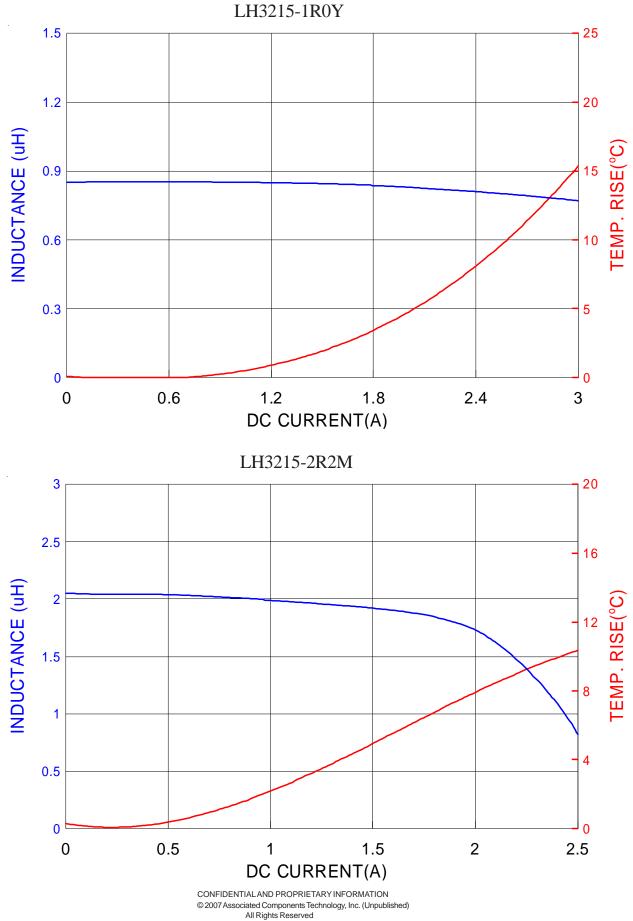


All Rights Reserved This document contains confidential and proprietary information of Associated Components Technology, Inc. and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Associated Components Technology, Inc is strictly forbidden. Date of Disclosure is Jan 15, 2007.

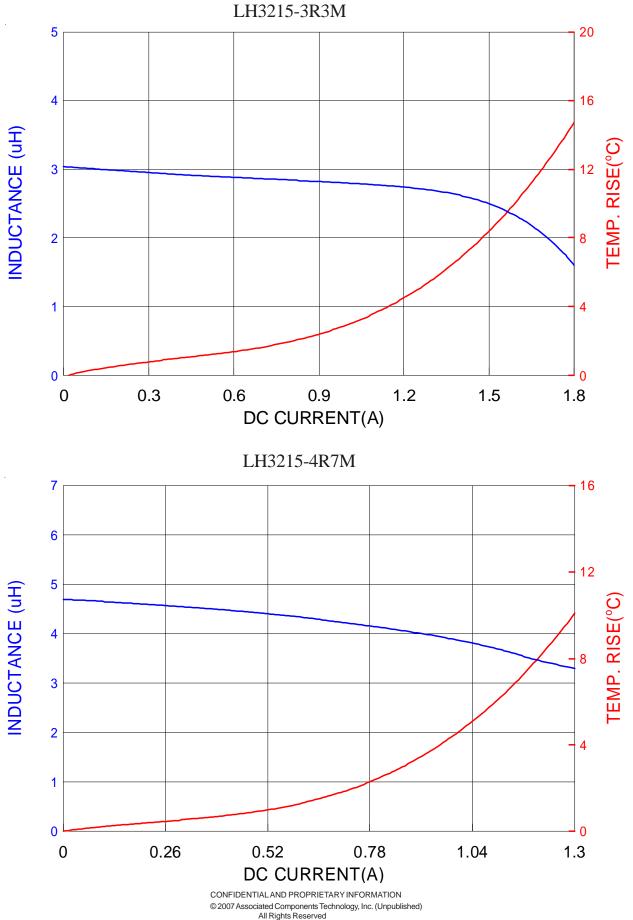

This document contains confidential and proprietary information of Associated Components Technology, Inc. and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Associated Components Technology, Inc. and 15, 2007.

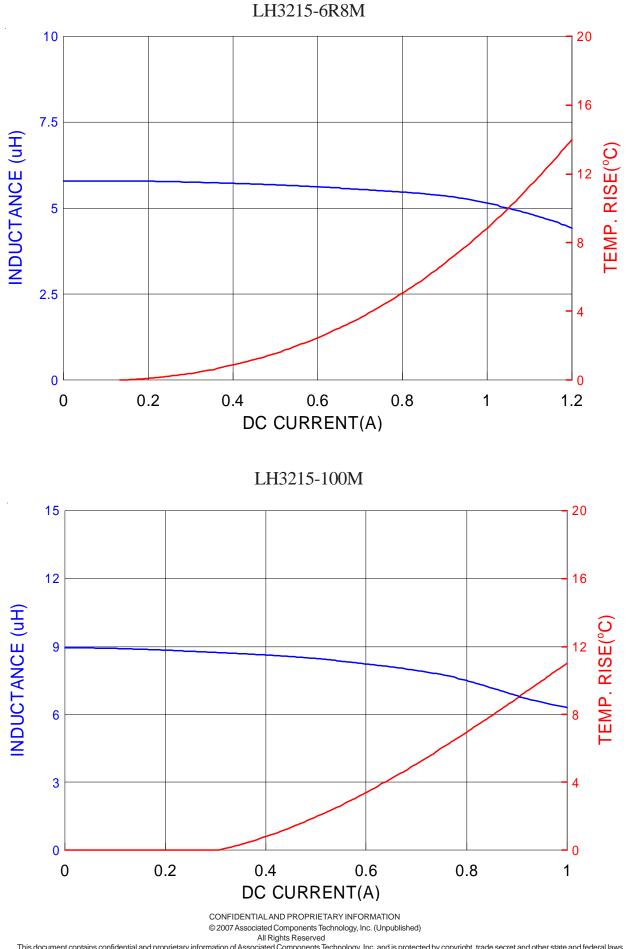

All Rights Reserved This document contains confidential and proprietary information of Associated Components Technology, Inc. and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Associated Components Technology, Inc is strictly forbidden. Date of Disclosure is Jan 15, 2007.

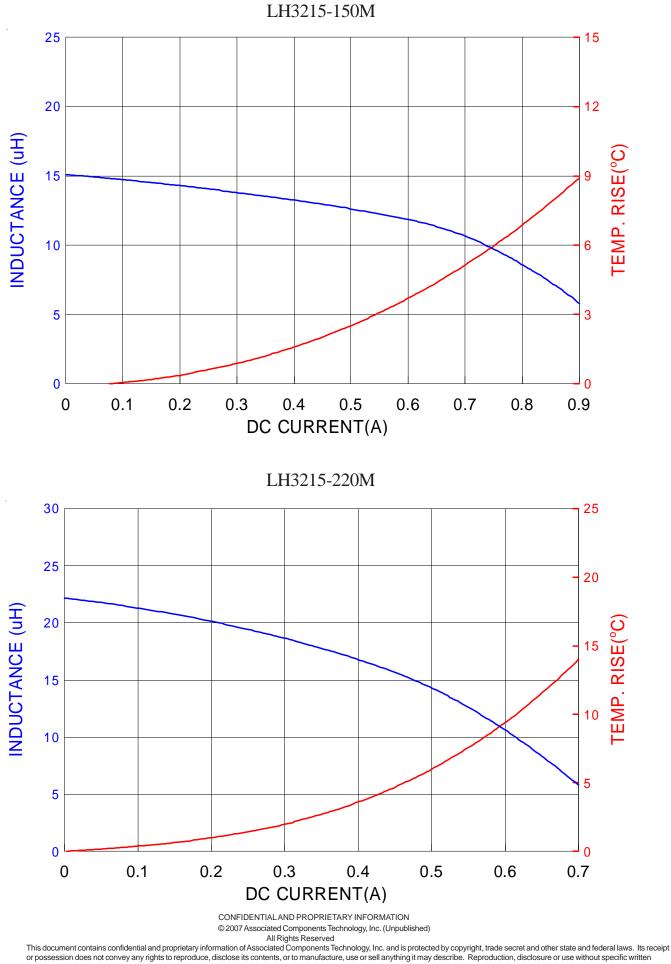

authorization of Associated Components Technology, Inc is strictly forbidden. Date of Disclosure is Jan 15, 2007.