

**SURFACE MOUNT MOLDED TYPE
POWER INDUCTOR SERIES MTPI0604**

FEATURES

- Low profile
- High current handling capacity
- Low noise and low DCR
- High reliability and efficiency
- RoHS compliant and Halogen free

ELECTRICAL SPECIFICATIONS

- Inductance range 0.12uH to 10.0uH
- Test frequency 100 KHz with test level 1.0 V
- Test equipment Quadtech 1910 L analyzer
- Rated current range 7.0 to 64.0 Amps
- Tolerance ± 20% (M) and ± 30% (N)
- Rated current Refer to notes below

PHYSICAL SPECIFICATIONS

- Operating temp. -40°C to +125°C
- Core Mixed material
- Terminal construction Solder plating
- Packaging Box 2000 pieces per inner box
 T & R 1000 pieces per reel
- Tape & reel spec. Tape 16 mm embossed carrier
 Reel 330 mm reel

SPECIFICATIONS


Part Number	L (μH)	Tol % ±	DCR max (mΩ)	Rated Current (A)	
				I _{rms} ⁽¹⁾	I _{sat} ⁽²⁾
MTPI0604-R12N	0.12	30	1.0	32.0	64.0
MTPI0604-R15N	0.15	30	1.2	30.0	55.0
MTPI0604-R47M	0.47	20	3.4	23.0	28.0
MTPI0604-R68M	0.68	20	4.5	16.0	24.0
MTPI0604-1R0M	1.00	20	8.0	14.0	22.0
MTPI0604-1R5M	1.50	20	12.0	12.0	20.0
MTPI0604-2R2M	2.20	20	14.0	9.0	14.0
MTPI0604-3R3M	3.30	20	27.0	8.0	12.0
MTPI0604-4R7M	4.70	20	32.5	6.0	11.0
MTPI0604-5R6M	5.60	20	38.0	5.0	9.0
MTPI0604-6R8M	6.80	20	50.0	4.5	8.5
MTPI0604-8R2M	8.20	20	64.0	4.5	8.0
MTPI0604-100M	10.0	20	72.0	4.0	7.0

DIMENSIONS IN MILLIMETERS

- Length A 7.3 ± 0.3
- Width B 6.6 ± 0.3
- Height C 3.8 ± 0.2
- Terminal width D 1.8 ± 0.3
- Terminal length E 3.0 ± 0.3

SUGGESTED LAND PATTERN

- L = 8.4 mm ref.
- G = 2.5 mm ref.
- H = 3.5 mm ref.

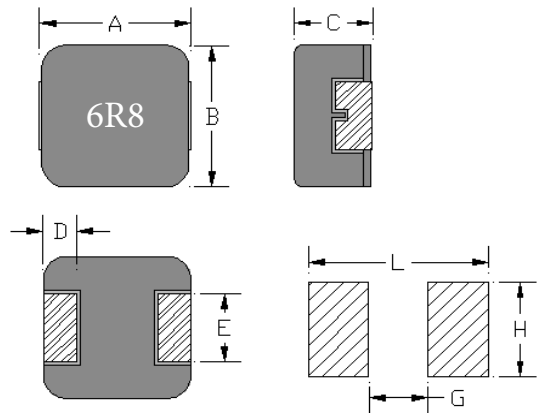

Notes:

- (1) Based on ΔT approximately 40°C rise
- (2) L drops 20% typical

All test data based on 25°C ambient
 Part temperature (ambient + temperature rise) must not exceed 125°C under worst case operating conditions.
 Circuit design, components, PCB trace size, airflow and other cooling provisions all effect the part temperature.