


2 x 2 Connection Series

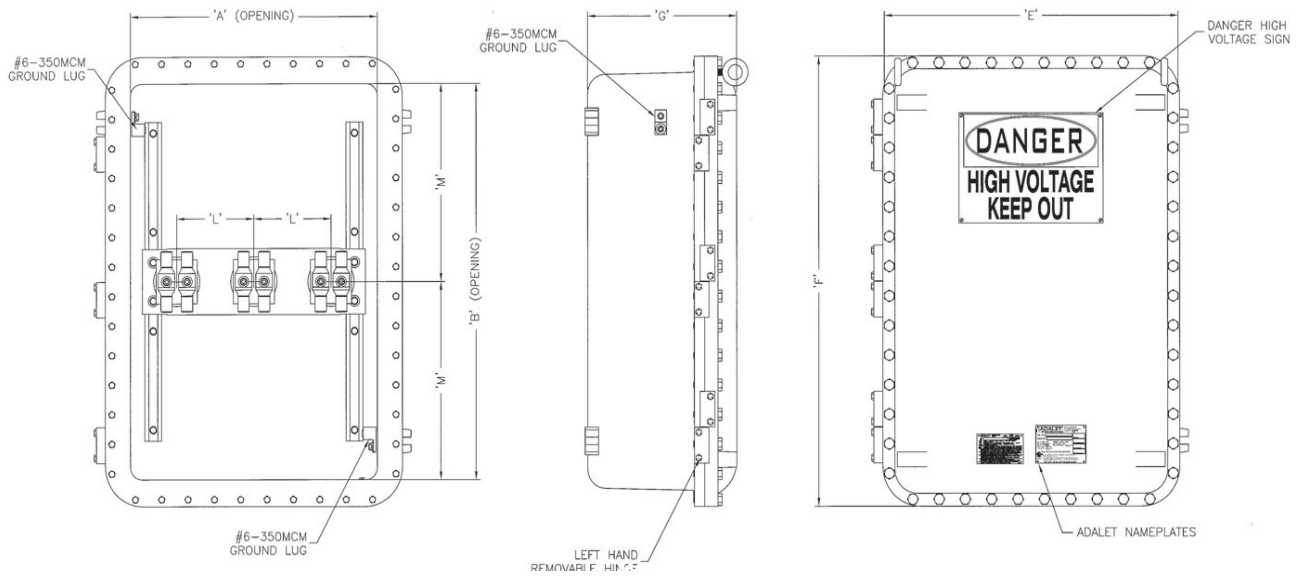

ENCLOSURE	H	W	D	MCM	mm ²	AMPERAGE	
						Phase	Conductor
XHVX-182408	18.00	24.00	8.00	350	185	630	315
XHVX-183008	18.00	30.00	8.00	400	240	800	400
XHVX-183608	18.00	36.00	8.00	400	240	800	400
XHVX-182410	18.00	24.00	10.00	350	185	630	315
XHVX-183610	18.00	36.00	10.00	400	240	800	400
XHVX-242408	24.00	24.00	8.00	350	185	630	315
XHVX-243008	24.00	30.00	8.00	400	240	800	400
XHVX-243608	24.00	36.00	8.00	400	240	800	400
XHVX-242410	24.00	24.00	10.00	350	185	630	315
XHVX-243610	24.00	36.00	10.00	500	300	1,000	500

mm ²	MIN CONDUCTOR SIZE		AMPERAGE
	AWG/MCM	MAX	
10	8	50	
16	6	80	
25	4	100	
35	2	125	
50	1/0	160	
70	2/0	200	
95	3/0	225	
150	250	250	
185	350	315	
240	400	400	
300	500	500	

EXPLOSIONPROOF XCE/XJF Enclosures