


XCE 1414 COVER

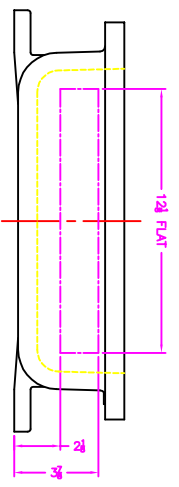

- NOTES:
- COVER DRILLING ALLOWABLE IN XCE ONLY
 - MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/4"
 - MINIMUM SPACING BETWEEN #1-14 NPSM OPERATOR CENTERS IS 3 FOR THIS ENCLOSURE.
 - MAXIMUM NUMBER OF OPERATORS IS 16.
 - DIMENSION FROM CENTER LINE OF COVER FOR OPERATORS.
 - DIMENSION FROM CENTER LINE AND BACK OF MTG. LUG FOR CONDUIT.
 - FOR MTG. ENCLOSURE USE # BOLT.

		MODIFIED XCE/XUF 141404 ENCLOSURE FOR	
TUMBLAUST XCE/XUF 141404	DDH 11-13-01 1-3 D	10F1	10F1