
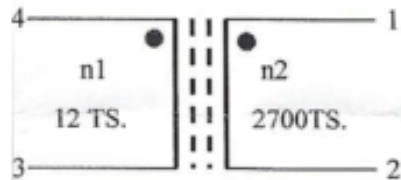


UNIT:m/m

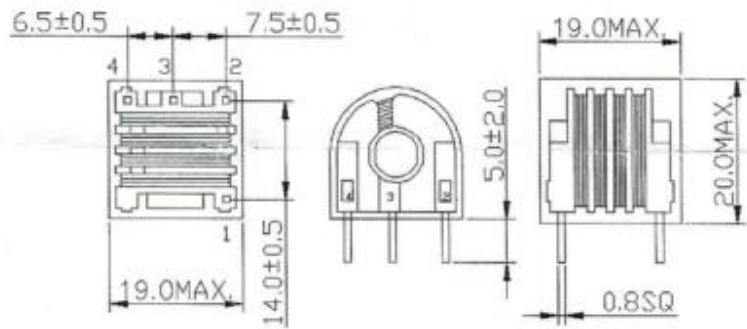

Marking: JC90086
HVT wwyy

Specification		Condition
Ln1 Pri (P4-P3)	4.0uH +/- %	1.0kHz
Ln2 Sec (P1-P2)	170mH +/- %	
DCR Pri (P4-P3)	57mΩ	Max
DCR Sec (P1-P2)	765Ω	Max
Withstand Voltage	3kV	
Ratio		
Operating Temp	-40 to +125 Deg C	
Breakdown	7kV/mm min	
Materials	Material	
Case	Factory Specification	
Bobbin	Factory Specification	
Core	Factory Specification	
Wire	Factory Specification	
Epoxy	5002A & 5002B	
Flammability	UL94V-0	
Marking	+ Production Code ww-yy	

Proprietary and Confidential The information contained in this drawing is the sole property of AIT Components Ltd. Any reproduction in whole or part without the written permission of AIT Components Ltd. is strictly prohibited	AIT Components Ltd. www.aitcomponents.com			
	Drawn	GKR	Title JC90086	
	Checked	th		
	Unless otherwise specified dimensions are in millimetres		Issue A	Rev 01
	Do Not Scale Drawing			