



# AKRON

BRASS COMPANY

An ISO 9001 Registered Company

## THE FIRST TRULY MULTI-PURPOSE NOZZLES

# SABERJET™

### MULTIPLE APPLICATIONS:

- Interior
  - Exterior
  - High Rise
  - CAFS
  - Foam
  - Direct Attack
  - Indirect Attack
  - Cooling
  - Penetration
  - Protection
  - Ventilation
- SaberJet does them all.



### SOLID BORE

- Solid Bore Reach and Penetration
- Low 50PSI Inlet Pressure
- High Volume Flow  $\frac{3}{8}$ ",  $\frac{1}{2}$ ",  $\frac{5}{8}$ ",  $\frac{3}{4}$ ",  $\frac{7}{8}$ ",  $\frac{15}{16}$ ", or 1" Tips
- CAFS Capability

### FOG

- Operator Protection
- Ventilation
- Cooling & Extinguishing
- Foam Expansion
- Low Pressure Operation

### COMBINATION STREAMS

- Dual Attack
- Penetration & Protection
- Draw In Fresh Air While Attacking
- Provides Cooling For Closer Attack

**NEW!**  
**10 YEAR**  
**NOZZLE WARRANTY**  
**AND**  
**24 HOUR GUARANTEED**  
**NOZZLE REPAIR**

# SABERJET





## THE FIRST TRULY MULTI-PURPOSE NOZZLES

STYLE	INLET	PISTOL GRIP	WEIGHT	LENGTH	TIP OPTIONS
1512	1"	YES	5 3/8	10 1/2"	3/8", 1/2", 5/8"
1513	1"	NO	5	10 1/2"	3/8", 1/2", 5/8"
1515	1 1/2"	NO	5	10 1/2"	3/8", 1/2", 5/8"
1520	1 1/2"	YES	5 3/8	10 1/2"	3/8", 1/2", 5/8"
1522	1 1/2"	NO	5 3/4	11"	3/4", 7/8", 15/16", 1"
1523	1 1/2"	YES	6 1/4	11"	3/4", 7/8", 15/16", 1"
1525	2 1/2"	NO	6	11 5/8"	3/4", 7/8", 15/16", 1"
1526	2 1/2"	YES	6 1/2	11 5/8"	3/4", 7/8", 15/16", 1"


Full Fog Plus Flush Capability

Pattern Detents for Reduced Pattern Drift

Field Changeable Tips

Operates From 50-100 PSI

SaberJet operates as low as 50 PSI (Reducing Fire Fighter Fatigue)

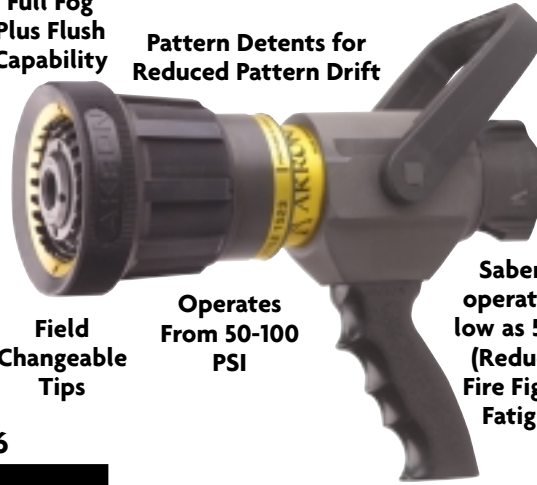

### SABERJET FLOW DATA - Styles 1522-1523-1525-1526

TIP SIZE	INLET PRESSURE (psi)	SOLID BORE FLOW (gpm)	FOG FLOW (gpm)	COMBINATION FLOW (gpm)
3/4"	50	108	95	199
	75	135	118	247
	100	158	135	280
7/8"	50	155	95	232
	75	190	118	289
	100	215	135	332
15/16"	50	180	95	250
	75	217	118	313
	100	248	135	360
1"	50	200	95	270
	75	246	118	334
	100	280	135	388

Actual results may vary depending on conditions.

ALL SABERJETS  
**NFPA 1964**  
COMPLIANT  
1998 EDITION

### SABERJET FLOW DATA - Styles 1512-1513-1515-1520

TIP SIZE	INLET PRESSURE (psi)	SOLID BORE FLOW (gpm)	Style 1512/1513 FOG FLOW (gpm)	Style 1515/1520 FOG FLOW (gpm)	Style 1512/1513 COMBINATION FLOW (gpm)	Style 1515/1520 COMBINATION FLOW (gpm)
3/8"	50	23	42	67	66	94
	75	30	52	82	78	118
	100	37	60	95	93	134
1/2"	50	45	42	67	88	110
	75	60	52	82	107	140
	100	67	60	95	126	162
5/8"	50	75	42	67	108	136
	75	95	52	82	136	170
	100	112	60	95	156	196

Actual results may vary depending on conditions.



In U.S./International  
Akron Brass Company  
PH: 330.264.5678  
FAX: 330.264.2944

Available in  
Canada through:  
Akron Manufacturing  
Company  
PH: 519.773.8431  
FAX: 519.773.3794

IN THE U.S. CALL 1.800.228.1161 | FAX 1.800.531.7335

www.akronbrass.com