
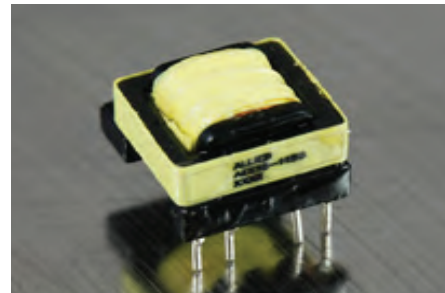


AEE16-1155

High Frequency Transformer

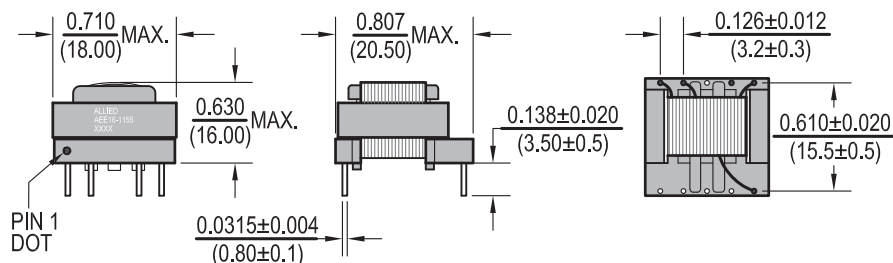

ELECTRICAL SPECIFICATIONS:

- INDUCTANCE: 100KHz/0.1V (HP-4284A)
2 - 1: 235 μ H \pm 10%
- LEAKAGE INDUCTANCE: 100KHz/0.1V (HP-4284A)
2 - 1: 50 μ H MAX (SHORT 6-5)
- DCR: (CH-502A AT 25°C)
2 - 1: 0.33 OHM MAX
6 - 5: 24 mOHM MAX
- HI-POT TEST:
PRI TO SEC : AC 3000V 3mA FOR 1 SEC
CORE TO COIL : AC 1000V 3mA FOR 1 SEC
- INSULATION TEST:
PRI TO SEC & COIL TO CORE : 100 mOHM MIN BY DC 500V
- GAP : CORE CENTER GAP

