

TENTATIVE

TOSHIBA Bi-CMOS INTEGRATED CIRCUIT SILICON MONOLITHIC

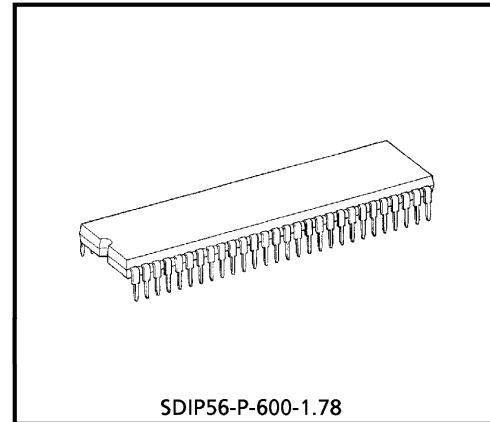
**T B 1 2 2 7 B N****VIDEO, CHROMA AND SYNCHRONIZING SIGNALS PROCESSING IC FOR  
PAL / NTSC / SECAM SYSTEM COLOR TV**

TB1227BN that is a signal processing IC for the PAL / NTSC / SECAM color TV system integrates video, chroma and synchronizing signal processing circuits together in a 56-pin shrink DIP plastic package.

TB1227BN incorporates a high performance picture quality compensation circuit in the video section, an automatic PAL / NTSC / SECAM discrimination circuit in the chroma section, and an automatic 50 / 60Hz discrimination circuit in the synchronizing section. Besides a crystal oscillator that internally generates 4.43MHz, 3.58MHz and M / N-PAL clock signals for color demodulation, there is a horizontal PLL circuit built in the IC.

The PAL / SECAM demodulation circuit which is an adjustment-free circuit incorporates a 1H DL circuit inside for operating the base band signal processing system.

Also, TB1227BN makes it possible to set or control various functions through the built-in I<sup>2</sup>C bus line.



SDIP56-P-600-1.78

Weight : 5.55g (Typ.)

**FEATURES**

## Video section

- Built-in trap filter
- Black expansion circuit
- Variable DC regeneration rate
- Y delay line
- Sharpness control by aperture control
- $\gamma$  correction
- VSM output

## Chroma section

- Built-in 1H Delay circuit
- PAL / SECAM base band demodulation system
- One crystal color demodulation circuit (4.43MHz, 3.58MHz, M / N-PAL)
- Automatic system discrimination, system forced mode
- 1H delay line also serves as comb filter in NTSC demodulation
- Built-in band-pass filter, SECAM bell filter
- Color limiter circuit
- Fsc output

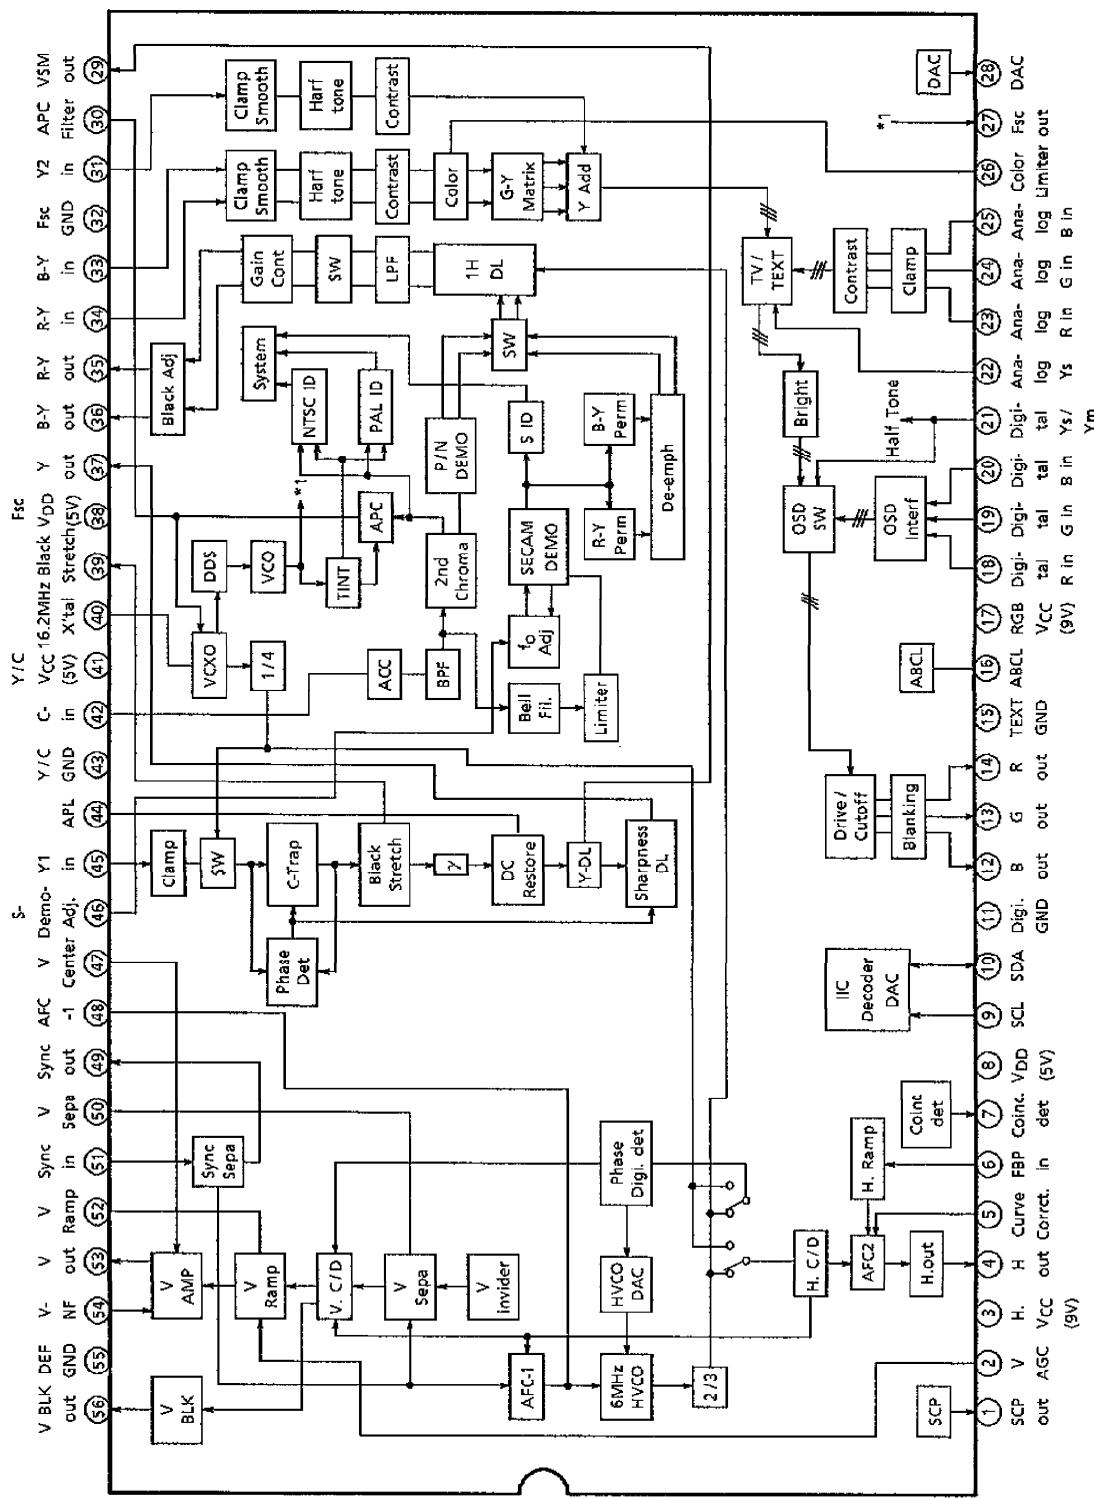
## Synchronizing deflecting section

- Built-in horizontal VCO resonator
- Adjustment-free horizontal / vertical oscillation by count-down circuit
- Double AFC circuit
- Vertical frequency automatic discrimination circuit
- Horizontal / vertical holding adjustment
- Vertical ramp output
- Vertical amplitude adjustment
- Vertical linearity / S-shaped curve adjustment
- SCP (Sand Castle Pulse) output

## Text section







- Linear RGB input
- OSD RGB input
- Cut / off-drive adjustment
- RGB primary signal output







BLOCK DIAGRAM







## TERMINAL FUNCTIONS

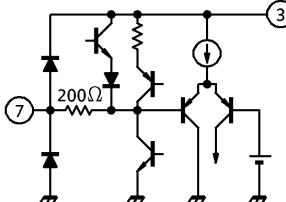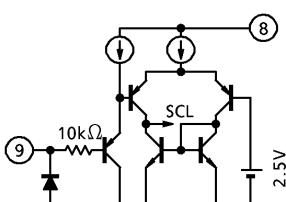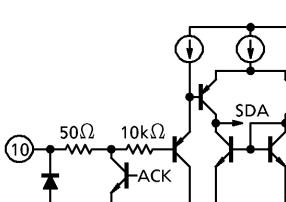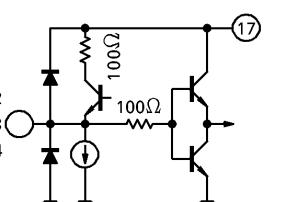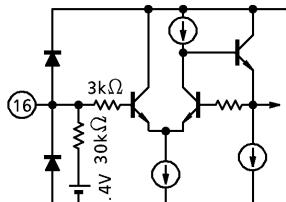PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
1	SCP OUTPUT	Output terminal of Sand Castle Pulse. (SCP) To connect drive resistor for SCP.		
2	V-AGC	Controls pin 52 to maintain a uniform V-ramp output. Connect a current smoothing capacitor to this pin.		—
3	H-VCC (9V)	V <sub>CC</sub> for the DEF block (deflecting system). Connect 9V (Typ.) to this pin.	—	—
4	Horizontal Output	Horizontal output terminal.		
5	Picture Distortion Correction	Corrects picture distortion in high voltage variation. Input AC component of high voltage variation. For inactivating the picture distortion correction function, connect 0.01μF capacitor between this pin and GND.		4.5V at Open
6	FBP Input	FBP input for generating horizontal AFC2 detection pulse and horizontal blanking pulse. The threshold of horizontal AFC2 detection is set H.VCC-2V <sub>f</sub> ( $V_f \approx 0.75V$ ). Confirming the power supply voltage, determine the high level of FBP.		








PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
7	Coincident Det.	To connect filter for detecting presence of H. synchronizing signal or V. synchronizing signal.		—
8	V <sub>DD</sub> (5V)	V <sub>DD</sub> terminal of the LOGIC block. Connect 5V (Typ.) to this pin.	—	—
9	SCL	SCL terminal of I <sup>2</sup> C bus.		—
10	SDA	SDA terminal of I <sup>2</sup> C bus.		—
11	Digital GND	Grounding terminal of LOGIC block.	—	—
12	B Output			
13	G Output	R, G, B output terminals.		
14	R Output			
15	TEXT GND	Grounding terminal of TEXT block.	—	—
16	ABCL	External unicolor brightness control terminal. Sensitivity and start point of ABL can be set through the bus.		6.4V at Open
17	RGB-V <sub>CC</sub> (9V)	V <sub>CC</sub> terminal of TEXT block. Connect 9V (Typ.) to this pin.	—	—

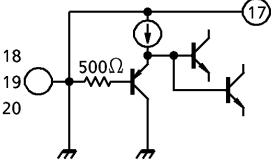

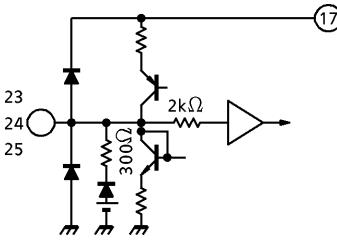
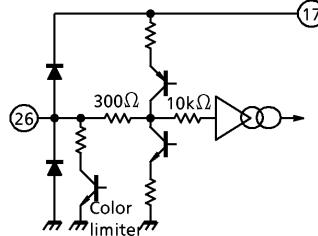
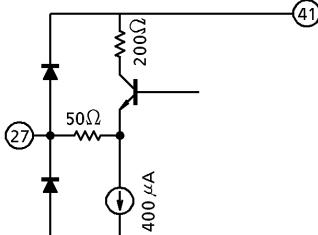
PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
18	Digital R Input	Input terminals of digital R, G, B signals. Input DC directly to these pins.		OSD — 3.0V TEXT — 2.0V — GND
19	Digital G Input			
20	Digital B Input	OSD or TEXT signal can be input to these pins.		
21	Digital YS / YM	Selector switch of halftone / internal RGB signal / digital RGB (pins 18, 19, 20).		OSD — 3.0V TEXT — 2.0V H.T. — 1.0V TV — GND
22	Analog YS	Selector switch of internal RGB signal or analog RGB (pins 23, 24, 25).		Analog RGB — 0.5V TV — GND
23	Analog R Input	Analog R, G, B input terminals. Input signal through the clamping capacitor. Standard input level : 0.5V <sub>p-p</sub> (100 IRE).		100IRE = 0.5V <sub>p-p</sub> — 4.6V — GND
24	Analog G Input			
25	Analog B Input			
26	Color Limiter	To connect filter for detecting color limit.		—
27	FSC Output	Output terminal of FSC.		3.58MHz — Other 500mV <sub>p-p</sub>

PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
28	1Bit DAC Output Terminal	Enable to change slave address to 8Ah by a connecting V <sub>CC</sub> with this terminal.		4.5V (Date : (1)) 2.0V (Date : (0))
29	VSM Output Terminal	Power output the signal that is primary differentiated Y signal. Enable to change output amplifier and phase by the Bus.		—
30	APC Filter	To connect APC filter for chroma demodulation.		DC 3.2V
31	Y <sub>2</sub> Input	Input terminal of processed Y signal. Input Y signal through clamping capacitor. Standard input level : 0.7V <sub>p-p</sub>		0.7V <sub>p-p</sub> 2.0V GND
32	Fsc GND	Grounding terminal of VCXO block. Insert a decoupling capacitor between this pin and pin 38 (Fsc V <sub>DD</sub> ) at the shortest distance from both.	—	—
33	B-Y Input	Input terminal of B-Y or R-Y signal. Input signal through a clamping capacitor.		DC 2.5V
34	R-Y Input			AC B-Y : 650mV <sub>p-p</sub> R-Y : 510mV <sub>p-p</sub> (with input of PAL-75% color bar signal)

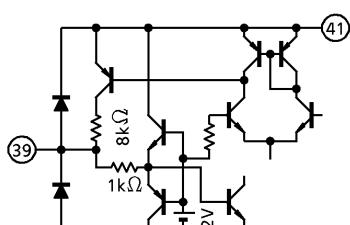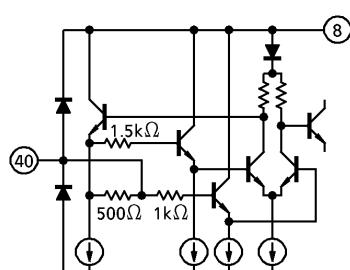PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
35	R-Y Output	Output terminal of demodulated R-Y or B-Y signal. There is an LPF for removing carrier built in this pin.		DC 1.9V
36	B-Y Output			AC B-Y : 650mV <sub>p-p</sub> R-Y : 510mV <sub>p-p</sub> (with input of PAL-75% color bar signal)
37	Y Output	Output terminal of processed Y signal. Standard output level : 0.7V <sub>p-p</sub>		0.7V <sub>p-p</sub> 2.3V GND
38	Fsc VDD	V <sub>DD</sub> terminal of DDS block. Insert a decoupling capacitor between this pin and pin 32 (Fsc GND) at the shortest distance from both. If decoupling capacitor is inserted at a distance from the pins, it may cause spurious deterioration.		—
39	Black Stretch	To connect filter for controlling black expansion gain of the black expansion circuit. Black expansion gain is determined by voltage of this pin.		DC 1.6V
40	16.2MHz X'tal	To connect 16.2MHz crystal clock for generating sub-carrier. Lowest resonance frequency ( $f_0$ ) of the crystal oscillation can be varied by changing DC capacity. Adjust $f_0$ of the oscillation frequency with the board pattern.		DC 4.1V

PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
41	Y/C V <sub>CC</sub> (5V)	V <sub>CC</sub> terminal of Y/C signal processing block.	—	—
42	Chroma Input	Chroma signal input terminal. Input negative 1.0V <sub>p-p</sub> sync composite video signal to this pin through a coupling capacitor.		DC 2.4V AC : 300mV <sub>p-p</sub> burst
43	Y/C GND	Grounding terminal of Y/C signal processing block.	—	—
44	APL	To connect filter for DC regeneration compensation. Y signal after black expansion can be monitored by opening this pin.		DC 2.2V
45	Y <sub>1</sub> Input	Input terminal of Y signal. Input negative 1.0V <sub>p-p</sub> sync composite video signal to this pin through a clamping capacitor.		1.0V <sub>p-p</sub> 2.2V GND
46	S-Demo-Adj.	To connect f <sub>0</sub> adjustment filter for SECAM demodulation.		DC 3.2V
47	DC Output Terminal For V Centering	Enable to control output DC voltage by the bus.		DC 2.7~6.3V

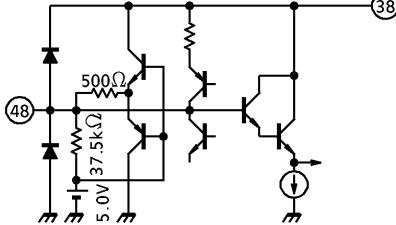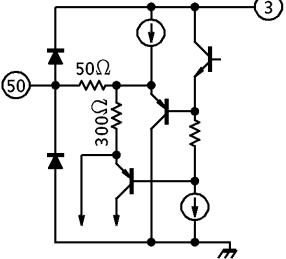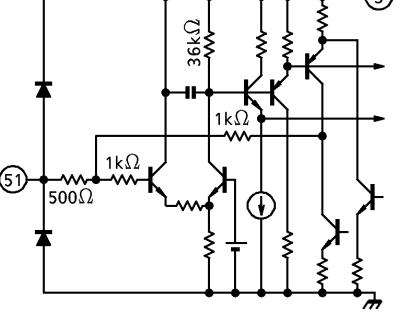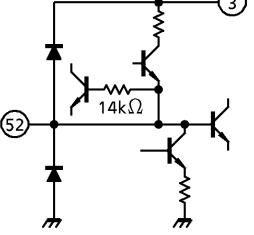PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
48	AFC1 Filter	To connect filter for horizontal AFC1 detection. Horizontal frequency is determined by voltage of this pin.		DC 5.0V
49	Sync Output	Output terminal of synchronizing signal separated by sync separator circuit. Connect a pull-up resistor to this pin because it is an open-collector output type.		
50	V-Sepa.	To connect filter for vertical synchronizing separation.		DC 5.9V
51	Sync Input	Input terminal of synchronizing separator circuit. Input signal through a clamping capacitor to this pin. Negative 1.0V <sub>p-p</sub> sync.		
52	V-Ramp	To connect filter for generating V-ramp waveform.		

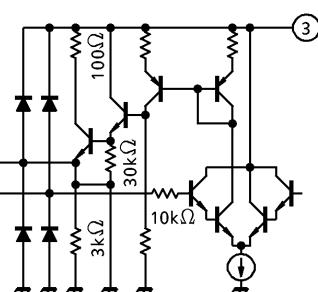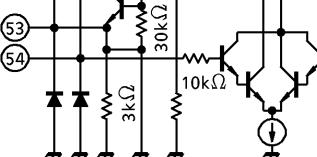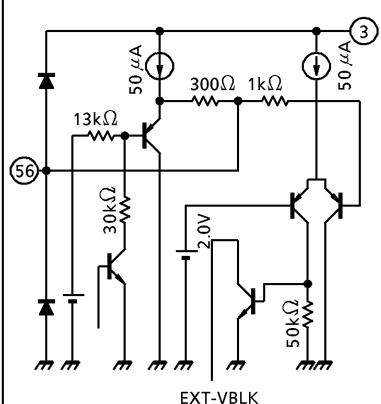PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT	INPUT / OUTPUT SIGNAL
53	Vertical Output	Output terminal of vertical ramp signal.		
54	V-NF	Input terminal of vertical NF signal.		
55	DEF GND	Grounding terminal of DEF (deflection) block.	—	—
56	V BLK Output	Output terminal of V blanking		

BUS CONTROL MAP  
WRITE DATA  
Slave address : 88H (Pin28-High : 8AH)

BLOCK	SUB ADDR	MSB 7	6	5	4	3	2	1	LSB 0	PRESET
VIDEO / TEXT	00									1 0 0 0 0 0 0 0 0 0
	01									1 0 0 0 0 0 0 0 0 0
	02									1 0 0 0 0 0 0 0 0 0
	03	*								0 1 0 0 0 0 0 0 0 0
	04	P/N KIL	ND SW							SHARPNESS
	05	DTrp-SW	R-Man	B-Man						Y SUB CONTRAST
VIDEO / TEXT	06									RGB-CONTRAST
	07	*	*	*	*	*	*	*	*	*
	08	Y Y	WPL SW	0	BLUE BACK MODE					Y-DL SW
	09				G DRIVE GAIN					
	0A				B DRIVE GAIN					
	0B		HORIZONTAL POSITION			AFC MODE	H.CK SW			
	0C				R CUT OFF					
TEXT (P/N)	0D				G CUT OFF					
	0E				B CUT OFF					
	0F	B. S. OFF	C-TRAP	OFST SW	C-TOF	P/N GP	CLL SW	WBLK SW	WMUT SW	1 0 0 0 0 0 0 0 0 1
SYSTEM	10	\$-INHB	358 Trap	F-B / W	X'tal MODE					
	11		R-Y BLACK OFFSET			B-Y BLACK OFFSET				
P/N	12	CLL LEVEL		PN CD ATT		TOF Q	TOF FO			
	13	V-MODE	VSM PHASE	VSM GAIN		C-TRAP Q				C-TRAP FO
VIDEO (DEF)	14		BLACK STRETCH POINT			DC TRAN RATE				APA-CON FO / SW
	15		ABL POINT			ABL GAIN				HALF TONE SW
GEOME TRY	16	H BLK PHASE		V FREQ			V OUT PHASE			
	17			V-AMPLITUDE				*	1 0 0 0 0 0 0 0 0 0	
DEF-V	18		V CENTERING				COINCIDENT DET			1 0 0 0 0 0 0 0 0 0
	19		V S-CORRECTION				DRG SW			0 0 0 0 0 0 0 0 0 1
SECAM	1A		V LINEARITY		V-CD MD	DRV CNT	VAGC SP			
	1B	MUTE MODE								0 1 1 1 1 1 1 1 1 1
	1C	BLK SW								0 0 0 0 0 0 0 0 0 0
SECAM	1D	NOISE DET LEVEL								1 0 1 1 1 1 1 1 1 1
	1E	N COMB								WIDE P-MUTE STOP PHASE
	1F	S-field	SCD ATT	DEMP FO	S GP	V-ID SW	S KIL	BELL FO		0 0 0 0 0 0 0 0 0 0

(Note) \* : Data is ignored.

## READ-IN DATA

Slave address : 89H (Pin28-High : 8BH)

		MSB 7	6	5	4	3	2	1	LSB 0
00	PORES	COLOR SYSTEM		X'tal		V-FREQ	V-STD	N-DET	
01	LOCK	RGBOUT	Y <sub>1</sub> -IN	UV-IN	Y <sub>2</sub> -IN	H	V	V-GUARD	

## BUS CONTROL FUNCTION

## WRITE FUNCTION

ITEM	DESCRIPTION	NUMBER OF BITS	VARIABLE RANGE	PRESET VALUE
UNI-COLOR	—	8bit	-18dB~0dB	80h MAX -5.0dB
BRIGHT	—	8bit	-1V~1V	80h 0V
COLOR	—	8bit	~0dB	80h -6dB
TINT	—	7bit	-45°~45°	40h 0°
P/N KIL	P/N KILLER sensitivity control	1bit	Normal / Low	00h NORMAL
SHARPNESS	—	6bit	-6dB~12dB	20h +3dB
DTrp-SW	SECAM double trap ON/OFF	1bit	ON/OFF	01h OFF
R-Mon	TEXT-11 dB pre-amplification UV output	1bit	Normal / Monitor	00h Normal
B-Mon	(Pin 35 : Bo, Pin 36 : Ro)	1bit	Normal / Monitor	00h Normal
Y SUB CONTRAST	—	5bit	-3dB~+3dB	10h 0dB
RGB-CONTRAST	EXT RGB UNI-COLOR control	8bit	-18dB~0dB	80h MAX -5.0dB
Y <sub>γ</sub>	γ ON/OFF	1bit	OFF / 95 IRE	00h ON
WPL SW	White peak limit level	1bit	130 IRE / OFF	00h 130 IRE
BLUE BACK MODE	Luminance selector switch	2bit	IRE ; OFF, 40, 50, 50	00h OFF
Y-DL SW	Y-DL TIME (28, 33, 38, 43, 48)	3bit	280~480ns after Y IN	04h 480ns
G DRIVE GAIN	—	8bit	-5dB~3dB	80h 0dB
B DRIVE GAIN	—	8bit	-5dB~3dB	80h 0dB
HORIZONTAL POSITION	Horizontal position adjustment	5bit	-3μs~+3μs	10h 0μs

ITEM	DESCRIPTION	NUMBER OF BITS	VARIABLE RANGE	PRESET VALUE
AFC MODE	AFC1 detection sensitivity selector	2bit	dB ; AUTO, 0, -10, -10	00h AUTO
H-CK SW	HOUT generation clock selector	1bit	384fh-VCO, FSC-VCXO	01h FSC-VCXO
R CUT OFF	—	8bit	-0.5~0.5V	00h -0.5V
G CUT OFF	—	8bit	-0.5~0.5V	00h -0.5V
B CUT OFF	—	8bit	-0.5~0.5V	00h -0.5V
B. S. OFF	Black expansion ON/OFF	1bit	ON/OFF	00h ON
C-TRAP	Chroma Trap ON/OFF SW	1bit	ON/OFF	00h ON
FST SW	Black offset SECAM discrimination interlocking switch	1bit	SECAM only / All systems	00h S only
C-TOF	P/N TOF ON/OFF SW	1bit	ON/OFF	00h ON
P/N GP	PAL GATE position	1bit	Standard / 0.5μs delay	00h Standard
CL-L SW	COLOR LIMIT ON/OFF	1bit	ON/OFF	00h ON
WBLK SW	WIDE V-BLK ON/OFF	1bit	OFF/ON	00h OFF
WMUT SW	WIDE Picture-MUTE ON/OFF	1bit	OFF/ON	00h OFF
S-INHBT	To detect or not to detect SECAM	1bit	Yes/No	00h Yes
3.58 Trap	C Trap-f <sub>0</sub> , force 3.58MHz switch	1bit	AUTO / Forced 3.58MHz	00h AUTO
F-B/W	Force B/W switch	1bit	AUTO / Forced B/W	00h AUTO
X'tal MODE	APC oscillation frequency selector switch	3bit	000 ; European system AUTO, 001 ; 3N 010 ; 4P, 011 ; 4P (N inhibited) 100 ; S.American system AUTO, 101 ; 3N, 110 ; MP, 111 ; NP	00h European system AUTO
COLOR SYSTEM	Chroma system selection	2bit	AUTO, PAL, NTSC, SECAM	00h AUTO
R-Y BLACK OFFSET	R-Y color difference output black offset adjustment	4bit	-24~21mV STEP 3mV	08h 0mV
B-Y BLACK OFFSET	B-Y color difference output black offset adjustment	4bit	-24~21mV STEP 3mV	08h 0mV
CLL LEVEL	Color limit level adjustment	2bit	91, 100, 108, 116%	02h 108%

(Note) 3N ; 3.58-NTSC, 4P ; 4.43-PAL, MP ; M-PAL, NP ; N-PAL  
 European system AUTO ; 4.43-PAL, 4.43-NTSC, 3.58-NTSC, SECAM  
 S.American system AUTO ; 3.58-NTSC, M-PAL, N-PAL

ITEM	DESCRIPTION	NUMBER OF BITS	VARIABLE RANGE	PRESET VALUE
PN CD ATT	P/N color difference amplitude adjustment	2bit	+1~-2dB STEP 1dB	01h 0dB
TOF Q	TOF Q adjustment	2bit	1.0, 1.5, 2.0, 2.5	02h 2.0
TOF F <sub>0</sub>	TOF f <sub>0</sub> adjustment	2bit	kHz ; 0, 500, 600, 700	02h 600kHz
VSM PHASE	VSM output phase	2bit	+20ns, +20ns, 0ns, 0ns	02h 0ns
VSM GAIN	VSM output gain	2bit	0dB, 0dB, -6dB, OFF	03h OFF
C-TRAP Q	Chroma trap Q control	2bit	1.0, 1.5, 2.0, 2.5	02h 2.0
C-TRAP F <sub>0</sub>	Chroma trap f <sub>0</sub> control	2bit	kHz ; -100, -50, 0, +50	02h 0kHz
BLACK STRETCH POI	Black expansion start point setting	3bit	28~70% IRE × 0.4	05h 56% IRE
DC TRAN RATE	Direct transmission compensation degree selection	3bit	100~130% APL	00h 100%
APA-CON PEAK F <sub>0</sub>	Sharpness peak frequency selection	2bit	kHz ; 2.5, 3.1, 4.2, OFF	02h 4.2kHz
ABL POINT	ABL detection voltage	3bit	ABL point ; 6.5V~5.9V	00h 6.5V
ABL GAIN	ABL sensitivity	3bit	Brightness ; 0~-2V	00h 0V
HALF TONE SW	Halftone gain selection	2bit	-3dB, -6dB, OFF, OFF	00h -3dB
H BLK PHASE	Horizontal blanking end position	3bit	0~3.5μs step 0.5μs	00h 0μs
V FREQ	Vertical frequency	2bit	AUTO, 60Hz, Forced 60, 50, 60	00h AUTO
V OUT PHASE	Vertical position adjustment	3bit	0~7H STEP 1H	00h 0H
V-AMPLITUDE	Vertical amplitude selection	7bit	-50~50%	40h 0%
1bit DAC	1bit DAC output	1bit	LOW, HIGH	00h LOW
V CENTERING	V Centering	6bit	1~4V	20h 2.5V
COINCIDENT MODE	Discriminator output signal selection	2bit	00 ; DSYNC 01 ; DSYNC × AFC 10 ; Field counting 11 ; VP is present.	02h Field counting
V S-CORRECTION	Vertical S-curve correction	7bit	Reverse S-curve, S-curve	40h —
V-MODE	Force Sync Mode Selection	1bit	TELETEXT / Normal	01h Normal
DRG SW	Drive reference axis selection	1bit	R/G	00h R
V LINEARITY	Vertical linearity correction	5bit	(one side)	00h —
ND SW	Noise Det SW	1bit	Normal, Low	00h Normal
V-CD MD	Vertical count-down mode selection	1bit	AUTO / Force synchronization	00h AUTO

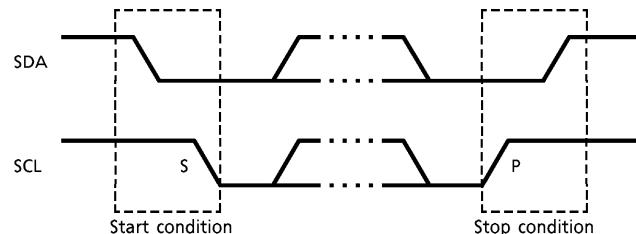
ITEM	DESCRIPTION	NUMBER OF BITS	VARIABLE RANGE	PRESET VALUE
DRV CNT	All drive gains forced centering switch	1bit	OFF / Force centering	00h OFF
VAGC SP	Vertical ramp time constant selection	1bit	Normal / High speed	01h High speed
MUTE MODE	OFF, RGB mute, Y mute, transverse	2bit	OFF, RGB, Y, Transverse	01h RGB
WIDE V-BLK START PH	Vertical pre-position selection	6bit	- 64~ - 1H STEP 1H	3Fh - 1H
BLK SW	Blanking ON / OFF	1bit	ON / OFF	00h ON
WIDE V-BLK STOP PH	Vertical post-position selection	7bit	0~128H STEP 1H	00h 0H
NOISE DET LEVEL	Noise detection level selection	2bit	ND SW Normal : 0.15, 0.125, 0.1, 0.075 Low    : 0.5, 0.475, 0.45, 0.425	02h 0.1
WIDE P-MUTE START PH	Video mute pre-position selection	6bit	- 64~ - 1H STEP 1H	3Fh - 1H
N COMB	1H addition selection	1bit	OFF / ADD	00h OFF
WIDE P-MUTE STOP PH	Video mute post-position selection	7bit	0~128H STEP 1H	00h 0H
S-field	SECAM color and Q selection in weak electric field	1bit	Weak electric field control ON / OFF	00h ON
SCD ATT	SECAM color difference amplitude adjustment	1bit	0 / - 1dB	00h 0dB
DEMO F <sub>0</sub>	SECAM deemphasis time constant selection	1bit	85kHz / 100kHz	00h 85kHz
S GP	SECAM gate position selection	1bit	Standard / 0.5μs delay	00h Standard
V-ID SW	SECAM V-ID ON / OFF switch	1bit	OFF / ON	00h OFF
S KIL	SECAM KILLER sensitivity selection	1bit	NORMAL / LOW	00h NORMAL
BELL F <sub>0</sub>	Bell f <sub>0</sub> adjustment	2bit	- 46~92kHz STEP 46kHz	01h 0kHz

## READ-IN FUNCTION


ITEM	DESCRIPTION	NUMBER OF BITS
PONRES	0 : POR cancel, 1 : POR ON	1bit
COLOR SYSTEM	00 : B/W, 01 : PAL 10 : NTSC, 11 : SECAM	2bit
X'tal	00 : 4.433619MHz 01 : 3.579545MHz 10 : 3.575611MHz (M-PAL) 11 : 3.582056MHz (N-PAL)	2bit
V-FREQ	0 : 50Hz, 1 : 60Hz	1bit
V-STD	0 : NON-STD, 1 : STD	1bit
N-DET	0 : Low, 1 : High	1bit
LOCK	0 : UN-LOCK, 1 : LOCK	1bit
RGBOUT, Y <sub>1</sub> -IN UV-IN, Y <sub>2</sub> -IN, H, V	Self-diagnosis 0 : NG, 1 : OK	1bit each
V-GUARD	Detection of breaking neck 0 : Abnormal, 1 : Normal	1bit

DATA TRANSFER FORMAT VIA I<sup>2</sup>C BUS


Start and stop condition




Bit transfer

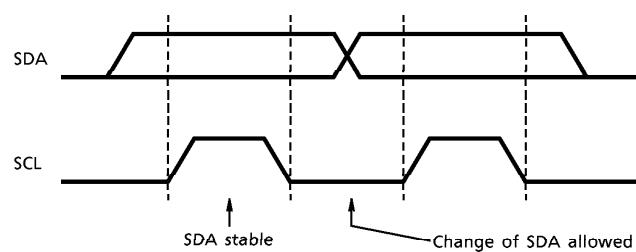


Acknowledge

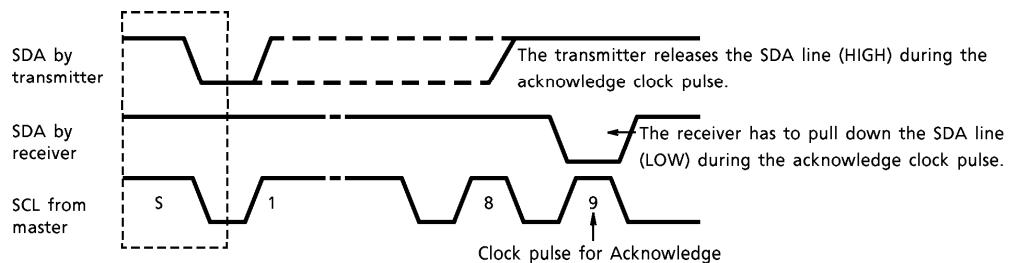


## Data transmit format 1

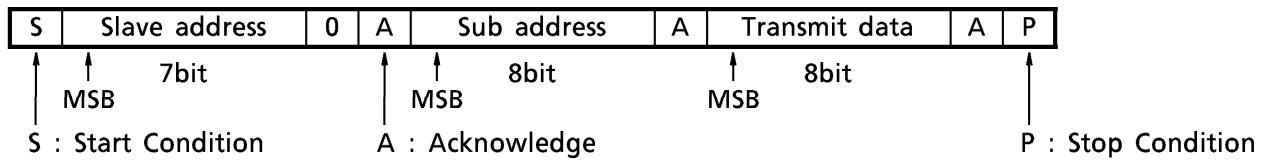

## Data transmit format 2

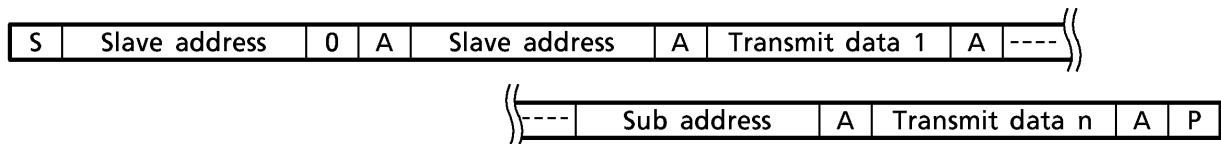


## Data receive format

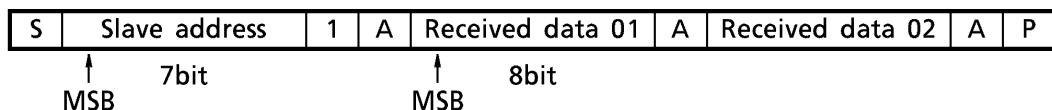

At the moment of the first acknowledge, the master transmitter becomes a master receiver and the slave receiver becomes a slave transmitter. This acknowledge is still generated by the slave.

The STOP condition is generated by the master.

## Optional data transmit format : Automatic increment mode

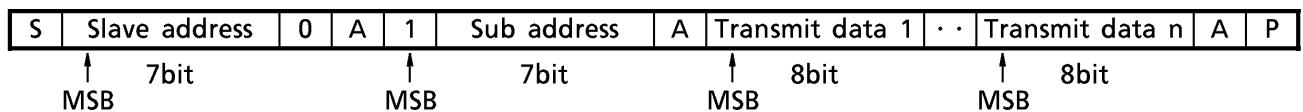

In this transmission method, data is set on automatically incremented sub-address from the specified sub-address.

Purchase of TOSHIBA I<sup>2</sup>C components conveys a license under the Philips I<sup>2</sup>C Patent Rights to use these components in an I<sup>2</sup>C system, provided that the system conforms to the I<sup>2</sup>C Standard Specification as defined by Philips.

**MAXIMUM RATINGS (Ta = 25°C)**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V <sub>CCMAX</sub>	12	V
Permissible Loss	P <sub>DMAX</sub>	2190 (Note)	mW
Power Consumption Declining Degree	1 / Q <sub>ja</sub>	17.52	mW / °C
Input Terminal Voltage	V <sub>in</sub>	GND - 0.3~V <sub>CC</sub> + 0.3	V
Input Signal Voltage	e <sub>in</sub>	7	V <sub>p-p</sub>
Operating Temperature	T <sub>opr</sub>	- 20~65	°C
Conserving Temperature	T <sub>stg</sub>	- 55~150	°C

(Note) In the condition that IC is actually mounted. See the diagram below.

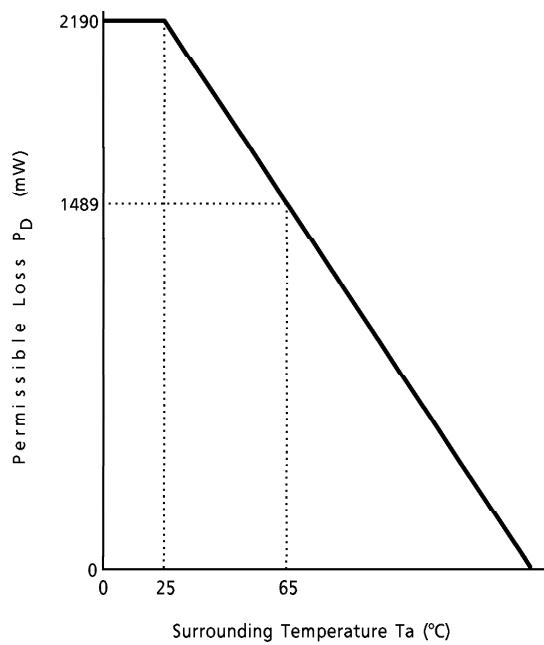


Fig. Power consumption declining curve relative to temperature change

## RECOMMENDED OPERATING CONDITION

CHARACTERISTIC	DESCRIPTION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	Pin 3, pin 17	8.50	9.0	9.25	V
	Pin 8, pin 38, pin 41	4.75	5.0	5.25	
Video Input Level	100% white, negative sync	0.9	1.0	1.1	V <sub>p-p</sub>
Chroma Input Level		0.9	1.0	1.1	
Sync Input Level		0.9	1.0	2.2	
FBP Width	—	11	12	13	μs
Incoming FBP Current (Note)	—	—	—	1.5	mA
H. Output Current	—	—	1.0	2.0	
RGB Output Current	—	—	1.0	2.0	
Analog RGB Input Level	—	—	0.7	0.8	V
OSD RGB Input Level	In TEXT input	0.7	1.0	1.3	
	In OSD input	—	4.2	5.0	
Incoming Current to Pin 49	Sync-out	—	0.5	1.0	mA

(Note) The threshold of horizontal AFC2 detection is set H.V<sub>CC</sub>-2V<sub>f</sub> (V<sub>f</sub>≈0.75V).  
Confirming the power supply voltage, determine the high level of FBP.

## ELECTRICAL CHARACTERISTIC

( Unless otherwise specified, H, RGB V<sub>CC</sub>=0V, V<sub>DD</sub>, Fsc V<sub>DD</sub>,  
Y/C V<sub>CC</sub>=5V, Ta = 25 ± 3°C )

## CURRENT CONSUMPTION

PIN No.	CHARACTERISTIC	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT
3	H.V <sub>CC</sub> (9V)	I <sub>CC1</sub>	—	16.0	19.0	23.5	mA
8	V <sub>DD</sub> (5V)	I <sub>CC2</sub>	—	8.8	11.0	14.0	
17	RGB V <sub>CC</sub> (9V)	I <sub>CC3</sub>	—	25.0	31.5	39.0	
38	Fsc V <sub>CC</sub> (5V)	I <sub>CC4</sub>	—	6.8	8.5	11.0	
41	Y/C V <sub>CC</sub> (9V)	I <sub>CC5</sub>	—	80	100	130	

## TERMINAL VOLTAGE

PIN No.	PIN NAME	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT
16	ABCL	V <sub>16</sub>	—	5.9	6.4	6.9	V
18	OSD R Input	V <sub>18</sub>	—	—	0	0.3	V
19	OSD G Input	V <sub>19</sub>	—	—	0	0.3	V
20	OSD B Input	V <sub>20</sub>	—	—	0	0.3	V
21	Digital Ys	V <sub>21</sub>	—	—	0	0.3	V
22	Analog Ys	V <sub>22</sub>	—	—	0	0.3	V
23	Analog R Input	V <sub>23</sub>	—	4.2	4.6	5.0	V
24	Analog G Input	V <sub>24</sub>	—	4.2	4.6	5.0	V
25	Analog B Input	V <sub>25</sub>	—	4.2	4.6	5.0	V
28	DAC	V <sub>28</sub>	—	1.7	2.0	2.3	V
31	Y <sub>2</sub> Input	V <sub>31</sub>	—	1.7	2.0	2.3	V
33	B-Y Input	V <sub>33</sub>	—	2.2	2.5	2.8	V
34	R-Y Input	V <sub>34</sub>	—	2.2	2.5	2.8	V
35	R-Y Output	V <sub>35</sub>	—	1.5	1.9	2.3	V
36	B-Y Output	V <sub>36</sub>	—	1.5	1.9	2.3	V
37	Y <sub>1</sub> Output	V <sub>37</sub>	—	1.9	2.3	2.7	V
40	16.2MHz X'tal Oscillation	V <sub>40</sub>	—	3.6	4.1	4.6	V
42	Chroma Input	V <sub>42</sub>	—	2.0	2.4	2.8	V
50	V-Sepa.	V <sub>50</sub>	—	5.4	5.9	6.4	V

## AC CHARACTERISTIC

Video section

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Y Input Pedestal Clamping Voltage	VYclp	—	(Note) Y1	2.0	2.2	2.4	V
Chroma Trap Frequency	ftr3	—	(Note) Y2	3.429	3.58	3.679	MHz
	ftr4	—		4.203	4.43	4.633	
Chroma Trap Attenuation (3.58MHz)	Gtr3a	—	(Note) Y3	20	26	52	dB
	Gtr3f	—		20	26	52	
(4.43MHz) (SECAM)	Gtr4	—	(Note) Y4	18	26	52	dB
	Gtrs	—	(Note) Y5	90	95	99	
Y <sub>γ</sub> Correction Point	γp	—	(Note) Y6	-2.6	-2.0	-1.3	—
Y <sub>γ</sub> Correction Curve	γc	—	(Note) Y7	15	20	25	kΩ
APL Terminal Output Impedance	Zo44	—	(Note) Y8	0.11	0.13	0.15	times
DC Transmission Compensation Amplifier Gain	Adrmax	—	(Note) Y9	0.44	0.06	0.08	
	Adrcnt	—		1.20	1.5	1.65	IRE
Maximum Gain of Black Expansion Amplifier	Ake	—	(Note) Y10	65	77.5	80	
Black Expansion Start Point	VBS9MX	—	(Note) Y11	55	62.5	70	
	VBS9CT	—		48	55.5	63	
	VBS9MN	—		35	42.5	50	
	VBS2MX	—		25	31.5	38	
	VBS2CT	—		19	25.5	32	
	VBS2MN	—		15	16	17	μs
Black Peak Detection Period (Horizontal)	TbpH	—	(Note) Y12	33	34	35	H
(Vertical)	TbpV	—		fp25	1.5	2.5	3.4
Picture Quality Control Peaking Frequency	fp31	—	(Note) Y13	fp31	1.9	3.1	4.3
	fp42	—		fp42	3.0	4.2	5.4
	GS25MX	—		GS25MX	12.0	14.5	17.0
Picture Quality Control Maximum Characteristic	GS31MX	—	(Note) Y14	GS31MX	12.0	14.5	17.0
	GS42MX	—		GS42MX	10.6	13.5	16.4
	GS25MN	—	(Note) Y15	GS25MN	-22.0	-19.5	-17.0
Picture Quality Control Minimum Characteristic	GS31MN	—		GS31MN	-22.0	-19.5	-17.0
	GS42MN	—		GS42MN	-19.5	-16.5	-13.5
Picture Quality Control Center Characteristic	GS25CT	—	(Note) Y16	GS25CT	6.0	8.5	11.0
	GS31CT	—		GS31CT	4.6	7.5	10.4
	GS42CT	—		GS42CT	-6.5	0	1.0
Y Signal Gain	Gy	—	(Note) Y17	-1.0	0	1.6	dB
Y Signal Frequency Characteristic	Gfy	—	(Note) Y18	0.9	1.2	1.5	
Y Signal Maximum Input Range	Vyd	—	(Note) Y19	0.9	1.2	1.5	

## Chroma section

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MIN.	UNIT	
ACC Characteristic $f_o = 3.58$	3N <sub>e</sub> AT	—	(Note) C <sub>1</sub>	30	35	90	mV <sub>p-p</sub>	
	3N <sub>F1</sub> T	—		68	85	105		
	3N <sub>AT</sub>	—		0.9	1.0	1.1	times	
	3N <sub>e</sub> AE	—		18	35	—		
	3N <sub>F1</sub> E	—		71	85	102		
	3N <sub>AE</sub>	—		0.9	1.0	1.1		
	4N <sub>e</sub> AT	—		18	35	—		
	4N <sub>F1</sub> T	—		71	85	102		
	4N <sub>AT</sub>	—		0.9	1.0	1.1	times	
	4N <sub>e</sub> AE	—		18	35	—		
Band Pass Filter Characteristic $f_o = 3.58$	4N <sub>F1</sub> E	—		71	85	102	times	
	4N <sub>AE</sub>	—		0.9	1.0	1.1		
	3Nf <sub>o</sub> 0	—	(Note) C <sub>2</sub>	3.43	3.579	3.73	MHz	
	3Nf <sub>o</sub> 500	—		3.93	4.079	4.23		
	3Nf <sub>o</sub> 600	—		4.03	4.179	4.33		
	3Nf <sub>o</sub> 700	—		4.13	4.279	4.43		
	4Nf <sub>o</sub> 0	—		4.28	4.433	4.58		
	4Nf <sub>o</sub> 500	—		4.78	4.933	4.58		
	4Nf <sub>o</sub> 600	—		4.88	5.033	5.18		
	4Nf <sub>o</sub> 700	—		4.98	5.133	5.28		
Band Pass Filter, -3dB Band Characteristic $f_o = 3.58$	f <sub>o</sub> 0	—		1.64	1.79	1.94	MHz	
	f <sub>o</sub> 500	—						
	f <sub>o</sub> 600	—						
	f <sub>o</sub> 700	—						
	f <sub>o</sub> 0	—	(Note) C <sub>3</sub>					
	f <sub>o</sub> 500	—	2.07	2.22	2.37			
	f <sub>o</sub> 600	—						
	f <sub>o</sub> 700	—						
	Q <sub>1</sub>	—						
Band Pass Filter, Q Characteristic Check $f_o = 3.58$	Q <sub>1.5</sub>	—	(Note) C <sub>4</sub>	—	3.58	—		
	Q <sub>2.0</sub>	—		—	2.39	—		
	Q <sub>2.5</sub>	—		1.64	1.79	1.94		
	Q <sub>1</sub>	—		—	1.43	—		
	Q <sub>1.5</sub>	—		—	4.43	—		
	Q <sub>2.0</sub>	—		—	2.95	—		
	Q <sub>2.5</sub>	—		2.07	2.22	2.37		
	—	—		—	1.77	—		

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
1 / 2 $f_c$ Trap Characteristic $f_o = 3.58$	$f_{o0}$	—	(Note) C <sub>5</sub>	1.45	1.60	1.75	MHz
	$f_{o500}$	—		1.70	1.85	2.00	
	$f_{o600}$	—		1.75	1.90	2.06	
	$f_{o700}$	—		1.80	1.95	2.10	
	$f_{o0}$	—		1.85	2.00	2.15	
	$f_{o500}$	—		2.00	2.15	2.30	
	$f_{o600}$	—		2.05	2.20	2.35	
	$f_{o700}$	—		2.10	2.25	2.40	
Tint Control Range ( $f_o = 600\text{kHz}$ )	$3N\Delta\theta 1$	—	(Note) C <sub>6</sub>	35.0	45.0	55.0	°
	$3N\Delta\theta 2$	—		- 55.0	- 45.0	- 35.0	
	$4N\Delta\theta 1$	—		35.0	45.0	55.0	
	$4N\Delta\theta 2$	—					
Tint Control Variable Range ( $f_o = 600\text{kHz}$ )	$3N\Delta\theta T$	—	(Note) C <sub>7</sub>	70.0	90.0	110.0	
	$4N\Delta\theta T$	—					
Tint Control Characteristic	$3T\theta Tin$	—	(Note) C <sub>8</sub>	39	40	47	bit
	$3E\theta Tin$	—		73	80	87	Step
	$3N\Delta Tin$	—		39	40	47	bit
	$4T\theta Tin$	—		73	80	87	Step
	$4E\theta Tin$	—					
	$4N\Delta Tin$	—					
APC Lead-In Range (Lead-In Range)	4.433PH	—	(Note) C <sub>9</sub>	350	500	1500	Hz
	4.433PL	—		- 350	- 500	- 1500	
	3.579PH	—		350	500	1700	
	3.579PL	—		- 350	- 500	- 1700	
	4.433HH	—		400	500	1100	
	4.433HL	—		- 400	- 500	- 1100	
	3.579HH	—		400	500	1100	
	3.579HL	—		- 400	- 500	- 1100	
APC Control Sensitivity	$3.58\beta 3$	—	(Note) C <sub>10</sub>	1.50	2.2	2.90	—
	$4.43\beta 3$	—		1.70	2.4	3.10	
	M-PAL $\beta M$	—					
	N-PAL $\beta N$	—		1.50	2.2	2.90	

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Killer Operation Input Level	3N-VTK1	—	(Note) C <sub>11</sub>	1.8	2.5	3.2	mV <sub>p-p</sub>
	3N-VTC1	—		2.2	3.2	4.0	
	3N-VTK2	—		2.5	3.6	4.5	
	3N-VTC2	—		3.2	4.5	5.6	
	4N-VTK1	—		1.8	2.5	3.2	
	4N-VTC1	—		2.2	3.2	4.0	
	4N-VTK2	—		2.5	3.6	4.5	
	4N-VTC2	—		3.2	4.5	5.6	
	4P-VTK1	—		1.8	2.5	3.2	
	4P-VTC1	—		2.2	3.2	4.0	
	4P-VTK2	—		2.5	3.6	4.5	
	4P-VTC2	—		3.2	4.5	5.6	
	MP-VTK1	—		1.8	2.5	3.2	
	MP-VTC1	—		2.2	3.2	4.0	
	MP-VTK2	—		2.5	3.6	4.5	
	MP-VTC2	—		3.2	4.5	5.6	
	NP-VTK1	—		1.8	2.5	3.2	
	NP-VTC1	—		2.2	3.2	4.0	
	NP-VTK2	—		2.5	3.6	4.5	
	NP-VTC2	—		3.2	4.5	5.6	
Color Difference Output (Rainbow Color Bar)	3NeB-Y	—	(Note) C <sub>12</sub>	320	380	460	times
	3NeR-Y	—		240	290	350	
	4NeB-Y	—		320	380	460	
	4NeR-Y	—		240	290	350	
	4PeB-Y	—		360	430	520	
	4PeR-Y	—		200	240	290	
(75% Color Bar)	4Peb-y	—		540	650	780	°
	4Per-y	—		430	510	610	
Demodulation Relative Amplitude	3NGR / B	—	(Note) C <sub>13</sub>	0.69	0.77	0.86	times
	4NGR / B	—		0.70	0.77	0.85	
	4PGR / B	—		0.49	0.56	0.64	
Demodulation Relative Phase	3NθR-B	—	(Note) C <sub>14</sub>	85	93	100	°
	4NθR-B	—		87	93	99	
	4PθR-B	—		85	90	95	
Demodulation Output Residual Carrier	3N-SCB	—	(Note) C <sub>15</sub>	0	5	15	mV <sub>p-p</sub>
	3N-SCR	—					
	4N-SCB	—					
	4N-SCR	—					

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Demodulation Output Residual Higher Harmonic	3N-HCB	—	(Note) C16	0	10	30	mV <sub>p-p</sub>
	3N-HCR	—					
	4N-HCB	—					
	4N-HCR	—					
Color Difference Output ATT Check	B-Y - 1dB	—	(Note) C17	-1.20	-0.9	-0.60	dB
	B-Y - 2dB	—		-2.30	-1.7	-1.55	
	B-Y + 1dB	—		0.60	0.8	1.20	
16.2MHz Oscillation Frequency	Δf <sub>OF</sub>	—	(Note) C18	-2.0	0	2.0	kHz
16.2MHz Oscillation Start Voltage	V <sub>Fon1</sub>	—	(Note) C19	3.0	3.2	3.4	V
$f_{sc}$ Free-Run Frequency (3.58M)	3fr	—	(Note) C20	-100	50	200	Hz
	(4.43M)	—		-125	25	175	
	(M-PAL)	Mfr		-140	10	160	
	(N-PAL)	Nfr					
$f_{sc}$ Output Amplitude	4.43e27	—	(Note) C21	420	500	580	mV <sub>p-p</sub>
	3.58e27	—					
$f_{sc}$ Output DC Voltage	3.58eV27	—	—	2.6	2.9	3.2	V
	0th V27	—		1.6	1.9	2.2	

## DEF section

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
H. Reference Frequency	FHVCO	—	(Note) DH1	5.95	6.0	6.10	MHz
H. Reference Oscillation Start Voltage	VSHVCO	—	(Note) DH2	2.3	2.6	2.9	V
H. Output Frequency 1	fH1	—	(Note) DH3	15.5	15.625	15.72	kHz
H. Output Frequency 2	fH2	—	(Note) DH4	15.62	15.734	15.84	
H. Output Duty 1	H $\phi$ 1	—	(Note) DH5	39	41	43	%
H. Output Duty 2	H $\phi$ 2	—	(Note) DH6	35	37	39	
H. Output Duty Switching Voltage 1	V5-1	—	(Note) DH7	1.2	1.5	1.8	V
H. Output Voltage	VHH	—	(Note) DH8	4.5	5.0	5.5	
	VHL	—		—	—	0.5	
H. Output Oscillation Start Voltage	VHS	—	(Note) DH9	—	5.0	—	
H. FBP Phase	$\phi$ FBP	—	(Note) DH10	6.2	6.9	7.6	$\mu$ s
H. Picture Position, Maximum	HSFTmax	—	(Note) DH11	17.7	18.4	19.1	
H. Picture Position, Minimum	HSFTmin	—	(Note) DH12	12.4	13.1	13.8	
H. Picture Position Control Range	ΔHSFT	—	(Note) DH13	4.5	5.3	6.1	

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
H. Distortion Correction Control Range	$\Delta HCC$	—	(Note) DH14	0.5	1.0	1.5	$\mu s/V$
H. BLK Phase	$\phi BLK$	—	(Note) DH15	6.2	6.9	7.6	$\mu s$
H. BLK Width, Minimum	BLKmin	—	(Note) DH16	9.8	10.5	11.3	
H. BLK Width, Maximum	BLKmax	—	(Note) DH17	13.2	14.0	14.7	
P / N-GP Start Phase 1	SPGP1	—	(Note) DH18	3.45	3.68	3.90	
P / N-GP Start Phase 2	SPGP2	—	(Note) DH19	3.95	4.18	4.40	
P / N-GP Gate Width 1	PGPW1	—	(Note) DH20	1.65	1.75	1.85	
P / N-GP Gate Width 2	PGPW2	—	(Note) DH21	1.70	1.75	1.85	
SECAM-GP Start Phase 1	SSGP1	—	(Note) DH22	5.2	5.4	5.6	
SECAM-GP Start Phase 2	SSGP2	—	(Note) DH23	5.7	6.0	6.2	
SECAM-GP Gate Width 1	SGPW1	—	(Note) DH24	1.9	2.0	2.1	
SECAM-GP Gate Width 2	SGPW2	—	(Note) DH25	1.9	2.0	2.1	
Noise Detection Level 1	NL1	—	(Note) DH26	0.15	0.2	0.25	$V$
Noise Detection Level 2	NL2	—	(Note) DH27	0.1	0.18	0.26	
Noise Detection Level 3	NL3	—	(Note) DH28	0.1	0.15	0.2	
Noise Detection Level 4	NL4	—	(Note) DH29	0.08	0.13	0.2	
V. Ramp Amplitude	Vramp	—	(Note) DV1	1.62	2.0	2.08	$V_{p-p}$
V. NF Maximum Amplitude	VNFmax	—	(Note) DV2	3.2	3.5	3.8	
V. NF Minimum Amplitude	VNFmin	—	(Note) DV3	0.8	1.0	1.2	
V. Amplification Degree	GVA	—	(Note) DV4	20	26	32	$dB$
V. Amplifier Max. Output	Vvmax	—	(Note) DV5	5.0	—	—	$V$
V. Amplifier Min. Output	Vvmin	—	(Note) DV6	0	—	1.5	
V. S-Curve Correction, Max. Correction Quantity	Vs	—	(Note) DV7	9	11	13	$\%$
V. Reverse S-Curve Correction, Max. Correction Quantity	Vsr	—	(Note) DV8				
V. Linearity Max. Correction Quantity	VL	—	(Note) DV9	9	20	31	

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
AFC-MASK Start Phase	$\phi$ AFCf	—	(Note) DV10	2.6	3.2	3.8	H	
AFC-MASK Stop Phase	$\phi$ AFCe	—	(Note) DV11	4.4	5.0	5.6		
VNFB phase	$\phi$ VNFB	—	(Note) DV12	0.45	0.75	1.05		
V. Output Maximum Phase	$V\phi$ max	—	(Note) DV13	7.3	8.0	8.7		
V. Output Minimum Phase	$V\phi$ min	—	(Note) DV14	0.5	1.0	1.5		
V. Output Phase Variable Range	$\Delta V\phi$	—	(Note) DV15	6.3	7.0	7.7		
50 System VBLK Start Phase	V50BLKf	—	(Note) DV16	0.4	0.55	0.7		
50 System VBLK Stop Phase	V50BLKe	—	(Note) DV17	20	23	26		
60 System VBLK Start Phase	V60BLKf	—	(Note) DV18	0.4	0.55	0.7		
60 System VBLK Stop Phase	V60BLKe	—	(Note) DV19	15	18	21		
Pin 56 VBLK Max Voltage	V56H	—		4.7	5.0	5.3	V	
Pin 56 VBLK Min Voltage	V56L	—		0	—	0.3		
V. Lead-In Range 1	VAcaL	—	(Note) DV20	—	232.5	—	Hz	
	VAcaH	—		—	344.5	—		
V. Lead-In Range 2	V60caL	—	(Note) DV21	—	232.5	—		
	V60caH	—		—	294.5	—		
W-VBLK Start Phase	SWVB	—	(Note) DV22	9	—	88	H	
W-PMUTE Start Phase	SWP	—	(Note) DV23					
W-VBLK Stop Phase	STWVB	—	(Note) DV24	10	—	120		
W-PMUTE Stop Phase	STWP	—	(Note) DV25					
V Centering Center Voltage	V51	—	(Note) DV26		4.55		V	
V Centering Max Voltage	V51Max	—	(Note) DV27		6.30			
V Centering Min Voltage	V51Min	—	(Note) DV28		2.75			
Pin 28 DAC Output Voltage (High)	V28H	—		4.0	4.5	5.0		
Pin 28 DAC Output Voltage (Low)	V28L	—		—	0	0.1		

## 1H DL section

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
1HDL Dynamic Range, Direct	VNBD	—	(Note) H <sub>1</sub>	0.8	1.2	—	V	
	VNRD	—						
1HDL Dynamic Range, Delay	VPBD	—	(Note) H <sub>2</sub>	0.8	1.2	—		
	VPRD	—						
1HDL Dynamic Range, Direct + Delay	VSBD	—	(Note) H <sub>3</sub>	0.9	1.2	—		
	VSRD	—						
Frequency Characteristic, Direct	GHB1	—	(Note) H <sub>4</sub>	-3.0	-2.0	0.5	dB	
	GHR1	—						
Frequency Characteristic, Delay	GHB2	—	(Note) H <sub>5</sub>	-8.2	-6.5	-4.3		
	GHR2	—						
AC Gain, Direct	GBY1	—	(Note) H <sub>6</sub>	-2.0	-0.5	2.0		
	GRY1	—						
AC Gain, Delay	GBY2	—	(Note) H <sub>7</sub>	-2.4	-0.5	1.1		
	GRY2	—						
Direct-Delay AC Gain Difference	GBYD	—	(Note) H <sub>8</sub>	-1.0	0.0	1.0		
	GRYD	—						
Color Difference Output DC Stepping	VBD	—	(Note) H <sub>9</sub>	-5	0.0	5	mV	
	VRD	—						
1H Delay Quantity	BDt	—	(Note) H <sub>10</sub>	63.7	64.0	64.4	μs	
	RDt	—						
Color Difference Output	Bomin	—	(Note) H <sub>11</sub>	22	36	55	mV	
DC-Offset Control	Bomax	—		-55	-36	-22		
Bus-Min Data	Romin	—		22	36	55		
Bus-Max Data	Romax	—		-55	-36	-22		
Color Difference Output DC-Offset Control / Min. Control Quantity	Bo1	—	(Note) H <sub>12</sub>	1	4	8		
	Ro1	—						
NTSC Mode Gain / NTSC-COM Gain	GNB	—	(Note) H <sub>13</sub>	-0.90	0	1.20	dB	
	GNR	—		0.92	0	1.58		

## Text section

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Y Color Difference Clamping Voltage	Vcp31	—	(Note) T <sub>1</sub>	1.7	2.0	2.3	V
	Vcp33	—		2.2	2.5	2.8	
	Vcp34	—					
Contrast Control Characteristic	Vc12mx	—	(Note) T <sub>2</sub>	2.50	3.00	3.50	
	Vc12mn	—		0.21	0.31	0.47	
	D12c80	—		0.83	1.24	1.86	
	Vc13mx	—		2.50	3.00	3.50	
	Vc13mn	—		0.21	0.31	0.47	
	D13c80	—		0.83	1.24	1.86	
	Vc14mx	—		2.50	3.00	3.50	
	Vc14mn	—		0.21	0.31	0.47	
	D14c80	—		0.83	1.24	1.86	
AC Gain	Gr	—	(Note) T <sub>3</sub>				times
	Gg	—		2.8	4.0	5.2	
	Gb	—					
Frequency Characteristic	Gf	—	(Note) T <sub>4</sub>	—	-1.0	-3.0	dB
Y Sub-Contrast Control Characteristic	ΔVscnt	—	(Note) T <sub>5</sub>	3.0	6.0	9.0	V
Y <sub>2</sub> Input Range	Vy2d	—	(Note) T <sub>6</sub>	0.7	—	—	
Unicolor Control Characteristic	Vn12mx	—	(Note) T <sub>7</sub>	1.6	2.3	4.3	
	Vn12mn	—		0.17	0.35	0.42	
	D12n80	—		0.67	1.16	1.68	
	Vn13mx	—		1.6	2.3	4.3	
	Vn13mn	—		0.17	0.35	0.42	
	D13n80	—		0.67	1.16	1.68	
	Vn14mx	—		1.6	2.3	4.3	
	Vn14mn	—		0.17	0.26	0.42	
	D14n80	—		0.67	1.16	1.68	
	ΔV13un	—		16	20	24	dB
Relative Amplitude (NTSC)	Mnr-b	—	(Note) T <sub>8</sub>	0.70	0.77	0.85	times
	Mng-b	—		0.30	0.34	0.38	
Relative Phase (NTSC)	θnr-b	—	(Note) T <sub>9</sub>	87	93	99	°
	θng-b	—		235	241.5	248	
Relative Amplitude (PAL)	Mpr-b	—	(Note) T <sub>10</sub>	0.50	0.56	0.63	times
	Mpg-b	—		0.30	0.34	0.38	
Relative Phase (PAL)	θpr-b	—	(Note) T <sub>11</sub>	86	90	94	°
	θpg-b	—		232	237	242	

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Color Control Characteristic	Vcmx	—	(Note) T12	1.50	1.80	2.10	V <sub>p-p</sub>
	e <sub>col</sub>	—		80	128	160	step
	Δ <sub>col</sub>	—		142	192	242	
Color Control Characteristic, Residual Color	e <sub>cr</sub>	—	(Note) T13	0	12.5	25	mV <sub>p-p</sub>
	e <sub>cg</sub>	—					
	e <sub>cb</sub>	—					
Chroma Input Range	V <sub>cr</sub>	—	(Note) T14	700	—	—	
Brightness Control Characteristic	V <sub>brmx</sub>	—	(Note) T15	3.05	3.45	3.85	V
	V <sub>brmn</sub>	—		1.05	1.35	1.65	
Brightness Center Voltage	V <sub>bcnt</sub>	—	(Note) T16	2.05	2.30	2.55	
Brightness Data Sensitivity	ΔV <sub>brt</sub>	—	(Note) T17	6.3	7.8	9.4	
RGB Output Voltage Axes Difference	ΔV <sub>bct</sub>	—	(Note) T18	-150	0	150	mV
White Peak Limit Level	V <sub>wpl</sub>	—	(Note) T19	2.63	3.25	3.75	V
Cutoff Control Characteristic	V <sub>comx</sub>	—	(Note) T20	2.55	2.75	2.95	
	V <sub>comm</sub>	—		1.55	1.75	1.95	
Cutoff Center Level	V <sub>coct</sub>	—	(Note) T21	2.05	2.3	2.55	
Cutoff Variable Range	ΔD <sub>cut</sub>	—	(Note) T22	2.3	3.9	5.5	mV
Drive Variable Range	DR +	—	(Note) T23	2.7	3.85	5.0	dB
	DR -	—		-6.5	-5.6	-4.7	
DC Regeneration	T <sub>DC</sub>	—	(Note) T24	0	50	100	mV
RGB Output S/N Ratio	S <sub>No</sub>	—	(Note) T25	—	-50	-45	dB
Blanking Pulse Output Level	V <sub>v</sub>	—	(Note) T26	0.7	1.0	1.3	V
	V <sub>h</sub>	—					
Blanking Pulse Delay Time	t <sub>don</sub>	—	(Note) T27	0.05	0.25	0.45	μs
	t <sub>doff</sub>	—		0.05	0.35	0.85	
RGB Min. Output Level	V <sub>mn</sub>	—	(Note) T28	0.8	1.0	1.2	V
RGB Max. Output Level	V <sub>mx</sub>	—	(Note) T29	6.85	7.15	7.45	
Halftone Ys Level	V <sub>thtl</sub>	—	(Note) T30	0.7	0.9	1.1	
Halftone Gain 1	G <sub>3htl3</sub>	—	(Note) T31	-4.5	-3.0	-1.5	
Halftone Gain 2	G <sub>6htl3</sub>	—	(Note) T32	-7.5	-6.0	-4.5	dB
Text ON Ys Level	V <sub>txxl</sub>	—	(Note) T33	1.8	2.0	2.2	V
Text / OSD Output, Low Level	V <sub>txl13</sub>	—	(Note) T34	-0.45	-0.25	-0.05	
Text RGB Output, High Level	V <sub>m13</sub>	—	(Note) T35	1.15	1.4	1.85	
OSD Ys ON Level	V <sub>tosl</sub>	—	(Note) T36	2.8	3.0	3.2	
OSD RGB Output, High Level	V <sub>mos13</sub>	—	(Note) T37	1.75	2.15	2.55	
Text Input Threshold Level	V <sub>txtg</sub>	—	(Note) T38	0.7	1.0	1.3	
OSD Input Threshold Level	V <sub>osdg</sub>	—	(Note) T39	1.7	2.0	2.3	

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
OSD Mode Switching Rise-Up Time	$\tau_{Rosr}$	—	(Note) T40	—	40	100	ns
	$\tau_{Rosg}$	—					
	$\tau_{Rosb}$	—					
OSD Mode Switching Rise-Up Transfer Time	$t_{PRosr}$	—	(Note) T41	—	40	100	ns
	$t_{PRosg}$	—					
	$t_{PRosb}$	—					
OSD Mode Switching Rise-Up Transfer Time, 3 Axes Difference	$\Delta t_{PRos}$	—	(Note) T42	—	15	40	ns
OSD Mode Switching Breaking Time	$\tau_{Fosr}$	—	(Note) T43	—	30	100	ns
	$\tau_{Fosg}$	—					
	$\tau_{Fosb}$	—					
OSD Mode Switching Breaking Transfer Time	$t_{PFosr}$	—	(Note) T44	—	30	100	ns
	$t_{PFosg}$	—					
	$t_{PFosb}$	—					
OSD Mode Switching Breaking Transfer Time, 3 Axes Difference	$\Delta t_{Fos}$	—	(Note) T45	—	20	40	ns
OSD Hi DC Switching Rise-Up Time	$\tau_{Roshr}$	—	(Note) T46	—	20	100	ns
	$\tau_{Roshg}$	—					
	$\tau_{Roshb}$	—					
OSD Hi DC Switching Rise-Up Transfer Time	$t_{PRohr}$	—	(Note) T47	—	20	100	ns
	$t_{PRohg}$	—					
	$t_{PRohb}$	—					
OSD Hi DC Switching Rise-Up Transfer Time, 3 Axes Difference	$\Delta t_{PRoh}$	—	(Note) T48	—	0	40	ns
OSD Hi DC Switching Breaking Time	$\tau_{Foshr}$	—	(Note) T49	—	20	100	ns
	$\tau_{Foshg}$	—					
	$\tau_{Foshb}$	—					
OSD Hi DC Switching Breaking Transfer Time	$t_{PFohr}$	—	(Note) T50	—	20	100	ns
	$t_{PFohg}$	—					
	$t_{PFohb}$	—					
OSD Hi DC Switching Breaking Transfer Time, 3 Axes Difference	$\Delta t_{PFoh}$	—	(Note) T51	—	0	40	ns

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
RGB Contrast Control Characteristic	Vc12mx	—	(Note) T <sub>52</sub>	2.10	2.5	2.97	V
	Vc12mn	—		0.21	0.31	0.47	
	D12c80	—		0.84	1.25	1.87	
	Vc13mx	—		2.10	2.5	2.97	
	Vc13mn	—		0.21	0.31	0.47	
	D13c80	—		0.84	1.25	1.87	
	Vc14mx	—		2.10	2.5	2.97	
	Vc14mn	—		0.21	0.31	0.47	
	D14c80	—		0.84	1.25	1.87	
Analog RGB AC Gain	G <sub>ag</sub>	—	(Note) T <sub>53</sub>	4.0	5.1	6.3	times
Analog RGB Frequency Characteristic	G <sub>fg</sub>	—	(Note) T <sub>54</sub>	-0.5	-1.75	-3.0	dB
Analog RGB Dynamic Range	D <sub>r24</sub>	—	(Note) T <sub>55</sub>	0.5	—	—	V
RGB Brightness Control Characteristic	V <sub>brmxg</sub>	—	(Note) T <sub>56</sub>	3.05	3.25	3.45	
	V <sub>brmng</sub>	—		1.05	1.25	1.45	
RGB Brightness Center Voltage	V <sub>bcntg</sub>	—	(Note) T <sub>57</sub>	2.05	2.25	2.45	
RGB Brightness Data Sensitivity	ΔV <sub>brtg</sub>	—	(Note) T <sub>58</sub>	6.3	7.8	9.4	mV
Analog RGB Mode ON Voltage	V <sub>aonath</sub>	—	(Note) T <sub>59</sub>	0.8	1.0	1.2	V
Analog RGB Switching Rise-Up Time	τ <sub>Ranr</sub>	—	(Note) T <sub>60</sub>	—	50	100	ns
	τ <sub>Rang</sub>	—		—	20	100	
	τ <sub>Ranb</sub>	—		—	0	40	
Analog RGB Switching Rise-Up Transfer Time	t <sub>PRanr</sub>	—	(Note) T <sub>61</sub>	—	50	100	
	t <sub>PRang</sub>	—		—	30	100	
	t <sub>PRanb</sub>	—		—	0	40	
Analog RGB Switching Rise-Up Transfer Time, 3 Axes Difference	Δt <sub>PRas</sub>	—	(Note) T <sub>62</sub>	—	50	100	
Analog RGB Switching Breaking Time	τ <sub>Fanr</sub>	—	(Note) T <sub>63</sub>	—	30	100	
	τ <sub>Fang</sub>	—		—	20	100	
	τ <sub>Fanb</sub>	—		—	0	40	
Analog RGB Switching Breaking Transfer Time	t <sub>PFanr</sub>	—	(Note) T <sub>64</sub>	—	50	100	
	t <sub>PFang</sub>	—		—	30	100	
	t <sub>PFanb</sub>	—		—	0	40	
Analog RGB Switching Breaking Transfer Time, 3 Axes Difference	Δt <sub>PFas</sub>	—	(Note) T <sub>65</sub>	—	50	100	


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Analog RGB Hi Switching Rise-Up Time	$\tau_{Ranhr}$	—	(Note) T <sub>66</sub>	—	50	100	ns
	$\tau_{Ranhg}$	—					
	$\tau_{Ranhb}$	—					
Analog RGB Hi Switching Rise-Up Transfer Time	$t_{PRahr}$	—	(Note) T <sub>67</sub>	—	20	100	
	$t_{PRahg}$	—					
	$t_{PRahb}$	—					
Analog RGB Hi Switching Rise-Up Transfer Time, 3 Axes Difference	$\Delta t_{PRah}$	—	(Note) T <sub>68</sub>	—	0	40	
Analog RGB Hi Switching Breaking Time	$t_{Fanhr}$	—	(Note) T <sub>69</sub>	—	50	100	
	$t_{Fanhg}$	—					
	$t_{Fanhb}$	—					
Analog RGB Hi Switching Breaking Transfer Time	$t_{PFahr}$	—	(Note) T <sub>70</sub>	—	20	100	
	$t_{PFahg}$	—					
	$t_{PFahb}$	—					
Analog RGB Hi Switching Breaking Transfer Time, 3 Axes Difference	$\Delta t_{PFah}$	—	(Note) T <sub>71</sub>	—	0	40	
TV-Analog RGB Crosstalk	Crvag	—	(Note) T <sub>72</sub>	-80	-50	-40	dB
Analog RGB-TV Crosstalk	Crantg	—	(Note) T <sub>73</sub>				
ABL Point Characteristic	Vablpl	—	(Note) T <sub>74</sub>	5.5	5.6	5.7	V
	Vablpcl	—		5.7	5.8	5.9	
	Vablph	—		5.9	6.0	6.1	
ACL Characteristic	Vcal	—	(Note) T <sub>75</sub>	-19	-16	-13	dB
ABL Gain Characteristic	Vabll	—	(Note) T <sub>76</sub>	-0.3	0	0.3	V
	Vablc	—		-1.3	-1.0	-0.7	
	Vablh	—		-2.3	-2.0	-1.7	

## SECAM section

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MIN.	UNIT				
Bell Monitor Output Amplitude	embo	—	(Note) S <sub>1</sub>	200	300	400	mV <sub>p-p</sub>				
Bell Filter f <sub>O</sub>	foB-C	—	(Note) S <sub>2</sub>	-23	0	23	kHz				
Bell Filter f <sub>O</sub> Variable Range	foB-L	—	(Note) S <sub>3</sub>	-69	-46	-23					
	foB-H	—		69	92	115					
Bell Filter Q	QBEL	—	(Note) S <sub>4</sub>	14	16	18	—				
Color Difference Output Amplitude	VBS	—	(Note) S <sub>5</sub>	0.50	—	0.91	V <sub>p-p</sub>				
	VRS	—		0.39	—	0.73					
Color Difference Relative Amplitude	R / B-S	—	(Note) S <sub>6</sub>	0.70	—	0.90	—				
Color Difference Attenuation Quantity	SATTB	—	(Note) S <sub>7</sub>	-1.50	—	-0.50	dB				
	SATTR	—			—	—					
Color Difference S/N Ratio	SNB-S	—	(Note) S <sub>8</sub>	-85	—	-25	μs				
	SBR-S	—			—	—					
Linearity	LinB	—	(Note) S <sub>9</sub>	75	—	117	%				
	LinR	—		85	—	120					
Rising-Fall Time (Standard De-Emphasis)	trfB	—	(Note) S <sub>10</sub>	—	1.3	1.5	mV <sub>p-p</sub>				
	trfR	—			—	—					
Rising-Fall Time (Wide-Band De-Emphasis)	trfBw	—	(Note) S <sub>11</sub>	—	1.1	1.3	μs				
	trfRw	—			—	—					
Killer Operation Input Level (Standard Setting)	eSK	—	(Note) S <sub>12</sub>	0.5	1	2	mV <sub>p-p</sub>				
	eSC	—									
Killer Operation Input Level (VID ON)	eSFK	—	(Note) S <sub>13</sub>								
	eSFC	—									
Killer Operation Input Level (Low Sensitivity, VID OFF)	eSWK	—	(Note) S <sub>14</sub>	0.7	1.5	3					
	eSWC	—									

TEST CONDITION		TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C)										
NOTE	ITEM	SW MODE					SUB-ADDRESS & BUS DATA					MEASURING METHOD
		S39	S42	S44	S45	S51	04H	08H	0FF	10H	13H	
Y1	Y Input Pedestal Clamping Voltage	A	C	B	A	A	20H	04H	80H	00H	BAH	(1) Short circuit pin 45 (Y1 IN) in AC coupling. (2) Input synchronizing signal to pin 51 (SYNC IN). (3) Measure DC voltage at pin 45, and express the measurement result as $V_{Yclip}$ .
Y2	Chroma Trap Frequency	↑	↑	A	B	↑	↑	↑	↑	↑	↑	(1) Set the 358 TRAP mode to AUTO by setting the bus data. (2) Set the bus data so that chroma trap is ON and $f_0$ is 0. (3) Input TG7 sine wave signal whose frequency is 3.58MHz (NTSC) and video amplitude is 0.5V to pin 45 (Y1 IN). (4) While observing waveform at pin 37 (Y1out), find a frequency with minimum amplitude of the waveform. The obtained frequency shall be expressed as $f_{IR3}$ . (5) Change the frequency of the signal 1 to 4.43MHz (PAL) and perform the same measurement as the preceding step 4. The obtained frequency shall be expressed as $f_{IR4}$ .
Y3	Chroma Trap Attenuation (3.58MHz)	↑	↑	↑	↑	↑	↑	↑	↑	↑	Vari-Vari-variable able	(1) Set the 358 TRAP mode to AUTO by setting bus data. (2) Set the bus data so that Q of chroma trap is 1.5. (3) Set the bus data so that $f_0$ of chroma trap is 0. (4) Input TG7 sine wave signal whose frequency is 3.58MHz (NTSC) and video amplitude is 0.5V to pin 45 (Y1 IN). (5) While turning on and off the chroma trap by controlling the bus, measure chroma amplitude (VTon) at pin 37 (Y1out) with the chroma trap being turned on and measure chroma amplitude (VToff) at pin 37 (Y1out) with the chroma trap being turned off. $G_{IR} = 20\log(V_{Toff}/V_{Ton})$ (6) Change $f_0$ of the chroma trap to -100kHz, -50kHz, 0 and +50kHz, and perform the same measurement as the preceding steps 4 and 5 with the respective $f_0$ settings. (7) Change Q of the chroma trap to 1, 1.5, 2 and 2.5 and perform the same measurement as the preceding steps 4 through 6. The maximum $G_{IR}$ shall be expressed as $G_{IR3a}$ . (8) Set the 358 TRAP mode to the forces 358 mode by setting bus data, and perform the same measurement as the preceding steps 2 through 7 ( $G_{IR3b}$ ).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; VDD, Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25 ± 3°C)										MEASURING METHOD	
		SUB-ADDRESS & BUS DATA											
		\$39	\$42	\$44	\$45	\$51	04H	08H	0FH	10H	13H	14H	
Y4	Chroma Trap Attenuation (4.43MHz)	A	C	A	B	A	20H	04H	Vari-Vari-Vari-variable able	03H			(1) Set the 358 TRAP mode to AUTO by setting bus data. (2) Set the bus data so that Q of chroma trap is 1.5. (3) Set the bus data so that f <sub>0</sub> of chroma trap is 0. (4) Input TG7 sine wave signal whose frequency is 4.43MHz and video amplitude is 0.5V to pin 45 (Y <sub>1</sub> IN). (5) Perform the same measurement as the steps 5 through 7 of the preceding item Y <sub>3</sub> . The measurement result shall be expressed as Gtrs.
Y5	Chroma Trap Attenuation (SECAM)	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	(1) Set the bus data so that the 358 TRAP mode is AUTO and the Dtrap is ON. (2) Set the bus data so that Q of chroma trap is 1.5. (3) Set the bus data so that f <sub>0</sub> of chroma trap is 0. (4) Input SECAM signal whose amplitude in video period is 0.5V to pin 45 (Y <sub>1</sub> IN). (5) Perform the same measurement as the steps 5 through 7 of the preceding item Y <sub>3</sub> to find the maximum attenuation (Gtrs).
Y6	YY Correction Point	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	(1) Connect the power supply to pin 45 (Y <sub>1</sub> IN). (2) Turn off Y <sub>Y</sub> by setting the bus data. (3) While raising the supply voltage from the level measured in the preceding item Y <sub>1</sub> , measure voltage change characteristic of Y <sub>1</sub> output at pin 37. (4) Set the bus data to turn on Y <sub>Y</sub> . (5) Perform the same measurement as the above step 3. (6) Find a gamma ( $\gamma$ ) point from the measurement results of the steps 3 and 5. $\gamma_p = V_r \div 0.7V$
Y7	YY Correction Curve	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	From the measurement in the above item Y <sub>6</sub> , find gain of the portion that the $\gamma$ correction has an effect on.



NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , F <sub>SC</sub> V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C)										MEASURING METHOD
		SW MODE		SUB-ADDRESS & BUS DATA								
Sub-Address	S39	S42	S44	S45	S51	04H	08H	0FH	10H	13H	14H	
Y8 APL Terminal Output Impedance	A	C	B	A	A	20H	04H	80H	00H	BAH	03H	(1) Short circuit pin 45 (Y1 IN) in AC coupling. (2) Input synchronizing signal to pin 51. (3) Connect power supply and an ammeter to the APL of pin 44 as shown in the figure, and adjust the power supply so that the ammeter reads 0 (zero). (4) Raise the voltage at pin 44 by 0.1V, and measure the current (lin) at that time. $Z_{044} (\Omega) = 0.1V \div \text{lin (A)}$
Y9 DC Transmission Compensation Amplifier Gain	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	Vari- able	(1) Set the bus data so that DC transmission factor correction gain is maximum. (2) In the condition of the Note Y8, observe Y1 out waveform at pin 37 and measure voltage change in the video period. (3) Set the bus data so that DC transmission factor correction gain is centered, and measure voltage in the same manner as the above step 2.
Y10 Maximum Gain of Black Expansion Amplifier	↑	↑	A	B	↑	↑	↑	↑	↑	↑		Pin 19 waveform  $\Delta V = (\Delta V_2 - \Delta V_1) \div 0.1V + Y_1 \text{ gain}$
												(1) Set the bus data so that black expansion is on and black expansion point is maximum. (2) Input TG7 sine wave signal whose frequency is 500kHz and video amplitude is 0.1V to pin 45 (Y1 IN). (3) While impressing 1.0V to pin 39 (Black Peak Hold), measure amplitude (Va) of Y1 out signal at pin 37. (4) While impressing 3.5V to pin 39 (Black Peak Hold), measure amplitude (Vb) of Y1 out signal at pin 37. $A_{kC} = Va \div Vb$

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>D</sub> , Fsc V <sub>DD</sub> , Y / C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C)											
		SW MODE		SUB-ADDRESS & BUS DATA				MEASURING METHOD					
		\$39	\$42	\$44	\$45	\$51	04H	08H	0FH	10H	13H	14H	
Y11	Black Expansion Start Point	A	C	A	A	A	20H	04H	00H	BAH	Vari-		
Y12	Black Peak Detection Period (Horizontal)	B		↑	↑	↑	↑	↑	↑	↑	↑	↑	E3H
	Black Peak Detection Period (Vertical)												TbpV

(1) Set the bus data so that black expansion is on and black expansion point is maximum.

(2) Supply 1.0V to pin 39 (Black Peak Hold).

(3) Supply 2.9V to the APL of pin 44.

(4) Connect the power supply to pin 45 (Y1 IN). While raising the supply voltage from the level measured in the preceding item Y<sub>11</sub>, measure voltage change at pin 37 (Y<sub>1out</sub>).

(5) Set the bus data to center the black expansion point, and perform the same measurement as the above steps 2 through 4.

(6) Set the black expansion point to the minimum by setting the bus data, and perform the same measurement as the above steps 2 through 4.


(7) While supplying 2.2V to the APL of pin 44, perform the same measurement as the above step 4 with the black expansion point set to maximum, center and minimum.


In the condition of the Note Y<sub>11</sub>, measure waveform at pin 39 (Black Peak Hold).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C)									
		SV MODE		SUB-ADDRESS & BUS DATA		MEASURING METHOD					
S39	S42	S44	S45	S51	04H	08H	0FH	10H	13H	14H	
Y13 Picture Quality Control Peaking Frequency	A C A B A										(1) Set the bus data so that picture quality control frequency is 2.5MHz. (2) Input TG7 sine wave (sweeper) signal whose video level is 0.1V to pin 45 (Y <sub>1</sub> IN) and pin 51 (Sync. IN). (3) Maximize the picture quality control data. (4) While observing Y <sub>1</sub> out of pin 37, find an SG frequency as the waveform amplitude is maximum (fp25). (5) Set the bus data so that picture quality control frequency is 3.1MHz and 4.2MHz, and perform the same measurement as the above steps 2 through 4 at the respective frequencies (fp31, fp42).
Y14 Picture Quality Control Maximum Characteristic	↑ ↑ ↑ ↑ ↑										(1) Input TG7 sine wave (sweeper) signal whose video level is 0.1V to pin 45 (Y <sub>1</sub> IN) and pin 51 (Sync. IN). (2) Set the picture quality control data to maximum. (3) Set the picture quality control frequency is 2.5MHz by setting the bus data. (4) Measure amplitude (V100k) of the output of pin 37 (Y <sub>1</sub> OUT) as the SG frequency is 100kHz, and the amplitude (Vp25) of the same as the SG frequency is 2.5MHz. GS25MX = 20log (Vp25 / V100k) (5) Set the picture quality control frequency data to 3.1MHz by setting the bus data. (6) Measure amplitude (V100k) of the output of pin 37 (Y <sub>1</sub> OUT) as the SG frequency is 100kHz, and the amplitude (Vp31) of the same as the SG frequency is 3.1MHz. GS31MX = 20log (Vp31 / V100k) (7) Set the picture quality control frequency to 4.2MHz by setting the bus data. (8) Measure amplitude (V100k) of the output of pin 37 (Y <sub>1</sub> OUT) as the SG frequency is 100kHz, and the amplitude (Vp42) of the same as the SG frequency is 4.2MHz. GS42MX = 20log (Vp42 / V100k)




NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , F <sub>SC</sub> V <sub>DD</sub> , Y / C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C)													
		SV MODE		SUB-ADDRESS & BUS DATA		MEASURING METHOD									
S39	S42	S44	S45	S51	04H	08H	0FH	10H	13H	14H					
Y19 Y Signal Maximum Input Range	A C A B A	A C A B A	B A B A A	20H 04H 80H 00H BAH	04H 08H 00H 00H 03H	0AH 0AH BAH BAH 03H	(1) Set the bus data so that black expansion is off, picture quality control is off and DC transmission compensation is minimum. (2) Input TG7 sine wave signal whose frequency is 100kHz to pin 45 (Y <sub>1</sub> IN) and pin 51 (Sync. IN). (3) While increasing the amplitude V <sub>yd</sub> of the signal in the video period, measure V <sub>yd</sub> just before the waveform of Y <sub>1</sub> output (pin 37) is distorted.								



CHROMA SECTION		TEST CONDITION (unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , F <sub>SC</sub> V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C)										
NOTE	ITEM	SW MODE										MEASURING METHOD
		S26	S1	S31	S33	S34	S39	S42	S44	S45	S51	
C1	ACC Characteristic	ON	A	B	B	B	A	A	A	A	B	(1) Activate the test mode (S26-ON, Sub Add 02 ; 01h). (2) Set as follows : band pass filter Q = 2, f <sub>0</sub> = 600kHz, crystal clock = conforming to European, Asian system. (3) Set the gate to the normal status. (4) Input 3N rainbow color bar signal to pin 42 (Chroma IN). (5) When input signal to pin 42 is the same in the burst and chroma levels (10mV p-p), burst amplitude of B-Y output signal from pin 36 is expressed as eAT. When the level of input signal to pin 42 is 100mVpp or 300mVpp, burst amplitude of the B-Y output signal is expressed as F1T or F2T. The ratio between F1T and F2T is expressed as AT. F2T/F1T = AT (6) Perform the same measurement in the EXT. mode (f <sub>0</sub> = 0). (eAE, F1E, AE)
												 Pin 36 B-Y burst amplitude eAT F1T F2T  Pin 42 Chroma burst
												(7) Input 4N rainbow color bar signal to pin 42 (Chroma IN), and perform the same measurement as the above-mentioned steps with 3N rainbow color bar signal input.

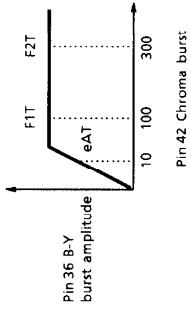

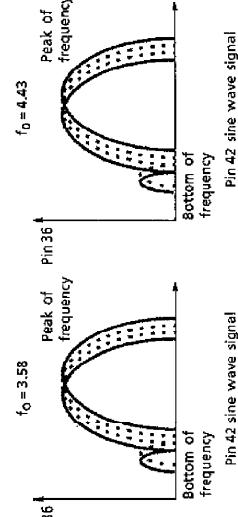
(7) Input 4N rainbow color bar signal to pin 42 (Chroma IN), and perform the same measurement as the above-mentioned steps with 3N rainbow color bar signal input

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : $H_r$ , RGB $V_{CC} = 9V$ ; $V_{DDr}$ , $F_{sc}$ $V_{DD}$ , $Y/C$ $V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ )							MEASURING METHOD		
		S26	S1	S31	S33	S34	S39	S42	S44	S45	S51
											(1) Activate the test mode (S26-ON, Sub Add 02 ; 01h). (2) Set as follows : band pass filter Q = 2, crystal clock = conforming to 3.579 / 4.43MHz, gate = normal status. (3) Input 3N composite sine wave signal ( $IV_{p-p}$ ) to pin 42 (Chroma IN). (4) Measure frequency characteristic of B-Y output of pin 36 and measure the peak frequency, too. (5) Changing $f_0$ to 0, 500, 600 and 700 by the bus control and measure peak frequencies respectively with different $f_0$ . (6) For measuring frequency characteristic as $f_0$ is 4.43, use 4.43MHz crystal clock. Measure the following items in the same manner.
C <sub>2</sub>	Band Pass Filter Characteristic	ON	A	B	B	A	B	A	A	B	

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB VCC = 9V ; VDD, Fsc VDD, Y/C VCC = 5V ; Ta = 25 ± 3°C)										MEASURING METHOD
		S26	S1	S31	S33	S34	S39	S42	S44	S45	S51	
C <sub>3</sub>	Band Pass Filter, -3dB Band Characteristic	ON	A	B	B	B	A	B	A	A	B	(1) Activate the test mode (S26-ON, Sub Add 02 ; 01h). (2) Set as follows : band pass filter Q = 2, crystal clock = conforming to 3.579 / 4.43MHz. (3) Set the gate to the normal status. (4) Input 3N composite sine wave signal (1V <sub>p-p</sub> ) to pin 42 (Chroma IN). (5) Measure frequency characteristic of B-Y output of pin 36, and measure peak frequency in the -3dB band. (6) Changing f <sub>o</sub> to 0, 500, 600 and 700 by the bus control and measure peak frequencies in the -3dB band respectively with different f <sub>o</sub> .
C <sub>4</sub>	Band Pass Filter, Q Characteristic Check											(1) Activate the test mode (S26-ON, Sub Add 02 ; 01h). (2) Set as follows : TV mode (f <sub>o</sub> = 600), Crystal mode = conforming to 3.579 / 4.43MHz, gate = normal status. (3) Input 3N composite sine wave signal (1V <sub>p-p</sub> ) to pin 42 (Chroma IN). (4) Measure frequency characteristic of B-Y output of pin 36, and measure peak frequency in the -3dB band. (5) Changing f <sub>o</sub> of the band pass filter to 0, 500, 600 and 700 by the bus control and measure peak frequencies in the -3dB band respectively with different f <sub>o</sub> .

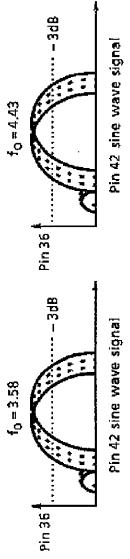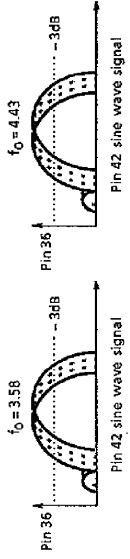

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB VCC = 9V ; VDD, Fsc VDD / Y/C VCC = 5V ; Ta = 25 ± 3°C)							MEASURING METHOD	
		S26	S1	S31	S33	S34	S39	S42	S44	
C5	1/2 $f_0$ Trap Characteristic	ON	A	B	B	A	B	A	B	(1) Activate the test mode (S26-ON, Sub Add 02 : 01h). (2) Set as follows : band pass filter Q = 2, crystal clock = conforming to 3.579 / 4.43MHz, gate = normal status. (3) Input 3N composite sine wave signal (1Vp-p) to pin 42 (Chroma IN). (4) Measure frequency characteristic of B-Y output of pin 36, and measure bottom frequency. (5) Changing $f_0$ to 0, 500, 600 and 700 by the bus control and measure bottom frequencies respectively with different $f_0$ .

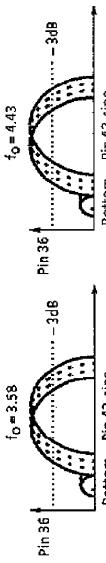

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB VCC = 9V ; VDD, Fsc VDD, Y / C VCC = 5V ; Ta = 25 ± 3°C)							MEASURING METHOD	
		S26	S1	S31	S33	S34	S39	S42	S44	
C6	Tint Control Shading Range ( $f_0 = 600\text{kHz}$ )	ON	A	B	B	A	A	A	A	B
C7	Tint Control Variable Range ( $f_0 = 600\text{kHz}$ )									
C8	Tint Control Characteristic									

(1) Activate the test mode (S26-ON, Sub Add 02 ; 08h).

(2) Connect band pass filter ( $Q = 2$ ), set crystal mode to conform to European, Asian system and set the gate to normal status.

(3) Input 3N rainbow color bar signal (100mVp-p) to pin 42 (Chroma IN).

(4) Measure phase shift of B-Y color difference output of pin 36.

(5) While shifting color phase (tint) from minimum to maximum by the bus control, measure phase change of B-Y color difference output of pin 36. On the condition that 6 bars in the center have the peak level (regarded as center of color phase), the side of 5 bars is regarded as positive direction while the side of 7 bars is regarded as negative direction when the 5 bars or the 7 bars are in the peak level. Based on this assumption, open angle toward the positive direction is expressed as  $\Delta\theta_1$  and that toward the negative direction is expressed as  $\Delta\theta_2$  as viewed from the phase center.  $\Delta\theta_1$  and  $\Delta\theta_2$  show the tint control sharing range.

(6) Variable range is expressed by sum of  $\Delta\theta_1$  and  $\Delta\theta_2$ .

$\Delta\theta_T = \Delta\theta_1 + \Delta\theta_2$

(7) While shifting color phase from minimum to maximum with the bus control, measure phase shift of B-Y color difference output of pin 36. When center 6 bars have peak level, value of color phase bus step is expressed as  $\theta_{Tin}$ .

(8) While shifting color phase from minimum to maximum with the bus control, measure values of color phase bus step corresponding to 10% and 90% of absolutely variable phase shift of B-Y color difference output of pin 36. The range of color phase shifted by the bus control is expressed as While shifting color phase from minimum to maximum with the bus control, measure phase shift of B-Y color difference output of pin 36. When center 6 bars have peak level, value of color phase bus step is expressed as  $\Delta\theta_{Tin}$  ( $f_o = 600\text{kHz}$ ).

(9) Input 4N rainbow color bar signal to pin 42 (Chroma IN), and perform the same measurement as the 3N signal.

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>D</sub> , F <sub>C</sub> V <sub>DD</sub> , Y / C V <sub>CC</sub> = 5V ; T <sub>a</sub> = 25 ± 3°C)										MEASURING METHOD
		SW MODE					S26 S1 S31 S33 S34 S39 S42 S44 S45 S51					
C9	APC Lead-In Range	OFF	A	B	B	A	A	A	A	B	(1) Connect band pass filter (Q = 2), set to TV mode ( $f_0 = 600\text{kHz}$ ) with X'tal clock conforming to European, Asian system. (2) Set the gate to normal status. (3) Input 3N CW signal of 100mV <sub>p-p</sub> to pin 42 of the chroma input terminal. (4) While changing frequency of the CW (continuous waveform) signal, measure its frequency when R-Y color difference signal of pin 36 is colored. (5) Input 4N CW (continuous waveform) 100mV <sub>p-p</sub> signal to pin 42 (Chroma IN). (6) While changing frequency of the CW signal, measure frequencies when R-Y color difference output of pin 36 is colored and discolored. Find difference between the measured frequency and $f_c$ (4.433619MHz) and express the differences as f <sub>H</sub> and f <sub>L</sub> , which show the APC lead-in range. (7) Variable frequency of VCXO is used to cope with lead-in of 3.582MHz/3.575MHz PAL system. (8) Activate the test mode (S26-ON, Sub Add 02 ; 02h). (9) Input nothing to pin 42 (Chroma IN). (10) While varying voltage of pin 30 (APC Filter), measure variable frequency of VCXO at pin 35 (R-Y OUT) while observing color and discoloring of R-Y color difference signal. Express difference between the high frequency (f <sub>H</sub> ) and f <sub>0</sub> center as 3.582HH, and difference between the low frequency (f <sub>L</sub> ) and f <sub>0</sub> center as 3.582HL. Perform the same measurement for the NP system (3.575MHz PAL).	
		ON	↑	↑	↑	↑	c	↑	↑	↑	↑	(1) Activate the test mode (S26-ON, Sub Add 02 ; 02h). (2) Connect band pass filter as same as the Note C9. (3) Change the X'tal mode properly to the system. (4) Input nothing to pin 42 (Chroma IN). (5) When V <sub>30</sub> 's APC voltage ± 50mV is impressed to pin 30 (APC Filter) while its voltage is being varied, measure frequency change of pin 35 output signal as f <sub>H</sub> or f <sub>L</sub> and calculate sensitivity according to the following equation. $b = (f_{RH} - f_{RL}) / 100$
		APC Control Sensitivity	ON	↑	↑	↑	c	↑	↑	↑	↑	

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB VCC = 9V ; VDD, Fsc VDD, Y/C VCC = 5V ; Ta = 25 ± 3°C)										MEASURING METHOD			
		SW MODE					SW MODE								
S26	S1	S31	S33	S34	S39	S42	S44	S45	S51	(1) Connect band pass filter (Q = 2) and set to TV mode ( $f_o = 600\text{kHz}$ ). (2) Set the crystal mode to conform to European, Asian system and set the gate to normal status. (3) Input 3N color signal having 200mVp-p burst to pin 42 (Chroma IN). (4) While attenuating chroma input signal, measure input burst amplitudes of the signal when B-Y color difference output of pin 36 is discolored and when the same signal is colored. Measured input burst amplitudes shall be expressed as 3N-VTK1 and 3N-VTC1 respectively (killer operation input level). (5) Killer operation input level in the condition that P/N killer sensitivity is set to LOW with the bus control is expressed as 3N-VTK2 or 3N-VTC2. (6) Perform the same measurement as the above step 4 with different inputs of 4N, 4P, MP, NP color signals having 200mVp-p burst to pin 42 (Chroma IN). (When measuring with MP / NP color signal, set the crystal system to conform to South American system.) (7) Killer operation input level at that time is expressed as follows.					
C11	Killer Operation Input Level	OFF	A	B	B	A	A	A	B	Normal killer operation input level in the 4N system is expressed as 4N-VTK1, 4N-VTC1. Normal killer operation input level in the 4P system is expressed as 4P-VTK1, 4P-VTC1. Killer operation input level with low killer sensitivity is expressed as 4P-VTK2, 4P-VTC2. Normal killer operation input level in the MP system is expressed as MP-VTK2, MP-VTC2. Normal killer operation input level in the NP system is expressed as NP-VTK1, NP-VTC1. Killer operation input level with low killer sensitivity is expressed as NP-VTK2, NP-VTC2.	[Reference] 3N system : 3.579545MHz 4N system : 4.433619MHz 4P system : 4.433619MHz MP system : 3.575611MHz NP system : 3.582056MHz	NTSC False NTSC PAL M-PAL N-PAL			

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB VCC = 9V ; VDD, Y / C VCC = 5V ; TA = 25 ± 3°C)										MEASURING METHOD
		S26	S1	S31	S33	S34	S39	S42	S44	S45	S51	
C12	Color Difference Output	ON	A	B	B	A	A	A	A	A	B	(1) Activate the test mode (S26-ON, Sub Add 02 ; 08h). (2) Connect band pass filter (Q = 2), set to TV mode ( $f_0 = 600\text{kHz}$ ) with 0dB attenuation. (3) Set the crystal mode to conform to European, Asian system and set the gate to normal status. (4) Input 3N, 4N and 4P rainbow color bar signals having 100mV <sub>p-p</sub> burst to pin 42 of the chroma input terminal one after another. (5) Measure amplitudes of color difference signals of pin 36 (B-Y) and pin 35 (R-Y) respectively, and express them as 3NeB-Y/R-Y, 4NeB-Y/R-Y and 4PeB-Y/R-Y respectively. (6) While inputting 4P 75% color bar signal (100mV <sub>p-p</sub> burst) to pin 42 of the chroma input terminal, measure amplitudes of color difference signals of pin 36 (B-Y OUT) and pin 35 (R-Y OUT) respectively. (Ratio of those amplitudes is expressed as 4PeB-y/r-y for checking color level of SECAM system.)
C13	Demodulation Relative Amplitude											(1) Activate the test mode (S26-ON, Sub Add 02 ; 08h). (2) Connect band pass filter (Q = 2), set to TV mode ( $f_0 = 600\text{kHz}$ ) with 0dB attenuation. (3) Set the crystal mode to conform to European, Asian system and set the gate to normal status. (4) Input 3N, 4N and 4P rainbow color bar signals having 100mV <sub>p-p</sub> burst to pin 42 of the chroma input terminal one after another. (5) Measure amplitudes of color difference signals of pin 36 (B-Y) and pin 35 (R-Y) respectively, and express ratio between the two amplitudes as 3NG R/B, 4NG R/B and 4PG R/B respectively. (Note) Relative amplitude of G-Y color difference signal shall be checked later in the Text section.


NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , F <sub>sc</sub> V <sub>DD</sub> , Y / C V <sub>CC</sub> = 5V ; T <sub>a</sub> = 25 ± 3°C)										MEASURING METHOD							
		SW MODE					SW MODE												
S26	S1	S31	S33	S34	S39	S42	S44	S45	S51	S26	S1	S31	S33	S34	S39	S42	S44	S45	S51
C14	Demodulation Relative Phase	ON	A	B	B	A	A	A	B	(1) Activate the test mode (S26-ON, Sub Add 02 ; 08h). (2) Connect band pass filter (Q = 2), set to TV mode ( $f_0 = 600\text{kHz}$ ) with 0dB attenuation. (3) Set the crystal mode to conform to European, Asian system and set the gate to normal status. (4) Input 3N, 4N and 4P rainbow color bar signals having 100mV <sub>p-p</sub> burst to pin 42 of the chroma input terminal one after another. (5) Measure phases of color difference signals of pin 36 (B-Y) and pin 35 (R-Y) respectively, and express them as 3NθR-B, 4NθR-B and 4PθR-B respectively. (6) For measuring with 3N and 4N color bar signals in NTSC system, set six bars of the B-Y color difference waveform to the peak level with the Tint control of pin 35 (R-Y OUT). (Note) Relative phase of G-Y color difference signal shall be checked later in the Text section.									
C15	Demodulation Output Residual Carrier	↑	↑	↑	↑	↑	↑	↑	↑	(1) Activate the test mode (S26-ON, Sub Add 02 ; 08h). (2) Connect band pass filter (Q = 2), set to TV mode ( $f_0 = 600\text{kHz}$ ) with 0dB attenuation. (3) Set the crystal mode to conform to European, Asian system. (4) Set the gate to normal status. (5) Input 3N and 4N rainbow color bar signals having 100mV <sub>p-p</sub> burst to pin 42 of the chroma input terminal one after another. (6) Measure subcarrier leak of 3N and 4N color bar signals appearing in color difference signals of pin 36 (B-Y OUT) and pin 35 (R-Y OUT) respectively, and express those leaks as 3N-SCB/R and 4N-SCB/R.									

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C)										MEASURING METHOD
		S26	S1	S31	S33	S34	S39	S42	S44	S45	S51	
C16	Demodulation Output Residual Higher Harmonic	ON	A	B	B	A	A	A	A	B		(1) Activate the test mode (S26-ON, Sub Add 02 ; 08h). (2) Connect band pass filter (Q = 2), set to TV mode ( $f_0 = 600\text{kHz}$ ) with 0dB attenuation. (3) Set the crystal mode to conform to European, Asian system and set the gate to normal status. (4) Input 3N and 4N rainbow color bar signals having 100mV <sub>p-p</sub> burst to pin 42 of the chroma input terminal one after another. (5) Measure higher harmonic ( $2f_c = 7.16\text{MHz}$ or $8.87\text{MHz}$ ) of 3N and 4N color bar signals appearing in color difference signals of pin 36 (B-Y OUT) and pin 35 (R-Y OUT) respectively, and express them as 3NHCB / R and 4NHCB / R.
C17	Color Difference Output ATT Check											(1) Activate the test mode (S26-ON, Sub Add 02 ; 08h). (2) Connect band pass filter (Q = 2) and set bus data for the TV mode ( $f_0 = 600\text{kHz}$ ). (3) Set the X'tal clock mode to conform to European, Asian system and set the gate to normal status. (4) Input 3N rainbow color bar signal whose burst is 100mV <sub>p-p</sub> to pin 42 of the chroma input terminal. (5) Measure amplitude of color difference output signal of pin 36 (B-Y OUT) with 0dB attenuation set by the bus control. Set the amplitude of the color difference output of pin 36 (B-Y OUT) to 0dB, and measure amplitude of the same signal with different attenuation of -2dB, -1dB and +1dB set by the bus control.






NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB·VCC = 9V ; VDD, Fsc VDD, Y/C VCC = 5V ; Ta = 25 ± 3°C)																
		BUS : TEST MODE						BUS : NORMAL CONTROL MODE										
		26	D5	D2	D1	D0	02H	07H	D7	D4	D3	D5	D4	D3	D2	D1	D0	OTHER CONDITION
C18	16.2MHz Oscillation Frequency	ON	0	0	1	0	0	0	0	0	0	0	0	0	0	0	—	(1) Input nothing to pin 42. (2) Measure frequency of CW signal of pin 35 as fr, and find oscillation frequency by the following equation. $\Delta foF = (fr - 0.05\text{MHz}) \times 4$
C19	16.2MHz Oscillation Start Voltage	ON	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	Impress pin 38 individually with separate power supply.
C20	f <sub>sc</sub> Free-Run Frequency	ON	0	0	1	0	0	0	0	Variable	0	0	0	0	—	—	(1) Input nothing to pin 42. (2) Change setting of SUB (10H) D <sub>4</sub> , D <sub>3</sub> and D <sub>2</sub> according to respective frequency modes, and measure frequency of CW signal of pin 35. Detail of D <sub>4</sub> , D <sub>3</sub> and D <sub>2</sub> 3.58M = 1 : (001), 4.43M = 2 : (010) M-PAL = 6 : (110), N-PAL = 7 : (111)	
C21	f <sub>sc</sub> Output Amplitude	OFF	0	0	0	0	0	0	0	0	0	↓	1	0	0	—	(1) Input nothing to pin 42. (2) Change setting of SUB (10H) D <sub>4</sub> , D <sub>3</sub> and D <sub>2</sub> according to respective frequency modes. Measure the amplitude of output signal of pin 27.	

NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD}, Fsc, V_{DD}, Y/C, V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS = preset value ; ) (Note) "x" in the data column represents preset value at power ON.									
		TEST CONDITION pin 51 input video signal=50 system									
SUB-ADDRESS & BUS DATA											
DH1	H. Reference Frequency	Sub 02H	0	0	0	0	0	0	0	1	
DH2	H. Reference Oscillation Start Voltage	Sub 02H	0	0	0	0	0	0	0	1	In the test condition of the Note DH1, turning down the voltage supplied to pin 26 from 5V, measure the voltage when oscillation of pin 49 stops.
DH3	H. Output Frequency 1	Sub 10H	x	x	x	x	x	x	0	1	(1) Set bus data as indicated on the left. (2) In the condition of the above step 1, measure frequency (TH1) at pin 4.
DH4	H. Output Frequency 2	Sub 10H	x	x	x	x	x	x	1	0	(1) Set the input video signal of pin 51 to the 60 system. (2) Set bus data as indicated on the left. (3) In the above-mentioned condition, measure frequency (TH2) at pin 4.
DH5	H. Output Duty 1	—	—	—	—	—	—	—	—	—	(1) Supply 4.5V DC to pin 5 (or, make pin 5 open-circuited). (2) Measure duty of pin 4 output.
DH6	H. Output Duty 2	—	—	—	—	—	—	—	—	—	(1) Make a short circuit between pin 5 and ground. (2) Measure duty of pin 4 output.
DH7	H. Output Duty Switching Voltage	—	—	—	—	—	—	—	—	—	Supply 2V DC to pin 5. While turning down the voltage from 2V, measure voltage when the output duty ratio becomes 41 to 37%.
DH8	H. Output Voltage	—	—	—	—	—	—	—	—	—	Measure the low voltage and high voltage of pin 4 output whose waveform is shown below.
DH9	H. Output Oscillation Start Voltage	—	—	—	—	—	—	—	—	—	While raising H. $V_{CC}$ (pin 3) from 0V, measure voltage when pin 4 starts oscillation.

DEF SECTION



NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD}, V_{FC}, V_{Y/C}, V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS = preset value ; ) (Note) "x" in the data column represents preset value at power ON.											
		TEST CONDITION pin 51 input video signal = 50 system pin 51 output video signal = 50 system											
	SUB-ADDRESS & BUS DATA	MEASURING METHOD											
DH10	H. FBP Phase												
DH11	H. Picture Position, Maximum												
DH12	H. Picture Position, Minimum	Sub 0BH	0 0 0 0 0 0 0 0 0 0 0 0 0	x x x x x x x x x x x x x x									
DH13	H. Picture Position Control Range	1 1 1 1 1 1 1 1 1 1 1 1 1											
DH14	H. Distortion Correction Control Range												

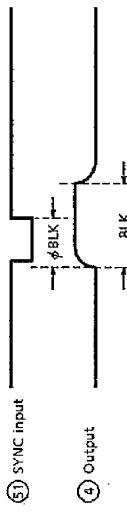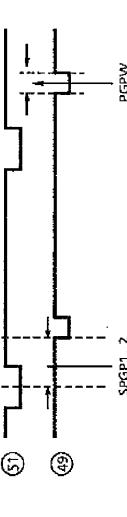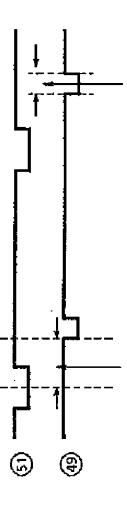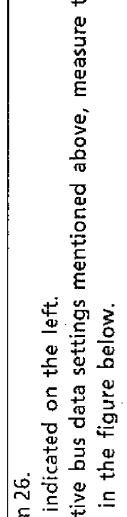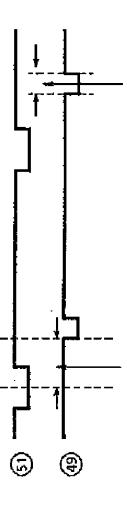NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD, Fsc} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS = preset value ; )																				
		(Note) "x" in the data column represents preset value at power ON.																				
SUB-ADDRESS & BUS DATA																						
MEASURING METHOD																						
DH15	H. BLK Phase	Sub 02H	0	0	0	0	0	1	0	0	(1) In the condition of the steps 1 through 4 of the Note DH10, perform the following measurement. (2) Supply 5V DC to pin 26. (3) Set bus data as indicated on the left. (4) Measure phase difference between pin 51 and pin 49 as shown below. (5) Change the bus data as shown on the left and measure BLK width.											
DH16	H. BLK Width, Minimum	Sub 16H	0	0	x	x	x	x	x	x												
DH17	H. BLK Width, Maximum	Sub 16H	1	1	x	x	x	x	x	x												
DH18	P/N-GP Start Phase 1										(1) Supply 5V to pin 26. (2) Set bus data as indicated on the left. (3) With the respective bus data settings mentioned above, measure the phase and gate width as shown in the figure below.											
DH19	P/N-GP Start Phase 2	Sub 0FH	x	x	x	0	x	x	x	x												
DH20	P/N-GP Gate Width 1	Sub 0FH	x	x	x	1	x	x	x	x												
DH21	P/N-GP Gate Width 2																					
DH22	SECAM-GP Start Phase 1										(1) Supply 5V to pin 26. (2) Set bus data as indicated on the left. (3) With the respective bus data settings mentioned above, measure the phase and gate width as shown in the figure below.											
DH23	SECAM-GP Start Phase 2	Sub 1FH	x	x	0	x	x	x	x	x												
DH24	SECAM-GP Gate Width 1	Sub 1FH	x	x	1	x	x	x	x	x												
DH25	SECAM-GP Gate Width 2																					


NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD}, F_{sc}$ $V_{DD}, Y/C V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS=preset value ; )			
		SUB ADDRESS & BUS DATA			
DH26	Noise Detection Level 1	0 0	x x	x x	x x
DH27	Noise Detection Level 2	0 1	x x	x x	x x
DH28	Noise Detection Level 3	Sub 1DH 1 0	x x	x x	x x
DH29	Noise Detection Level 4	1 1	x x	x x	x x
DV1	V. Ramp Amplitude	—	—	—	—
DV2	V. NF Maximum Amplitude	Sub 17H 1 1	1 1	1 1	1 x
DV3	V. NF Minimum Amplitude	Sub 17H 0 0	0 0	0 0	0 x

(Note) "x" in the data column represents preset value at power ON.

TEST CONDITION  
 $V_{DD}, F_{sc}$   $V_{DD}, Y/C V_{CC} = 5V$  ;  $T_a = 25 \pm 3^\circ C$  ; BUS=preset value ; )

MEASURING METHOD

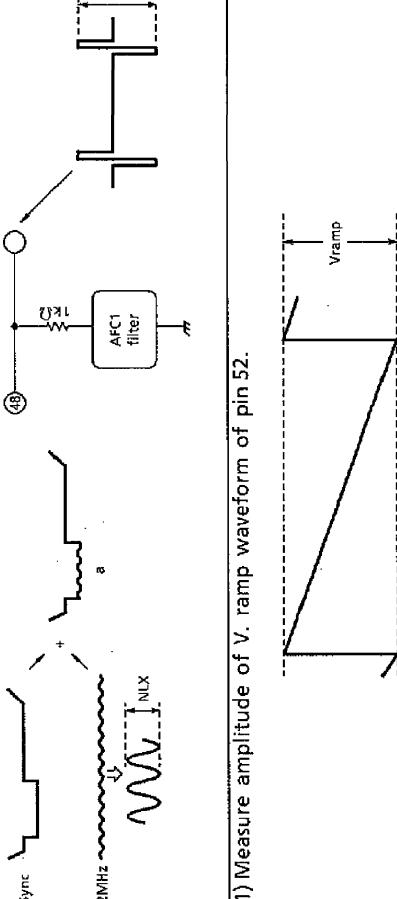(1) input such a signal as shown by "a" of the following figure to pin 51.  
(2) Set bus data as indicated in the first line of the left table.  
(3) Measure NLX when amplitude of pin 41 changes. → NL1  
(4) Set bus data as indicated in the second line of the left table.  
(5) Measure NLX when amplitude of pin 41 changes. → NL2  
(6) Set bus data as indicated in the third line of the left table.  
(7) Measure NLX when amplitude of pin 41 changes. → NL3  
(8) Set bus data as indicated in the fourth line of the left table.  
(9) Measure NLX when amplitude of pin 41 changes. → NL4




(1) Measure amplitude of V. ramp waveform of pin 52.




(1) Set data bus as indicated on the left.  
(2) Measure amplitude of pin 54's signal.

(1) Set data bus as indicated on the left.  
(2) Measure amplitude of pin 54's signal.

NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD, FC} = V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS = preset value ; )									
		(Note) "x" in the data column represents preset value at power ON.									
	SUB-ADDRESS & BUS DATA	MEASURING METHOD									
DV4	V. Amplification Degree										
DV5	V. Amplifier Max. Output	Sub 1BH	1	x	x	x	x	x	x	x	x
DV6	V. Amplifier Min. Output										
DV7	V. S-Curve Correction, Max. Correction Quantity	Sub 19H	1	1	1	1	1	1	1	x	

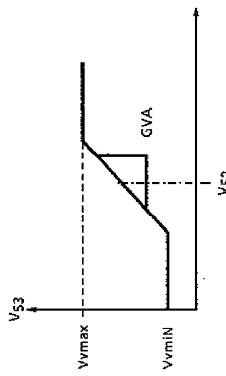

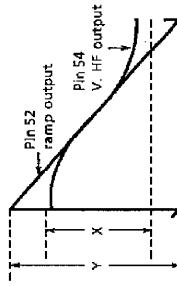- (1) Set bus data as indicated on the left.  
 (2) Change 5.0V of pin 54 voltage by +0.1V and -0.1V, and measure V53 output voltage in both the conditions.  
 (3) Find GVA shown in the figure below.  
 (4) Measure Vvmax and Vvmin shown in the figure below.




- (1) Adjust the oscilloscope's amplitude with the UNCAL so that pin 52 and pin 54 waveforms overlap each other as the bus data is set to the preset value.  
 (2) Change the bus data as indicated on the left, and measure values of X and Y shown in the figure below.


- (3) Find VS according to the equation that  $V_S = (X / Y) \times 100\%$ .


NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD}, F_{sc}, V_{DD}, Y/C, V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS = preset value ; )							
		(Note) "x" in the data column represents preset value at power ON.							
SUB-ADDRESS & BUS DATA									
	V. Reverse S-Curve Correction, Max. Correction Quantity	Sub 19H	0	0	0	0	0	0	x
DV8	V. Linearity Max. Correction Quantity	Sub 1AH	1	1	1	1	x	x	x

- TEST CONDITION  
 $V_{CC} = 9V$  ;  $V_{DD}, F_{sc}, V_{DD}, Y/C, V_{CC} = 5V$  ;  $T_a = 25 \pm 3^\circ C$  ; BUS = preset value ;  
pin 51 input video signal = 50 system  
pin 52 output video signal = 50 system  
pin 54 input video signal = 50 system  
pin 54 output video signal = 50 system
- (Note) "x" in the data column represents preset value at power ON.
- MEASURING METHOD
- Adjust the oscilloscope's amplitude with the UNCAL so that pin 52 and pin 54 waveforms overlap each other as the bus data is set to the preset value.
  - Change the bus data as indicated on the left, and measure values of X and Y shown in the figure below.
  - Find  $V_S$  according to the equation that  $V_S = (X / Y) \times 100\%$ .





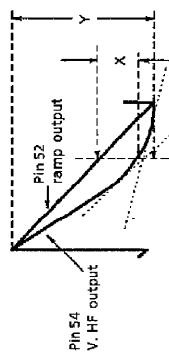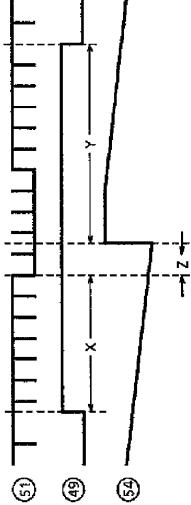- (1) Adjust the oscilloscope's amplitude with the UNCAL so that pin 52 and pin 54 waveforms overlap each other as the bus data is set to the preset value.  
(2) Change the bus data as indicated on the left, and measure values of X and Y shown in the figure below.  
(3) Find  $V_S$  according to the equation that  $V_S = (X / Y) \times 100\%$ .




NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD\_FSC} = V_{DD}$ , $V_{DD\_Y/C} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS=preset value ; ) (Note) "x" in the data column represents preset value at power ON.								TEST CONDITION pin 51 input video signal=50 system	MEASURING METHOD	
		SUB-ADDRESS & BUS DATA										
DV10	AFC-MASK Start Phase	Sub 02H	0	0	0	0	0	0	1		(1) Supply 5V DC to pin 26. (2) Set bus data as indicated on the left and activate the test mode. (3) Measure the AFC-MASK start phase (X) and AFC-MASK stop phase (Y) of pin 49. (4) Set the Sub 16H as indicated on the left. (5) Measure the VNFB start phase (Z) of pin 54.	
DV11	AFC-MASK Stop Phase	Sub 16H	x	x	x	x	x	0	0			
DV12	VNFB Phase											
DV13	V. Output Maximum Phase											
DV14	V. Output Minimum Phase	Sub 16H	x	x	x	x	x	0	0			
DV15	V. Output Phase Variable Range		x	x	x	x	x	1	1			

NOTE	ITEM	TEST CONDITION ( Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25±3°C ; BUS = preset value ; ) (Note) "x" in the data column represents preset value at power ON.									
		SUB-ADDRESS & BUS DATA									
DV16	50 System VBLK Start Phase	Sub 1BH	0	1	x	x	x	x	x	x	x
DV17	50 System VBLK Stop Phase	Sub 1CH	0	x	x	x	x	x	x	x	x
DV18	60 System VBLK Start Phase	Sub 1BH	0	1	x	x	x	x	x	x	x
DV19	60 System VBLK Stop Phase	Sub 1CH	0	x	x	x	x	x	x	x	x
DV20	V. Lead-In Range 1	Sub 16H	x	x	x	0	0	0	0	0	0

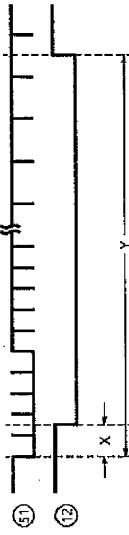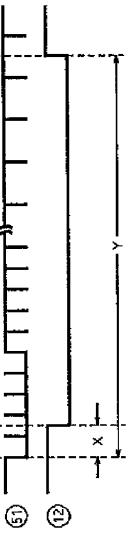

- (1) Input such a video signal of the 50 system as shown in the figure to pin 51.  
 (2) Set bus data as indicated on the left.  
 (3) Measure the VBLK start phase (X) and VBLK stop phase (Y) of pin 12.
- (1) Input such a video signal of the 60 system as shown in the figure to pin 51.  
 (2) Set bus data as indicated on the left.  
 (3) Measure the VBLK start phase (X) and VBLK stop phase (Y) of pin 12.
- (1) Set bus data as indicated on the left.  
 (2) Input 262.5 H video signal to pin 51.  
 (3) Set a certain number of field lines in which signals of pin 51 and pin 54 completely synchronize with each other as shown in the figure below.  
 (4) Decrease the field lines in number and measure number of lines in which pin 51 and pin 54 signals do not synchronize with each other.  
 (5) Again set a certain number of field lines in which pin 51 and pin 52 signals synchronize with each other.  
 (6) Increase the field lines in number and measure number of lines in which pin 51 and pin 52 signals do not synchronize with each other.

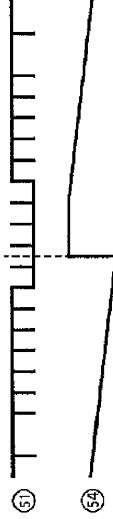

NOTE	ITEM	( Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD}, F_{sc}$ , $V_{DD}, Y/C, V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS = preset value ; )										TEST CONDITION (Note) "x" in the data column represents preset value at power ON.	SUB-ADDRESS & BUS DATA	MEASURING METHOD
DV21	V. Lead-in Range 2	Sub 16H	x	x	0	1	0	0	0	0	0	0	(1) Set bus data as indicated on the left. (2) Input 262.5 H video signal to pin 51. (3) Set a certain number of field lines in which signals of pin 51 and pin 54 completely synchronize with each other as shown in the figure below. (4) Decrease the field lines in number and measure number of lines in which pin 51 and pin 54 signals do not synchronize with each other. (5) Again set a certain number of field lines in which pin 51 and pin 52 signals synchronize with each other. (6) Increase the field lines in number and measure number of lines in which pin 51 and pin 52 signals do not synchronize with each other.	<img alt="Timing diagram showing a sequence of vertical pulses labeled ⑤1, ⑤2, ⑤3, ⑤4, ⑤5, ⑤6, ⑤7, ⑤8, ⑤9, ⑤10, ⑤11, ⑤12, ⑤13, ⑤14, ⑤15, ⑤16, ⑤17, ⑤18, ⑤19, ⑤20, ⑤21, ⑤22, ⑤23, ⑤24, ⑤25, ⑤26, ⑤27, ⑤28, ⑤29, ⑤30, ⑤31, ⑤32, ⑤33, ⑤34, ⑤35, ⑤36, ⑤37, ⑤38, ⑤39, ⑤40, ⑤41, ⑤42, ⑤43, ⑤44, ⑤45, ⑤46, ⑤47, ⑤48, ⑤49, ⑤50, ⑤51, ⑤52, ⑤53, ⑤54, ⑤55, ⑤56, ⑤57, ⑤58, ⑤59, ⑤60, ⑤61, ⑤62, ⑤63, ⑤64, ⑤65, ⑤66, ⑤67, ⑤68, ⑤69, ⑤70, ⑤71, ⑤72, ⑤73, ⑤74, ⑤75, ⑤76, ⑤77, ⑤78, ⑤79, ⑤80, ⑤81, ⑤82, ⑤83, ⑤84, ⑤85, ⑤86, ⑤87, ⑤88, ⑤89, ⑤90, ⑤91, ⑤92, ⑤93, ⑤94, ⑤95, ⑤96, ⑤97, ⑤98, ⑤99, ⑤100, ⑤101, ⑤102, ⑤103, ⑤104, ⑤105, ⑤106, ⑤107, ⑤108, ⑤109, ⑤110, ⑤111, ⑤112, ⑤113, ⑤114, ⑤115, ⑤116, ⑤117, ⑤118, ⑤119, ⑤120, ⑤121, ⑤122, ⑤123, ⑤124, ⑤125, ⑤126, ⑤127, ⑤128, ⑤129, ⑤130, ⑤131, ⑤132, ⑤133, ⑤134, ⑤135, ⑤136, ⑤137, ⑤138, ⑤139, ⑤140, ⑤141, ⑤142, ⑤143, ⑤144, ⑤145, ⑤146, ⑤147, ⑤148, ⑤149, ⑤150, ⑤151, ⑤152, ⑤153, ⑤154, ⑤155, ⑤156, ⑤157, ⑤158, ⑤159, ⑤160, ⑤161, ⑤162, ⑤163, ⑤164, ⑤165, ⑤166, ⑤167, ⑤168, ⑤169, ⑤170, ⑤171, ⑤172, ⑤173, ⑤174, ⑤175, ⑤176, ⑤177, ⑤178, ⑤179, ⑤180, ⑤181, ⑤182, ⑤183, ⑤184, ⑤185, ⑤186, ⑤187, ⑤188, ⑤189, ⑤190, ⑤191, ⑤192, ⑤193, ⑤194, ⑤195, ⑤196, ⑤197, ⑤198, ⑤199, ⑤200, ⑤201, ⑤202, ⑤203, ⑤204, ⑤205, ⑤206, ⑤207, ⑤208, ⑤209, ⑤210, ⑤211, ⑤212, ⑤213, ⑤214, ⑤215, ⑤216, ⑤217, ⑤218, ⑤219, ⑤220, ⑤221, ⑤222, ⑤223, ⑤224, ⑤225, ⑤226, ⑤227, ⑤228, ⑤229, ⑤230, ⑤231, ⑤232, ⑤233, ⑤234, ⑤235, ⑤236, ⑤237, ⑤238, ⑤239, ⑤240, ⑤241, ⑤242, ⑤243, ⑤244, ⑤245, ⑤246, ⑤247, ⑤248, ⑤249, ⑤250, ⑤251, ⑤252, ⑤253, ⑤254, ⑤255, ⑤256, ⑤257, ⑤258, ⑤259, ⑤260, ⑤261, ⑤262, ⑤263, ⑤264, ⑤265, ⑤266, ⑤267, ⑤268, ⑤269, ⑤270, ⑤271, ⑤272, ⑤273, ⑤274, ⑤275, ⑤276, ⑤277, ⑤278, ⑤279, ⑤280, ⑤281, ⑤282, ⑤283, ⑤284, ⑤285, ⑤286, ⑤287, ⑤288, ⑤289, ⑤290, ⑤291, ⑤292, ⑤293, ⑤294, ⑤295, ⑤296, ⑤297, ⑤298, ⑤299, ⑤300, ⑤301, ⑤302, ⑤303, ⑤304, ⑤305, ⑤306, ⑤307, ⑤308, ⑤309, ⑤310, ⑤311, ⑤312, ⑤313, ⑤314, ⑤315, ⑤316, ⑤317, ⑤318, ⑤319, ⑤320, ⑤321, ⑤322, ⑤323, ⑤324, ⑤325, ⑤326, ⑤327, ⑤328, ⑤329, ⑤330, ⑤331, ⑤332, ⑤333, ⑤334, ⑤335, ⑤336, ⑤337, ⑤338, ⑤339, ⑤340, ⑤341, ⑤342, ⑤343, ⑤344, ⑤345, ⑤346, ⑤347, ⑤348, ⑤349, ⑤350, ⑤351, ⑤352, ⑤353, ⑤354, ⑤355, ⑤356, ⑤357, ⑤358, ⑤359, ⑤360, ⑤361, ⑤362, ⑤363, ⑤364, ⑤365, ⑤366, ⑤367, ⑤368, ⑤369, ⑤370, ⑤371, ⑤372, ⑤373, ⑤374, ⑤375, ⑤376, ⑤377, ⑤378, ⑤379, ⑤380, ⑤381, ⑤382, ⑤383, ⑤384, ⑤385, ⑤386, ⑤387, ⑤388, ⑤389, ⑤390, ⑤391, ⑤392, ⑤393, ⑤394, ⑤395, ⑤396, ⑤397, ⑤398, ⑤399, ⑤400, ⑤401, ⑤402, ⑤403, ⑤404, ⑤405, ⑤406, ⑤407, ⑤408, ⑤409, ⑤410, ⑤411, ⑤412, ⑤413, ⑤414, ⑤415, ⑤416, ⑤417, ⑤418, ⑤419, ⑤420, ⑤421, ⑤422, ⑤423, ⑤424, ⑤425, ⑤426, ⑤427, ⑤428, ⑤429, ⑤430, ⑤431, ⑤432, ⑤433, ⑤434, ⑤435, ⑤436, ⑤437, ⑤438, ⑤439, ⑤440, ⑤441, ⑤442, ⑤443, ⑤444, ⑤445, ⑤446, ⑤447, ⑤448, ⑤449, ⑤450, ⑤451, ⑤452, ⑤453, ⑤454, ⑤455, ⑤456, ⑤457, ⑤458, ⑤459, ⑤460, ⑤461, ⑤462, ⑤463, ⑤464, ⑤465, ⑤466, ⑤467, ⑤468, ⑤469, ⑤470, ⑤471, ⑤472, ⑤473, ⑤474, ⑤475, ⑤476, ⑤477, ⑤478, ⑤479, ⑤480, ⑤481, ⑤482, ⑤483, ⑤484, ⑤485, ⑤486, ⑤487, ⑤488, ⑤489, ⑤490, ⑤491, ⑤492, ⑤493, ⑤494, ⑤495, ⑤496, ⑤497, ⑤498, ⑤499, ⑤500, ⑤501, ⑤502, ⑤503, ⑤504, ⑤505, ⑤506, ⑤507, ⑤508, ⑤509, ⑤510, ⑤511, ⑤512, ⑤513, ⑤514, ⑤515, ⑤516, ⑤517, ⑤518, ⑤519, ⑤520, ⑤521, ⑤522, ⑤523, ⑤524, ⑤525, ⑤526, ⑤527, ⑤528, ⑤529, ⑤530, ⑤531, ⑤532, ⑤533, ⑤534, ⑤535, ⑤536, ⑤537, ⑤538, ⑤539, ⑤540, ⑤541, ⑤542, ⑤543, ⑤544, ⑤545, ⑤546, ⑤547, ⑤548, ⑤549, ⑤550, ⑤551, ⑤552, ⑤553, ⑤554, ⑤555, ⑤556, ⑤557, ⑤558, ⑤559, ⑤560, ⑤561, ⑤562, ⑤563, ⑤564, ⑤565, ⑤566, ⑤567, ⑤568, ⑤569, ⑤570, ⑤571, ⑤572, ⑤573, ⑤574, ⑤575, ⑤576, ⑤577, ⑤578, ⑤579, ⑤580, ⑤581, ⑤582, ⑤583, ⑤584, ⑤585, ⑤586, ⑤587, ⑤588, ⑤589, ⑤590, ⑤591, ⑤592, ⑤593, ⑤594, ⑤595, ⑤596, ⑤597, ⑤598, ⑤599, ⑤600, ⑤601, ⑤602, ⑤603, ⑤604, ⑤605, ⑤606, ⑤607, ⑤608, ⑤609, ⑤610, ⑤611, ⑤612, ⑤613, ⑤614, ⑤615, ⑤616, ⑤617, ⑤618, ⑤619, ⑤620, ⑤621, ⑤622, ⑤623, ⑤624, ⑤625, ⑤626, ⑤627, ⑤628, ⑤629, ⑤630, ⑤631, ⑤632, ⑤633, ⑤634, ⑤635, ⑤636, ⑤637, ⑤638, ⑤639, ⑤640, ⑤641, ⑤642, ⑤643, ⑤644, ⑤645, ⑤646, ⑤647, ⑤648, ⑤649, ⑤650, ⑤651, ⑤652, ⑤653, ⑤654, ⑤655, ⑤656, ⑤657, ⑤658, ⑤659, ⑤660, ⑤661, ⑤662, ⑤663, ⑤664, ⑤665, ⑤666, ⑤667, ⑤668, ⑤669, ⑤670, ⑤671, ⑤672, ⑤673, ⑤674, ⑤675, ⑤676, ⑤677, ⑤678, ⑤679, ⑤680, ⑤681, ⑤682, ⑤683, ⑤684, ⑤685, ⑤686, ⑤687, ⑤688, ⑤689, ⑤690, ⑤691, ⑤692, ⑤693, ⑤694, ⑤695, ⑤696, ⑤697, ⑤698, ⑤699, ⑤700, ⑤701, ⑤702, ⑤703, ⑤704, ⑤705, ⑤706, ⑤707, ⑤708, ⑤709, ⑤710, ⑤711, ⑤712, ⑤713, ⑤714, ⑤715, ⑤716, ⑤717, ⑤718, ⑤719, ⑤720, ⑤721, ⑤722, ⑤723, ⑤724, ⑤725, ⑤726, ⑤727, ⑤728, ⑤729, ⑤730, ⑤731, ⑤732, ⑤733, ⑤734, ⑤735, ⑤736, ⑤737, ⑤738, ⑤739, ⑤740, ⑤741, ⑤742, ⑤743, ⑤744, ⑤745, ⑤746, ⑤747, ⑤748, ⑤749, ⑤750, ⑤751, ⑤752, ⑤753, ⑤754, ⑤755, ⑤756, ⑤757, ⑤758, ⑤759, ⑤760, ⑤761, ⑤762, ⑤763, ⑤764, ⑤765, ⑤766, ⑤767, ⑤768, ⑤769, ⑤770, ⑤771, ⑤772, ⑤773, ⑤774, ⑤775, ⑤776, ⑤777, ⑤778, ⑤779, ⑤780, ⑤781, ⑤782, ⑤783, ⑤784, ⑤785, ⑤786, ⑤787, ⑤788, ⑤789, ⑤790, ⑤791, ⑤792, ⑤793, ⑤794, ⑤795, ⑤796, ⑤797, ⑤798, ⑤799, ⑤800, ⑤801, ⑤802, ⑤803, ⑤804, ⑤805, ⑤806, ⑤807, ⑤808, ⑤809, ⑤810, ⑤811, ⑤812, ⑤813, ⑤814, ⑤815, ⑤816, ⑤817, ⑤818, ⑤819, ⑤820, ⑤821, ⑤822, ⑤823, ⑤824, ⑤825, ⑤826, ⑤827, ⑤828, ⑤829, ⑤830, ⑤831, ⑤832, ⑤833, ⑤834, ⑤835, ⑤836, ⑤837, ⑤838, ⑤839, ⑤840, ⑤841, ⑤842, ⑤843, ⑤844, ⑤845, ⑤846, ⑤847, ⑤848, ⑤849, ⑤850, ⑤851, ⑤852, ⑤853, ⑤854, ⑤855, ⑤856, ⑤857, ⑤858, ⑤859, ⑤860, ⑤861, ⑤862, ⑤863, ⑤864, ⑤865, ⑤866, ⑤867, ⑤868, ⑤869, ⑤870, ⑤871, ⑤872, ⑤873, ⑤874, ⑤875, ⑤876, ⑤877, ⑤878, ⑤879, ⑤880, ⑤881, ⑤882, ⑤883, ⑤884, ⑤885, ⑤886, ⑤887, ⑤888, ⑤889, ⑤890, ⑤891, ⑤892, ⑤893, ⑤894, ⑤895, ⑤896, ⑤897, ⑤898, ⑤899, ⑤900, ⑤901, ⑤902, ⑤903, ⑤904, ⑤905, ⑤906, ⑤907, ⑤908, ⑤909, ⑤910, ⑤911, ⑤912, ⑤913, ⑤914, ⑤915, ⑤916, ⑤917, ⑤918, ⑤919, ⑤920, ⑤921, ⑤922, ⑤923, ⑤924, ⑤925, ⑤926, ⑤927, ⑤928, ⑤929, ⑤930, ⑤931, ⑤932, ⑤933, ⑤934, ⑤935, ⑤936, ⑤937, ⑤938, ⑤939, ⑤940, ⑤941, ⑤942, ⑤943, ⑤944, ⑤945, ⑤946, ⑤947, ⑤948, ⑤949, ⑤950, ⑤951, ⑤952, ⑤953, ⑤954, ⑤955, ⑤956, ⑤957, ⑤958, ⑤959, ⑤960, ⑤961, ⑤962, ⑤963, ⑤964, ⑤965, ⑤966, ⑤967, ⑤968, ⑤969, ⑤970, ⑤971, ⑤972, ⑤973, ⑤974, ⑤975, ⑤976, ⑤977, ⑤978, ⑤979, ⑤980, ⑤981, ⑤982, ⑤983, ⑤984, ⑤985, ⑤986, ⑤987, ⑤988, ⑤989, ⑤990, ⑤991, ⑤992, ⑤993, ⑤994, ⑤995, ⑤996, ⑤997, ⑤998, ⑤999, ⑤1000, ⑤1001, ⑤1002, ⑤1003, ⑤1004, ⑤1005, ⑤1006, ⑤1007, ⑤1008, ⑤1009, ⑤1010, ⑤1011, ⑤1012, ⑤1013, ⑤1014, ⑤1015, ⑤1016, ⑤1017, ⑤1018, ⑤1019, ⑤1020, ⑤1021, ⑤1022, ⑤1023, ⑤1024, ⑤1025, ⑤1026, ⑤1027, ⑤1028, ⑤1029, ⑤1030, ⑤1031, ⑤1032, ⑤1033, ⑤1034, ⑤1035, ⑤1036, ⑤1037, ⑤1038, ⑤1039, ⑤1040, ⑤1041, ⑤1042, ⑤1043, ⑤1044, ⑤1045, ⑤1046, ⑤1047, ⑤1048, ⑤1049, ⑤1050, ⑤1051, ⑤1052, ⑤1053, ⑤1054, ⑤1055, ⑤1056, ⑤1057, ⑤1058, ⑤1059, ⑤1060, ⑤1061, ⑤1062, ⑤1063, ⑤1064, ⑤1065, ⑤1066, ⑤1067, ⑤1068, ⑤1069, ⑤1070, ⑤1071, ⑤1072, ⑤1073, ⑤1074, ⑤1075, ⑤1076, ⑤1077, ⑤1078, ⑤1079, ⑤1080, ⑤1081, ⑤1082, ⑤1083, ⑤1084, ⑤1085, ⑤1086, ⑤1087, ⑤1088, ⑤1089, ⑤1090, ⑤1091, ⑤1092, ⑤1093, ⑤1094, ⑤1095, ⑤1096, ⑤1097, ⑤1098, ⑤1099, ⑤1100, ⑤1101, ⑤1102, ⑤1103, ⑤1104, ⑤1105, ⑤1106, ⑤1107, ⑤1108, ⑤1109, ⑤1110, ⑤1111, ⑤1112, ⑤1113, ⑤1114, ⑤1115, ⑤1116, ⑤1117, ⑤1118, ⑤1119, ⑤1120, ⑤1121, ⑤1122, ⑤1123, ⑤1124, ⑤1125, ⑤1126, ⑤1127, ⑤1128, ⑤1129, ⑤1130, ⑤1131, ⑤1132, ⑤1133, ⑤1134, ⑤1135, ⑤1136, ⑤1137, ⑤1138, ⑤1139, ⑤1140, ⑤1141, ⑤1142, ⑤1143, ⑤1144, ⑤1145, ⑤1146, ⑤1147, ⑤1148, ⑤1149, ⑤1150, ⑤1151, ⑤1152, ⑤1153, ⑤1154, ⑤1155, ⑤1156, ⑤1157, ⑤1158, ⑤1159, ⑤1160, ⑤1161, ⑤1162, ⑤1163, ⑤1164, ⑤1165, ⑤1166, ⑤1167, ⑤1168, ⑤1169, ⑤1170, ⑤1171, ⑤1172, ⑤1173, ⑤1174, ⑤1175, ⑤1176, ⑤1177, ⑤1178, ⑤1179, ⑤1180, ⑤1181, ⑤1182, ⑤1183, ⑤1184, ⑤1185, ⑤1186, ⑤1187, ⑤1188, ⑤1189, ⑤1190, ⑤1191, ⑤1192, ⑤1193, ⑤1194, ⑤1195, ⑤1196, ⑤1197, ⑤1198, ⑤1199, ⑤1200, ⑤1201, ⑤1202, ⑤1203, ⑤1204, ⑤1205, ⑤1206, ⑤1207, ⑤1208, ⑤1209, ⑤1210, ⑤1211, ⑤1212, ⑤1213, ⑤1214, ⑤1215, ⑤1216, ⑤1217, ⑤1218, ⑤1219, ⑤1220, ⑤1221, ⑤1222, ⑤1223, ⑤1224, ⑤1225, ⑤1226, ⑤1227, ⑤1228, ⑤1229, ⑤12210, ⑤12211, ⑤12212, ⑤12213, ⑤12214, ⑤12215, ⑤12216, ⑤12217, ⑤12218, ⑤12219, ⑤12220, ⑤12221, ⑤12222, ⑤12223, ⑤12224, ⑤12225, ⑤12226, ⑤12227, ⑤12228, ⑤12229, ⑤12230, ⑤12231, ⑤12232, ⑤12233, ⑤12234, ⑤12235, ⑤12236, ⑤12237, ⑤12238, ⑤12239, ⑤12240, ⑤12241, ⑤12242, ⑤12243, ⑤12244, ⑤12245, ⑤12246, ⑤12247, ⑤12248, ⑤12249, ⑤12250, ⑤12251, ⑤12252, ⑤12253, ⑤12254, ⑤12255, ⑤12256, ⑤12257, ⑤12258, ⑤12259, ⑤12260, ⑤12261, ⑤12262, ⑤12263, ⑤12264, ⑤12265, ⑤12266, ⑤12267, ⑤12268, ⑤12269, ⑤12270, ⑤12271, ⑤12272, ⑤12273, ⑤12274, ⑤12275, ⑤12276, ⑤12277, ⑤12278, ⑤12279, ⑤12280, ⑤12281, ⑤12282, ⑤12283, ⑤12284, ⑤12285, ⑤12286, ⑤12287, ⑤12288, ⑤12289, ⑤12290, ⑤12291, ⑤12292, ⑤12293, ⑤12294, ⑤12295, ⑤12296, ⑤12297, ⑤12298, ⑤12299, ⑤122100, ⑤122101, ⑤122102, ⑤122103, ⑤122104, ⑤122105, ⑤122106, ⑤122107, ⑤122108, ⑤122109, ⑤122110, ⑤122111, ⑤122112, ⑤122113, ⑤122114, ⑤122115, ⑤122116, ⑤122117, ⑤122118, ⑤122119, ⑤122120, ⑤122121, ⑤122122, ⑤122123, ⑤122124, ⑤122125, ⑤122126, ⑤122127, ⑤122128, ⑤122129, ⑤122130, ⑤122131, ⑤122132, ⑤122133, ⑤122134, ⑤122135, ⑤122136, ⑤122137, ⑤122138, ⑤122139, ⑤122140, ⑤122141, ⑤122142, ⑤122143, ⑤122144, ⑤122145, ⑤122146, ⑤1

NOTE	ITEM	( Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , F <sub>C</sub> , V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; T <sub>a</sub> =25±3°C ; BUS=preset value ; ) (Note) "x" in the data column represents preset value at power ON.							
		SUB-ADDRESS & BUS DATA							
DV24	W-VBLK Stop Phase	Sub 1CH	x	0	0	0	0	0	0
DV25	W-PMUTE Stop Phase	Sub 1EH	x	1	1	1	1	1	1
	(Note) Only the 60 system is subject to evaluation.	Sub 1EH	x	0	0	0	0	0	0
DV26	V Centering Center Voltage		1	0	0	0	0	x	x
DV27	V Centering Max Voltage	Sub 18H	1	1	1	1	1	x	x
DV28	V Centering Min Voltage		0	0	0	0	0	x	x

TEST CONDITION  
pin 51 input video signal=50 system  
"Y" in the data column represents preset value at power ON.


MEASURING METHOD

(1) Set bus data as specified for the Sub 1CH in the left columns, and measure the value of Y shown in the figure below.  
W-VBLK stop phase : MAX, MIN

(2) Set bus data as specified for the Sub 1EH in the left columns, and measure the value of Y shown in the figure below.  
W-PMUTE stop phase : MAX, MIN

## 1H DL SECTION

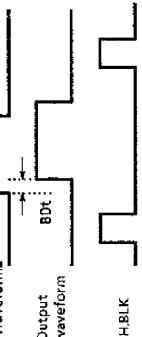NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value ; pin3 = 9V ; pin8 38:41 = 5V)			SUB ADDRESS & DATA	MEASURING METHOD
		SW MODE	SW MODE	DATA		
H1	1HDL Dynamic Range Direct	ON	94H	—	—	(1) Input waveform 1 to pin 33 (B-Yin), and measure V <sub>PBD</sub> , that pin 36 (B-Yout) is saturated input level. (2) Measure V <sub>PRD</sub> of R-Y input in the same way as VNBD.
H2	1HDL Dynamic Range Delay	↑	8CH	—	—	(1) Input waveform 1 to pin 33 (B-Yin), and measure V <sub>PBD</sub> , that pin 36 (B-Yout) is saturated input level. (2) Measure V <sub>PRD</sub> of R-Y input in the same way as V <sub>SBD</sub> .
H3	1HDL Dynamic Range, Direct + Delay	↑	A4H	—	—	(1) Input waveform 1 to pin 33 (B-Yin), and measure V <sub>SBD</sub> , that pin 36 (B-Yout) is saturated input level. (2) Measure V <sub>NRD</sub> of R-Y input in the same way as V <sub>SBD</sub> .
H4	Frequency Characteristic, Direct	↑	94H	—	—	(1) In the same measuring as H1, set waveform 1 to 0.3V <sub>p-p</sub> and f = 100kHz. Measure V <sub>B100</sub> , that is pin 36 (B-Yout) level. And set waveform 1 to f = 700kHz. Measure V <sub>B700</sub> , that is pin 36 (B-Yout) level. GHB1 = 20log (VB700 / VB100) (2) Measure GHR1 of R-Y out in the same way as GHB1.
H5	Frequency Characteristic, Delay	↑	8CH	—	—	(1) In the same measuring as H1, set waveform 1 to 0.3V <sub>p-p</sub> and f = 100kHz. Measure V <sub>B100</sub> , that is pin 36 (B-Yout) level. And set waveform 1 to f = 700kHz. Measure V <sub>B700</sub> , that is pin 36 (B-Yout) level. GHB2 = 20log (VB700 / VB100) (2) Measure GHR2 of R-Y out in the same way as GHB2.
H6	AC Gain Direct	↑	94H	—	—	(1) In the same measuring as H1, set waveform 1 to 0.7V <sub>p-p</sub> . Measure V <sub>BYt1</sub> , that is pin 36 (B-Yout) level. GBY1 = 20log (V <sub>BYt1</sub> / 0.7) (2) Measure GRY1 of R-Y out in the same way as GBY1.
H7	AC Gain Delay	↑	8CH	—	—	(1) In the same measuring as H1, set waveform 1 to 0.7V <sub>p-p</sub> . Measure V <sub>BYt2</sub> , that is pin 36 (B-Yout) level. GBY2 = 20log (V <sub>BYt2</sub> / 0.7) (2) Measure GRY2 of R-Y out in the same way as GBY2.

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>D</sub> DD, F <sub>SC</sub> V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25±3°C ; BUS = preset value ; pin3 = 9V ; pin8:38:41 = 5V)				MEASURING METHOD	
		SW MODE	SUB ADDRESS & DATA				
H8	Direct-Delay AC Gain Difference	↓ S26	07H 0FH	94H 8CH	—	—	(1) GBYD = GBY1 - GBY2 (2) GRYD = GRY1 - GRY2
H9	Color Difference Output DC Stepping	↑	8CH	—	—	—	(1) Measure pin 36 (B- <i>Y</i> <sub>out</sub> ) DC stepping of the picture period. (2) Measure pin 35 (R- <i>Y</i> <sub>out</sub> ) DC stepping of the picture period.
H10	1H Delay Quantity	QN	8CH	—	—	—	(1) Input waveform 2 to pin 36 (B- <i>Y</i> <sub>in</sub> ). And measure the time deference BDt of pin 36 (B- <i>Y</i> <sub>out</sub> ). (2) Input waveform 2 to pin 34 (R- <i>Y</i> <sub>in</sub> ). And measure the time difference RDt of pin 36 (B- <i>Y</i> <sub>out</sub> ). 
H11	Color Difference Output DC-Offset Control	↑	8CH	20H	00H 88H FFH	00H 00h 00h 00h 00h 00h 00h	(1) Set Sub-Address 11h ; data 88h. Measure the pin 36 DC voltage, that is BDC1. (2) Set Sub-Address 11h ; data 88h. Measure the pin 35 DC voltage, that is RDC1. (3) Set Sub-Address 11h ; data 00h. Measure the pin 36 DC voltage, that is BDC2. (4) Set Sub-Address 11h ; data 00h. Measure the pin 35 DC voltage, that is RDC2. (5) Set Sub-Address 11h ; data FFh. Measure the pin 36 DC voltage, that is BDC3. (6) Set Sub-Address 11h ; data FFh. Measure the pin 35 DC voltage, that is RDC3. (7) Bomin = BDC2 - BDC1, Bomax = BDC3 - BDC1, Romin = RDC2 - RDC1, Romax = RDC3 - RDC1
H12	Color Difference Output DC-Offset Control / Min. Control Quantity	↑	A4H	00H	89H	00H	(1) Measure the pin 36 DC voltage, that is BDC4. (2) Measure the pin 35 DC voltage, that is RDC4. (3) Bo1 = BDC4 - BDC1, Ro1 = RDC4 - RDC1
H13	NTSC Mode Gain / NTSC-COM Gain	↑	94H	80H	—	—	(1) Input waveform 1, that is set 0.3V <sub>p-p</sub> and f = 100kHz, to pin 33. Measure pin 36 output level, that is VBNc. (2) GNB = 20log (VBNC / VB100) (3) In the same way as (1) and (2), measure the pin 36 output level, that is VRNC. GNR = 20log (VRNC / VR100)

TEXT SECTION		TEST CONDITION (Unless otherwise specified : H, RGB $V_{CC} = 9V$ ; $V_{DD}, F_{SC} V_{DD}, Y/C V_{CC} = 5V$ ; $T_a = 25 \pm 3^\circ C$ ; BUS = preset value)										
NOTE	ITEM	SW MODE					SUB-ADDRESS & BUS DATA					MEASURING METHOD
		S21	S22	S31	S33	S34	S51	—	—	00H	02H	
T1	Y Color Difference Clamping Voltage	B	B	B	B	A	—	—	FFH	00H	—	—
T2	Contrast Control Characteristic	↑	↑	↑	↑	↑	—	—	80H	00H	—	—
T3	AC Gain	↑	↑	↑	↑	↑	↑	—	—	—	—	—

(1) Short circuit pin 31 (Y IN), pin 34 (R-Y IN) and pin 33 (B-Y IN) in AC coupling.  
(2) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(3) Measure voltage at pin 31, pin 34 and pin 33 ( $V_{cp31}$ ,  $V_{cp34}$ ,  $V_{cp33}$ ).

(1) Input TG7 sine wave signal whose frequency is 100kHz and video amplitude is 0.7V to pin 31 (Y IN).  
(2) Input 0.3V Synchronizing Signal to pin 51 (Sync IN).  
(3) Connect both pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.

(4) Set bus data so that Y sub contrast and drive are set at each center value and color is minimum.  
(5) Varying data on contrast from maximum (FF) to minimum (00), measure maximum and minimum amplitudes of respective outputs of pin 14 (R OUT), pin 13 (G OUT) and pin 12 (B OUT) in video period, and read values of bus data at the same time.

Also, measure the respective amplitudes with the bus data set to the center value (80).  
( $V_{c12mx}$ ,  $V_{c12mn}$ ,  $D12c80$ )  
( $V_{c13mx}$ ,  $V_{c13mn}$ ,  $D13c80$ )  
( $V_{c14mx}$ ,  $V_{c14mn}$ ,  $D14c80$ )

(6) Find ratio between amplitude with maximum unicolor and that with minimum unicolor in conversion into decibel ( $\Delta V13ct$ ).


In the test condition of Note T2, find output/input gain  
(double) with maximum contrast.  
 $G = V_{c13mx} / 0.7V$

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD			
		SW MODE		SUB-ADDRESS & BUS DATA											
		S21	S22	S31	S33	S34	S51	—	—	00H	02H	—	—	—	—
T4	Frequency Characteristic	B	B	B	B	A	—	—	FFH	00H	—	—	—	—	

(1) Input TG7 sine wave signal whose frequency is 6MHz and video amplitude is 0.7V to pin 31 (Y IN).  
(2) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(3) Connect both pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.  
(4) Set bus data so that contrast is maximum, Y sub contrast and drive are set at each center value and color is minimum.  
(5) Measure amplitude of pin 13 signal (G OUT) and find the output/input gain (double) (G6M).  
(6) From the results of the above step 5 and the Note T3, find the frequency characteristic.  
Gf = 20log (GAM / G)

NOTE	ITEM	TEST CONDITION (unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y / C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD				
		S21	S22	S31	S33	S34	S51	S42	—	—	00H	02H	05H	1BH	08H	—
T5	Y Sub-Contrast Control Characteristic	B	B	B	B	A	—	—	FFH	00H	1FH	—	—	—	—	(1) Connect both pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground. (2) Input TG7 sine wave signal whose frequency is 100kHz and video amplitude is 0.7V to pin 31 (Y IN). (3) Input 0.3V synchronizing signal to pin 51 (Sync IN). (4) Set bus data so that contrast is maximum, drive is set at center value and color is minimum. (5) Set bus data on Y sub contrast at maximum (FF) and measure amplitude (V <sub>scmx</sub> ) of pin 14 output (R OUT). Then, set data on Y sub contrast at minimum (00), measure the same (V <sub>scmn</sub> ). (6) From the results of the above step 5, find ratio between V <sub>scmx</sub> and V <sub>scmn</sub> in conversion into decibel (ΔV <sub>snt</sub> ).
T6	Y <sub>2</sub> Input Level	↑	↑	↑	↑	↑	↑	—	—	↑	—	—	BFH	44H	—	(1) Set bus data so that contrast is maximum, Y sub contrast and drive are at each center value. (2) Input 0.3V synchronizing signal to pin 51 while inputting TG7 sine wave signal whose frequency is 100kHz to pin 31 (Y IN). (3) While increasing the amplitude of the sine wave signal, measure video amplitude of signal 1 just before R output of pin 14 is distorted. (V <sub>y2d</sub> )

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD
		SUB-ADDRESS & BUS DATA										
		S21	S22	S31	S33	S34	S51	S42	—	—	00H 02H 05H 1BH 08H	—
T7	Unicolor Control Characteristic	B	B	B	B	A	—	—	FFH	—	—	(1) Input 0.3V synchronizing signal to pin 51 (Sync IN). (2) Input 100kHz, 0.3Vp-p sine wave signal to both pin 33 (B-Y IN) and pin 34 (R-Y IN). (3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground. (4) Set bus data so that drive is at center value and Y mute is on. (5) While changing bus data on unicolor from maximum (FF) to minimum (00), measure maximum and minimum amplitudes of pin 13 (G OUT) and pin 12 (B OUT) in video period respectively, and read the bus data together with., Also, measure respective amplitudes as unicolor data is set at center value (80). (Vn12mx, Vn12mn, D12n80) (Vn13mx, Vn13mn, D13n80) (Vn14mx, Vn14mn, D14n80) (6) Find ratio between amplitude with maximum unicolor data and that with minimum unicolor data in conversion into decibel ( $\Delta V13un$ ).
T8	Relative Amplitude (NTSC)	↑	↑	A	A	↑	A	—	FFH	—	—	While inputting rainbow color bar signal (3.58MHz for NTSC) to pin 42 and 0.3V synchronizing signal to pin 51 so that video amplitude of pin 33 is 0.38Vp-p, find the relative amplitude. (Mnr-b = Vu14mx / Vu12mx, Mng-b = Vu13mx / Vu12mx)
T9	Relative Phase (NTSC)	↑	↑	↑	↑	↑	↑	—	—	↑	—	(1) In the test condition of the Note T8, adjust bus data on tint so that output of pin 12 (B OUT) has the peak level in the 6th bar. (2) Regarding the phase of pin 12 (B OUT) as a reference phase, find comparative phase differences of pin 14 (R OUT) and pin 13 (G OUT) from the reference phase respectively ( $\theta_{nr-b}$ , $\theta_{ng-b}$ ).



- (1) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(2) Input 100kHz, 0.3Vp-p sine wave signal to both pin 33 (B-Y IN) and pin 34 (R-Y IN).  
(3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.  
(4) Set bus data so that drive is at center value and Y mute is on.  
(5) While changing bus data on unicolor from maximum (FF) to minimum (00), measure maximum and minimum amplitudes of pin 13 (G OUT) and pin 12 (B OUT) in video period respectively, and read the bus data together with., Also, measure respective amplitudes as unicolor data is set at center value (80).  
(Vn12mx, Vn12mn, D12n80)  
(Vn13mx, Vn13mn, D13n80)  
(Vn14mx, Vn14mn, D14n80)  
(6) Find ratio between amplitude with maximum unicolor data and that with minimum unicolor data in conversion into decibel ( $\Delta V13un$ ).

- While inputting rainbow color bar signal (3.58MHz for NTSC) to pin 42 and 0.3V synchronizing signal to pin 51 so that video amplitude of pin 33 is 0.38Vp-p, find the relative amplitude.  
(Mnr-b = Vu14mx / Vu12mx, Mng-b = Vu13mx / Vu12mx)
- (1) In the test condition of the Note T8, adjust bus data on tint so that output of pin 12 (B OUT) has the peak level in the 6th bar.  
(2) Regarding the phase of pin 12 (B OUT) as a reference phase, find comparative phase differences of pin 14 (R OUT) and pin 13 (G OUT) from the reference phase respectively ( $\theta_{nr-b}$ ,  $\theta_{ng-b}$ ).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>VDD</sub> , F <sub>SC</sub> V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25±3°C ; BUS = preset value)												MEASURING METHOD
		SW MODE				SUB-ADDRESS & BUS DATA								
		S21	S22	S31	S33	S34	S51	S42	—	00H	02H	1BH	—	—
T <sub>10</sub>	Relative Amplitude (PAL)	B	B	A	A	A	A	A	—	FFH	—	BFH	—	—
T <sub>11</sub>	Relative Phase (PAL)	↑	↑	↑	↑	↑	↑	—	—	↑	—	—	—	—
T <sub>12</sub>	Color Control Characteristic	↑	↑	B	B	B	↑	—	—	↑	FFH	↑	—	—
T <sub>13</sub>	Color Control Characteristic, Residual Color	↑	↑	↑	↑	—	—	—	—	↑	00H	↑	—	—

(1) In the test condition of the Note T<sub>10</sub>, adjust bus data on tint so that output of pin 12 (B OUT) has the peak level in the 6th bar.

(2) Regarding the phase of pin 12 (B OUT) as a reference phase, find comparative phase differences of pin 14 (R OUT) and pin 13 (G OUT) from the reference phase respectively ( $\theta_{pg-b}$ ,  $\theta_{pg-g}$ ).

(1) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(2) Input 100kHz, 0.1V-p-p sine wave signal to both pin 33 (B-Y IN) and pin 34 (R-Y IN).  
(3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.  
(4) Set bus data so that unicolor is maximum, drive is at center value and Y mute is on.  
(5) Measure amplitude of pin 12 (B OUT) as bus data on color is set maximum (FF). (V<sub>cmx</sub>)  
(6) Read bus data when output level of pin 12 is 10%, 50% and 90% of V<sub>cmx</sub> respectively (Dc10, Dc50, Dc90).  
(7) From results of the above step 6, calculate number of steps from Dc10 to Dc90  
(D<sub>col</sub>) and that from 00 to Dc50 (ecol).  
(8) Measure respective amplitudes of pin 12 (B OUT), pin 13 (G OUT) and pin 14 (R OUT) with color data set at minimum, and regard the results as color residuals (ecb, ecg, ecr).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD			
		SW MODE					SUB-ADDRESS & BUS DATA								
		S21	S22	S31	S33	S34	S51	S42	—	—	00H	02H	1BH	—	—
T14	Chroma Input Range	B	B	A	A	A	A	A	—	FFH	88H	BFH	—	—	(1) Input rainbow color bar signal (3.58MHz for NTSC or 4.43MHz for PAL) to pin 42 (C IN) and 0.3V synchronizing signal to pin 51 (Sync IN). (2) Connect pin 36 (B-Y OUT) and pin 33 (B-Y IN), pin 35 (R-Y OUT) and pin 34 (R-Y IN) in AC coupling respectively. (3) Connect pin 21 (Digital Y <sub>s</sub> ) and pin 22 (Analog Y <sub>s</sub> ) to ground. (4) Set bus data so that unicolor is maximum, drive and color are set at each center value (80) and mute is on. (5) While increasing amplitude of chroma signal input to pin 42, measure amplitude just before any of pin 12 (B OUT), pin 13 (G OUT) and pin 14 (R OUT) output signals is distorted (Vcr).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25±3°C ; BUS = preset value)										MEASURING METHOD	
		SW MODE					SUB-ADDRESS & BUS DATA						
		S21	S22	S31	S33	S34	S51	—	—	01H	05H	—	—
T15	Brightness Control Characteristic	B	B	B	B	A	—	—	FFH	10H	—	—	—
T16	Brightness Center Voltage	↑	↑	↑	↑	↑	—	—	80H	↑	—	—	—
T17	Brightness Data Sensitivity	↑	↑	↑	↑	↑	—	—	—	—	—	—	—
T18	RGB Output Voltage Axes Difference	↑	↑	↑	↑	↑	—	—	—	—	—	—	—
T19	White Peak Limit Level	↑	↑	↑	↑	↑	—	—	—	00H	1FH	—	—

(1) Short circuit pin 31 (Y IN), pin 33 (B-Y IN) and pin 34 (R-Y IN) in AC coupling.

(2) Input 0.3V synchronizing signal to pin 51 (Sync IN).

(3) Set bus data so that R, G, B cut off data are set at center value.

(4) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.

(5) While changing bus data on brightness from maximum to minimum, measure video voltage of pin 13 (G OUT) to find maximum and minimum voltages (max : V<sub>bright</sub>, min : V<sub>brightm</sub>).

(6) With bus data on brightness set at center value, measure video voltage of pin 13 (G OUT) (V<sub>bright</sub>).

(7) On the condition that bus data with which V<sub>bright</sub> is obtained in measurement of the above step 5 is D<sub>bright</sub> and bus data with which V<sub>brightm</sub> is obtained in measurement of the above step 5 is D<sub>brightm</sub>, calculate sensitivity of brightness data ( $\Delta V_{bright}$ ).

$$\Delta V_{bright} = (V_{brightm} - V_{bright}) / (D_{brightm} - D_{bright})$$

(1) In the same manner as the Note T16, measure video voltage of pin 12 (B OUT) with bus data on brightness set at center value.


(2) Find maximum axes difference in the brightness center voltage.

(1) Set bus data so that contrast and Y sub contrast are maximum and brightness is minimum.

(2) Input TG7 sine wave signal whose frequency is 100kHz and amplitude in video period is 0.9V to pin 31 (Y IN).

(3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.


(4) While turning on/off WPL with bus, measure video amplitude of pin 14 (R OUT) with WPL being activated (V<sub>wpl</sub>).



NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)													
		SW MODE		SUB-ADDRESS & BUS DATA		MEASURING METHOD									
		S21	S22	S31	S33	S34	S51	—	—	09H	0AH	0CH	0DH	0EH	—
T20	Cutoff Control Characteristic	B	B	B	B	A	—	—	—	80H	80H	FFH	FFH	FFH	—
T21	Cutoff Center Level	↑	↑	↑	↑	↑	—	—	—	↑	80H	80H	80H	—	(1) Short circuit pin 31 (Y IN), pin 33 (B-Y IN) and pin 34 (R-Y IN) in AC coupling. (2) Input 0.3V synchronizing signal to pin 51 (Sync IN). (3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground. (4) Set bus data on brightness at center value. (5) While changing data on cutoff from maximum to minimum, measure video voltage of pin 13 (G OUT) to find maximum and minimum values (max : V <sub>comx</sub> , min : V <sub>comn</sub> ). (6) Set cutoff data at center value and measure video voltage of pin 13 (G OUT) ( $\Delta V_{cutoff}$ ). (7) On the condition that bus data with which V <sub>comx</sub> is obtained in measurement of the above step 5 is D <sub>comx</sub> and bus data with which V <sub>comn</sub> is obtained in the same is D <sub>comn</sub> , calculate number of steps ( $\Delta D_{cutoff}$ ) $\Delta D_{cutoff} = D_{comx} - D_{comn}$
T22	Cutoff Variable Range	↑	↑	↑	↑	↑	—	—	—	—	—	—	—	—	(1) Short circuit pin 33 (B-Y IN) and pin 34 (R-Y IN) in AC coupling. (2) Input a stepping signal whose amplitude in video period is 0.3V to pin 31 (Y IN). (3) Input 0.3V synchronizing signal to pin 51 (Sync IN). (4) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground. (5) Set bus data so that contrast is maximum and Y sub contrast is minimum. (6) While changing drive data from minimum to maximum, measure video amplitude of pin 13 (G OUT) to find maximum and minimum values (max : V <sub>drmx</sub> , min : V <sub>drmn</sub> ). (7) Set drive data at center value and measure video amplitude of pin 13 (G OUT) ( $\Delta V_{drive}$ ). Calculate amplitude ratio of the measured value to the maximum and minimum amplitudes measured in the above step 6 respectively (DR +, DR -).
T23	Drive Variable Range	↑	↑	↑	↑	↑	—	—	—	FFH	FFH	80H	80H	80H	—

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD		
		SW MODE					SUB-ADDRESS & BUS DATA							
		S21	S22	S31	S33	S34	S51	S45	S39	S44	—	—	—	—
T24	DC Regeneration	B	B	A	B	A	B	A	A	—	—	—	—	
T25	RGB Output S/N Ratio	↑	↑	B	↑	↑	↑	↑	—	—	—	—	—	

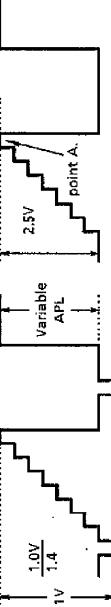(1) Short circuit pin 33 (B-Y IN) and pin 34 (R-Y IN) in AC coupling.  
(2) Input such the step-up signal as shown below to pin 45 (Y IN) and pin 51 (Sync IN).  
(3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.  
(4) Set bus data so that contrast is maximum and DC transmission correction factor is minimum.  
(5) Adjust data on Y sub contrast so that video amplitude of pin 13 (G OUT) is 2.5V.  
(6) While varying API of the step-up signal from 10% to 90%, measure change in voltage at the point A.



(1) Short circuit pin 31 (Y IN), pin 33 (B-Y IN) and pin 34 (R-Y IN) in AC coupling.  
(2) Input synchronizing signal of 0.3V in amplitude to pin 51 (Sync IN).  
(3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.  
(4) Set bus data on contrast at maximum.  
(5) Set bus data on Y sub contrast at center value.  
(6) Measure video noise level of pin 13 (G OUT) with oscilloscope (no).  
SNO = -20log<sub>10</sub> (2.5 / (1/5) × no)

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>D</sub> , F <sub>sc</sub> , V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)									
		SUBADDRESS & BUS DATA					MEASURING METHOD				
		S21	S22	S31	S33	S34	S51	—	—	01H 05H 08H 0C8H 0DH 0EH	
T26	Blanking Pulse Output Level	B	B	B	B	A	—	—	80H	10H 04H 80H 80H 80H 80H	
T27	Blanking Pulse Delay Time	↑	↑	↑	↑	—	—	↑	↑	↑	↑
T28	RGB Min. Output Level	↑	↑	↑	↑	↑	—	—	00H	↑	00H 00H 00H 00H 00H 00H
T29	RGB Max. Output Level	↑	↑	↑	↑	↑	—	—	—	—	80H 1fH 44H 80H 80H 80H

(1) Input synchronizing signal of 0.3V in amplitude to pin 51 (Sync IN).

(2) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.

(3) Set bus data so that blanking is on.

(4) Measure voltage of pin 13 (G OUT) in V. blanking period (V<sub>b</sub>).

(5) Measure voltage of pin 13 (G OUT) in H. blanking period (V<sub>h</sub>).

In the setting condition of the Note T26, find "t<sub>don</sub>" and "t<sub>doff</sub>" (see figure below) between the signal impressed to pin 6 (BFP IN) and output signal of pin 13 (G OUT).

(1) Short circuit pin 31 (Y IN), pin 33 (B-Y IN) and pin 34 (R-Y IN) in AC coupling.

(2) Input synchronizing signal of 0.3V in amplitude to pin 51 (Sync IN).

(3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.

(4) Set bus data so that brightness and RGB cutoff are minimum.

(5) Measure video voltage of pin 13 (G OUT) (V<sub>mn</sub>).

(1) Short circuit pin 33 (B-Y IN) and pin 34 (R-Y IN) in AC coupling.

(2) Input stepping signal to pin 31 (Y IN) and synchronizing signal of 0.3V in amplitude to pin 51 (Sync IN).

(3) Connect pin 21 (Digital Ys) and pin 22 (Analog Ys) to ground.

(4) Set bus data so that contrast and Y sub contrast are maximum.

(5) While increasing amplitude of the stepping signal, measure maximum output level just before video signal of pin 13 (G OUT) is distorted (V<sub>mn</sub>).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD			
		SW MODE		SUB-ADDRESS & BUS DATA											
		S18	S19	S20	S21	S22	S31	S33	S34	S51	15H	1CH	—	—	—
T30	Halftone Ys Level	B	B	B	A	B	B	B	A	00H	80H	—	—	—	(1) Input stepping signal whose amplitude is 0.3V in video period to pin 31 (Y IN) and pin 51 (Sync IN). (2) Set bus data so that blanking is off and halftone is -3dB in on status. (3) Connect power supply to pin 21 (Digital Ys). While impressing 0V to it, measure amplitude and pedestal level of pin 13 (G OUT) in video period (Vm13, Vp13). (4) Raising supply voltage to pin 21 gradually from 0V, measure level (Vtht1) of pin 21 when amplitude of pin 13 output signal changes. At the same time, measure amplitude and pedestal level of pin 13 in video period after the pin 13 output signal changed in amplitude. (Vm13b, Vp13b) (5) According to results of the above steps 3 and 4, calculate gain of -3dB halftone and variation of pedestal level. $G3ht13 = 20 \log (Vm13b / Vm13)$ (6) Set bus data so that halftone is -6dB in on status, and perform the same measurement as the above steps 4 and 5 to find gain of -6dB halftone and variation of pedestal level (G6ht13). (7) Raising supply voltage to pin 21 further from Vtht1, measure level (Vtxt1) of pin 21 when output signal of pin 13 (G OUT) changes in amplitude and DC level of pin 13 after the change of its output (Vtx13). (8) From results of the above steps 3 and 7, calculate low level of the output in the text mode. $Vtx13 = Vtx13 - Vp13$ (9) Raising supply voltage to pin 21 by 3V from that in the above step 7, confirm that there is no change in output level of pin 13.
T31	Halftone Gain 1	↑	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	—
T32	Halftone Gain 2	↑	↑	↑	↑	↑	↑	↑	↑	01H	↑	—	—	—	—
T33	Text ON Ys, Low Level	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—
T34	Text/OSD Output, Low Level	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25±3°C ; BUS = preset value)										MEASURING METHOD	
		SW MODE		SUB-ADDRESS & BUS DATA									
S18	S19	S20	S21	S22	S31	S33	S51	—	15H	1CH	—	—	—
T35	Text RGB Output, High Level	A	A	A	B	B	B	—	02H	80H	—	—	—
T36	OSD Ys ON, Low Level	↑	↑	↑	↑	↑	↑	—	↑	—	—	—	—
T37	OSD RGB Output, High Level	↑	↑	↑	↑	↑	↑	—	↑	—	—	—	—

(1) Input stepping signal whose amplitude is 0.3V in video period to pin 31 (Y IN) and pin 51 (Sync IN).  
 (2) Set bus data so that blanking and halftone are off.  
 (3) Connect power supply to pin 21 (Digital Ys). While impressing 0V to it, measure pedestal level of pin 13 output signal (G OUT) (V<sub>p13</sub>).  
 (4) Connect power supply to pin 19 (Digital G IN) and impress it with 2V.  
 (5) Raising supply voltage to pin 21 gradually from 0V, measure video level of pin 21 after output signal of pin 13 changed (V<sub>lx13</sub>).  
 (6) From measurement results of the above steps 3 and 5, calculate high level in the text mode.  
 $V_{mt13} = V_{lx13} - V_{pt13}$   
 (7) Raising supply voltage to pin 21 further from that in the step 5, measure level (V<sub>host</sub>) of pin 21 when the level of pin 13 output signal changes from that in the step 5 to -6dB as halftone data is set to ON (the 6th step of Notes T30 to T34).  
 (8) In the condition of the above step 7, raise voltage impressed to pin 19 to 3V and measure output voltage of pin 13 (V<sub>os13</sub>).  
 (9) From results of the above steps 3 and 7, calculate high level of the output in the OSD mode.  
 $V_{mos13} = V_{os13} - V_{pt13}$

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , F <sub>SC</sub> V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25±3°C ; BUS = preset value)														MEASURING METHOD
		SW MODE		SUB-ADDRESS & BUS DATA												
		\$18	\$19	\$20	\$21	\$22	\$31	\$33	\$34	\$51	—	—	—	—	—	
		A	A	A	B	B	B	A	B	A	—	—	—	—	—	
T38	Text Input Threshold Level															(1) Connect power supply to pin 21 (Digital Y <sub>S</sub> ) and impress 1.5V to it. (2) Connect power supply to pin 19 (Digital G IN). While raising supply voltage gradually from 0V, measure supply voltage when output signal of pin 13 (G OUT) changes (V <sub>txt</sub> ). (3) Raising the supply voltage to pin 19 furthermore to 4V, confirm that there is no change in the output signal of pin 13 (G OUT).
T39	OSD Input Threshold Level															(1) Connect power supply to pin 21 (Digital Y <sub>S</sub> ) and impress 2.5V to it. (2) Connect power supply to pin 19 (Digital G IN). While raising supply voltage gradually from 0V, measure supply voltage when output signal of pin 13 (G OUT) changes (V <sub>osd</sub> ). (3) Raising the supply voltage to pin 19 furthermore to 4V, confirm that there is no change in the output signal of pin 13 (G OUT).


NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)												MEASURING METHOD
		SW MODE			SUB-ADDRESS & BUS DATA									
		S18	S19	S20	S21	S22	S31	S33	S34	S51	—	—	—	—
T <sub>40</sub>	OSD Mode Switching Rise-Up Time	A	A	A	B	B	B	A	—	—	—	—	—	—
T <sub>41</sub>	OSD Mode Switching Rise-Up Transfer Time	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	—
T <sub>42</sub>	OSD Mode Switching Rise-Up Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	—
T <sub>43</sub>	OSD Mode Switching Breaking Time	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	—
T <sub>44</sub>	OSD Mode Switching Breaking Transfer Time	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	—
T <sub>45</sub>	OSD Mode Switching Breaking Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	—


(1) Input a Signal Shown by (a) in the following figure to pin 21 (Digital Ys).

(2) According to (b) in the figure, measure  $\tau_{Rosc}$ ,  $t_{PRos}$ ,  $\tau_{Fosc}$  and  $t_{PFos}$  for output signals of pin 14 (R OUT), pin 13 (G OUT) and pin 12 (B OUT) respectively.

(3) Find maximum values of  $t_{PRos}$  and  $t_{PFos}$  respectively ( $t_{PRos}$ ,  $t_{PFos}$ ).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)												MEASURING METHOD
		SW MODE			SUB-ADDRESS & BUS DATA									
		\$18	\$19	\$20	\$21	\$22	\$31	\$33	\$34	\$51	—	—	—	—
T46	OSD Hi DC Switching Rise-Up Time	A	A	A	B	B	B	A	—	—	—	—	—	(1) Supply pin 21 (Digital Y <sub>S</sub> ) with 2.5V. (2) Input 5V <sub>p-p</sub> signal shown by (a) in the figure to pin 18 (Digital R IN). (3) Referring to (b) of the following figure, measure $\tau_{Roh}$ , $t_{Foh}$ and $t_{pFoh}$ for output signal of pin 14 (R OUT). (4) Input 5V <sub>p-p</sub> signal shown by (a) in the figure to pin 19 (Digital G IN). (5) Perform the same measurement as the above step 3 for pin 13 output (G OUT) referring to (b) of the following figure. (6) Input 5V <sub>p-p</sub> signal shown by (a) in the figure to pin 20 (Digital B IN). (7) Perform the same measurement as the above step 3 for pin 12 output (B OUT) referring to (b) of the following figure. (8) Find maximum axes differences in $t_{pRoh}$ and $t_{pFoh}$ among the three outputs ( $\Delta t_{pRoh}$ , $\Delta t_{pFoh}$ ).
T47	OSD Hi DC Switching Rise-Up Transfer Time	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	
T48	OSD Hi DC Switching Rise-Up Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	
T49	OSD Hi DC Switching Breaking Time	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	
T50	OSD Hi DC Switching Breaking Transfer Time	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	
T51	OSD Hi DC Switching Breaking Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—	—	

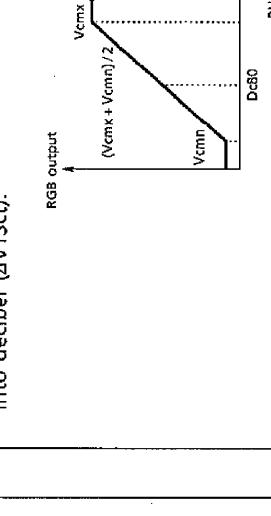TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , F <sub>SC</sub> V <sub>DD</sub> , Y / C V <sub>CC</sub> =5V ; T <sub>A</sub> =25±3°C ; BUS = preset value)																
NOTE	ITEM	SUB-ADDRESS & BUS DATA								MEASURING METHOD						
		SW MODE		S <sub>21</sub>		S <sub>22</sub>		S <sub>31</sub>		S <sub>33</sub>		S <sub>34</sub>		S <sub>51</sub>		
		FFH	—	—	—	—	—	06H	—	—	—	—	—	—	—	(1) Input 0.3V synchronizing signal to pin 51 (Sync IN). (2) Supply 5V of external supply voltage to pin 22 (Analog Ys). (3) Set bus data at center value. (4) Input TG7 sine wave signal (f=100kHz, video amplitude = 0.5V) to pin 23 (Analog R IN). (5) While changing data on RGB contrast from maximum (FF) to minimum (00), measure maximum and minimum amplitudes of pin 14 (R OUT) in video period. At the same time, measure video amplitude of pin 14 when the bus data is set at the center value (80). (Vc14mx, Vc14mn, D14c80) (6) In the same manner as the above steps 4 and 5, measure output signal of pin 13 with input of the same external power supply to pin 24 (Analog G IN), and measure output signal of pin 12 with input of the same power supply to pin 25 (Analog B IN). (Vc12mx, Vc12mn, D12c80). (7) Find amplitude ratio between signal with maximum unicolor data and signal with minimum unicolor data in conversion into decibel ( $\Delta V_{13ct}$ ).
	RGB Contrast Control Characteristic	B	A	B	B	A	—	80H	—	—	00H	—	—	—	—	
T52																



NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta=25±3°C ; BUS = preset value)										MEASURING METHOD		
		SW MODE		SUB-ADDRESS & BUS DATA										
		S21	S22	S31	S33	S34	S51	—	—	06H	—	—	—	
		B	A	B	B	B	A	—	—	—	—	—	—	
T53	Analog RGB AC Gain												In the setting condition of the Note T52, calculate output / input gain (double) with contrast data being set maximum. $G = V_{C13m} / 0.5V$	
T54	Analog RGB Frequency Characteristic	↑	↑	↑	↑	↑	↑	—	—	FFH	—	—	—	(1) Input 0.3V synchronizing signal to pin 51 (Sync IN). (2) Supply 5V of external supply voltage to pin 22 (Analog Ys). (3) Input TG7 sine wave signal ( $f = 100\text{kHz}$ , video amplitude = 0.5V) to pin 24 (Analog G IN). (4) Set bus data so that contrast is maximum and drive is set at center value. (5) Measure video amplitude of pin 13 (G OUT) and calculate output / input gain (double) (G6M). (6) From measurement results of the above step 5 and the preceding Note 53, find frequency characteristic. $G_f = 20\log (G6M / G)$

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25 ± 3°C ; BUS = preset value)											
		SW MODE					SUB ADDRESS & BUS DATA					MEASURING METHOD	
		S21	S22	S31	S33	S34	S51	—	—	01H	06H	—	—
T55	Analog RGB Dynamic Range	B	A	B	B	A	—	—	—	00H	—	—	—
T56	RGB Brightness Control Characteristic	↑	↑	↑	↑	↑	↑	—	—	FFH	—	—	—
T57	RGB Brightness Center Voltage	↑	↑	↑	↑	↑	↑	—	—	00H	—	—	—
T58	RGB Brightness Data Sensitivity	↑	↑	↑	↑	↑	↑	—	—	80H	—	—	—
T59	Analog RGB Mode ON Voltage	↑	↑	↑	↑	↑	↑	—	—	—	—	—	—

(1) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(2) Supply 5V of external supply voltage to pin 22 (Analog Ys).  
(3) Set bus data so that contrast is minimum and drive is set at center value.  
(4) While inputting stepping signal to pin 24 (Analog G IN), increase video amplitude gradually from 0.  
(5) Measure video amplitude of pin 24 when video voltage of pin 13 (G OUT) does not change.


(1) Short circuit pin 31 (Y IN), pin 33 (B/Y IN) and pin 34 (R-Y IN) in AC coupling.  
(2) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(3) Set bus data on RGB cutoff at center value.  
(4) Supply 5V of external supply voltage to pin 22 (Analog Ys).  
(5) While changing data brightness from maximum to minimum, measure maximum and minimum voltages of pin 13 (G OUT) in video period. (max : Vbrmx, min : Vbrmn)  
(6) Set bus data on brightness at center value and measure video voltage of pin 13 (G OUT) (Vbcnt).  
(7) On the condition that bus data with which Vbrmx is obtained in measurement of the above step 5 is Dbrmx and bus data with which Vbrmn is obtained in measurement of the above step 5 is Dbrmn, calculate sensitivity of brightness data ( $\Delta V_{brt}$ ).  

$$\Delta V_{brt} = (Vbrmx - Vbrmn) / (Dbrmx - Dbrmn)$$

(1) Input TG7 sine wave signal (f = 100kHz, video amplitude = 0.3V) to pin 23 (Analog R IN).  
(2) Supply 5V of external supply voltage to pin 22 (Analog Ys) and raise the voltage gradually from 0V.  
(3) Measure voltage at pin 22 when signal 1 is output from pin 14 (R OUT) (Vanath).

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD
		SW MODE		SUB-ADDRESS & BUS DATA		—	—	—	—	—	—	
S21	S22	S31	S33	S34	S51	—	—	—	—	—	—	
T60	Analog RGB Switching Rise-Up Time	B	A	B	B	A	—	—	—	—	—	(1) Supply signal (2V <sub>p-p</sub> ) shown by (a) in the following figure to pin 22 (Analog Y <sub>S</sub> ). (2) Referring to (b) of the following figure, measure $\tau_{Ran}$ , $\tau_{Fana}$ and $\tau_{FFan}$ for outputs of pin 14 (R OUT), pin 13 (G OUT) and pin 12 (B OUT). (3) Find maximum values of $\tau_{PRan}$ and $\tau_{PFan}$ respectively ( $\Delta\tau_{PRan}$ , $\Delta\tau_{PFan}$ )
T61	Analog RGB Switching Rise-Up Transfer Time	↑	↑	↑	↑	↑	—	—	—	—	—	
T62	Analog RGB Switching Rise-Up Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	—	—	—	—	—	
T63	Analog RGB Switching Breaking Time	↑	↑	↑	↑	↑	—	—	—	—	—	
T64	Analog RGB Transfer Time	↑	↑	↑	↑	↑	—	—	—	—	—	
T65	Analog RGB Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	—	—	—	—	—	

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DOD</sub> , F <sub>sc</sub> V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; T <sub>a</sub> =25±3°C ; BUS = preset value)										MEASURING METHOD
		SW MODE					SUB-ADDRESS & BUS DATA					
		\$21	\$22	\$31	\$33	\$34	\$51	—	—	—	—	
T66	Analog RGB Hi Switching Rise-Up Time	B	A	B	B	A	—	—	—	—	—	(1) Supply 2V to pin 22 (Analog Y <sub>S</sub> ). (2) Input 0.5V <sub>p-p</sub> signal shown by (a) in the following figure to pin 23 (Analog R IN). (3) Referring to (b) of the following figure, measure $\tau_{Ranh}$ , $t_{PRah}$ , $\tau_{Fanh}$ and $t_{PFah}$ for output of pin 14 (R OUT). (4) Input 0.5V <sub>p-p</sub> signal shown by (a) in the following figure to pin 24 (Analog G IN). (5) Referring to (b) of the following figure, perform the same measurement as the above step 3 for output of pin 13 (G OUT). (6) Input 0.5V <sub>p-p</sub> signal shown by (a) in the following figure to pin 25 (Analog B IN). (7) Referring to (b) of the following figure, perform the same measurement as the above step 3 for output of pin 12 (B OUT). (8) Find maximum axes difference in $t_{PRah}$ and $t_{PFah}$ among the three outputs ( $\Delta t_{PRah}$ , $\Delta t_{PFah}$ ).
T67	Analog RGB Hi Switching Rise-Up Transfer Time	↑	↑	↑	↑	↑	—	—	—	—	—	
T68	Analog RGB Hi Switching Rise-Up Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	—	—	—	—	—	
T69	Analog RGB Hi Switching Breaking Time	↑	↑	↑	↑	↑	—	—	—	—	—	
T70	Analog RGB Hi Switching Breaking Transfer Time	↑	↑	↑	↑	↑	—	—	—	—	—	
T71	Analog RGB Hi Switching Breaking Transfer Time, 3 Axes Difference	↑	↑	↑	↑	↑	—	—	—	—	—	

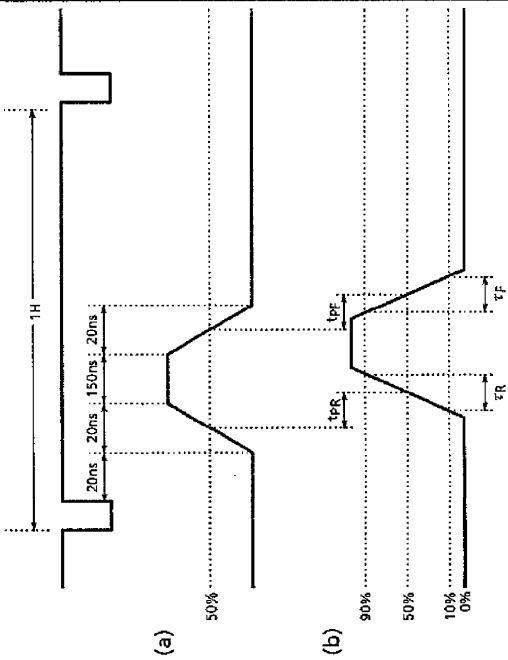

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; Ta = 25 ± 3°C ; BUS = preset value)										MEASURING METHOD
		SUB ADDRESS & BUS DATA										
S21	S22	S31	S33	S34	S51	—	—	—	—	—	—	
T72	TV-Analog RGB Crosstalk	B	A	B	B	A	—	—	—	—	—	(1) Input TG7 sine wave signal (f = 4MHz, video amplitude = 0.5V) to pin 31 (Y2 IN). (2) Short circuit pin 25 (Analog G IN) in AC coupling. (3) Input 0.3V synchronizing signal to pin 51 (Sync IN). (4) Set bus data so that contrast is maximum, Y sub contrast and drive are set at center value. (5) Supply pin 22 (Analog Ys) with 0V of external power supply. (6) Measure video voltage of output signal of pin 13 (G OUT) (Vtg). (7) Supply pin 22 (Analog Ys) with 2V of external power supply. (8) Measure video voltage of output signal of pin 13 (G OUT) (Vana). (9) From measurement results of the above steps 5 and 7, calculate crosstalk from TV to analog RGB. $C_{rtv} = 20 \log (V_{ana} / V_{tg})$
T73	Analog RGB-TV Crosstalk	↑	↑	↑	↑	↑	—	—	—	—	—	(1) Short circuit pin 31 (Y2 IN), pin 34 (R-Y IN) and pin 33 (B-Y IN) in AC coupling. (2) Input 0.3V synchronizing signal to pin 51 (Sync IN). (3) Set bus data so that contrast is maximum and drive is set at center value. (4) Input TG7 sine wave signal (f = 4MHz, video amplitude = 0.5V) to pin 24 (Analog G IN). (5) Supply pin 22 (Analog Ys) with 0V of external power supply. (6) Measure video voltage of output signal of pin 13 (G OUT) (Vant). (7) Supply pin 22 (Analog Ys) with 2V of external power supply. (8) Measure video voltage of output signal of pin 13 (G OUT) (Vtan). (9) From measurement results of the above steps 6 and 8, calculate crosstalk from analog RGB to TV. $C_{rtv} = 20 \log (V_{ant} / V_{tan})$

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , I <sub>SC</sub> V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25±3°C ; BUS = preset value)										MEASURING METHOD
		SW MODE					SUB ADDRESS & BUS DATA					
\$21	\$22	\$31	\$33	\$34	\$51	—	—	01H	15H	—	—	—
T74	ABL Point Characteristic	B	B	B	B	A	—	—	FFH	90H	—	—
									FOH			
T75	ACL Characteristic	↑	↑	↑	↑	↑	—	—	—	—	—	—
T76	ABL Gain Characteristic	↑	↑	↑	↑	↑	↑	↑	↑	—	—	—

(1) Input TG7 sine wave signal (f=4MHz, video amplitude = 0.5V) to pin 31 (Y2 IN).  
(2) Short circuit pin 23 (Analog R IN), pin 25 (Analog G IN) and pin 26 (Analog B IN) in AC coupling.  
(3) Set bus data so that brightness is maximum and ABL gain is at center value, and supply pin 16 with external supply voltage. While turning down voltage supplied to pin 16 gradually from 7V, measure voltage at pin 16 when the voltage supplied to pin 12 decreases by 0.3V in three conditions that data on ABL point is set at minimum, center and maximum values respectively. (Vab1l, Vab1pc, Vab1ph)

(1) Input TG7 sine wave signal (f=4MHz, video amplitude = 0.5V) to pin 31 (Y2 IN).  
(2) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(3) Measure video amplitude at pin 12. (Vact1)  
(4) Measure DC voltage at pin 16 (ABCL).  
(5) Supply pin 16 with a voltage that the voltage measured in the above step 4 minus 2V.  
(6) Measure video amplitude at pin 12 (Vact2) and its ratio to the amplitude measured in the above step 3.  
 $Vact \approx 20\log(Vact2/Vact1)$

(1) Short circuit pin 31 (Y2 IN), pin 34 (R-Y IN) and pin 33 (B-Y IN) in AC coupling.  
(2) Input 0.3V synchronizing signal to pin 51 (Sync IN).  
(3) Set bus data on brightness at maximum and measure video DC voltage at pin 12 (Vmax).  
(4) Measure voltage at pin 16 which is being supplied with the voltage measured in the step 5 of the preceding Note 75.  
(5) Changing setting of bus data on ABL gain at minimum, center and maximum values one after another, measure video DC voltage at pin 12. (Vab1l, Vab12, Vab13)  
(6) Find respective differences of Vab1l, Vab12 and Vab13 from the voltage measured in the above step 3.  
 $Vab1l = Vmax - Vab1l$   
 $Vab1c = Vmax - Vab12$   
 $Vab1h = Vmax - Vab13$

SECCAM SECTION		TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , F <sub>SC</sub> V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25±3°C)																MEASURING METHOD	
NOTE	ITEM	BUS : TEST MODE								BUS : NORMAL CONTROL MODE									
		S 02H	07H	0FH				10H				1FH							
		26	D4	D3	D2	D7	D5	D4	D4	D7	D5	D4	D3	D2	D1	D0			
S1	Bell Monitor Output Amplitude	ON	0	1	0	0	0	0	1	0	0	0	0	0	0	0	0	1	
S2	Bell Filter f <sub>0</sub>	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	Vari-Vari- able able		
S3	Bell Filter f <sub>0</sub> Variable Range	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	Note S <sub>2</sub> .		
S4	Bell Filter Q	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	(1) The same procedure as the steps 1 and 2 of the Note S <sub>2</sub> .		
S5	Color Difference Output Amplitude	OFF	—	—	—	—	—	—	—	—	—	—	—	—	—	—	(2) Measure f <sub>0</sub> BEL in different condition that SUB (F) D1D0=(00) or (11), and find difference of each measurement result from 4.286MHz as f <sub>0</sub> B-L or f <sub>0</sub> B-H.		
S6	Color Difference Relative Amplitude	↑	—	—	—	—	—	—	—	—	—	—	—	—	—	—	(1) The same procedure as the step 1 of the Note S <sub>2</sub> .		
																	(2) While monitoring output signal of pin 36 with network analyzer, measure Q of bell frequency characteristic as Q <sub>BEL</sub> . $Q_{BEL} = (Q_{MAX} - 3dB \text{ band width})/f_{0BEL}$		
																	(1) Input 20mV <sub>p-p</sub> (R-Y ID), 75% chroma color bar signal (SECAM system) to pin 42.		
																	(2) Measure color difference levels VRS and VBS with signals of pin 35 and pin 36.		
																	(3) Calculate relative amplitude from VRS/VBS.		

NOTE	ITEM	TEST CONDITION (unless otherwise specified : H, RGB V <sub>CC</sub> =9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> =5V ; Ta = 25 ± 3°C)														MEASURING METHOD														
		BUS : TEST MODE				BUS : NORMAL CONTROL MODE				MEASURING METHOD																				
		S	02H	07H	0FH	10H	1FH	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>7</sub>	D <sub>4</sub>	D <sub>5</sub>	D <sub>6</sub>	D <sub>0</sub>	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	D <sub>4</sub>	D <sub>5</sub>	D <sub>6</sub>	D <sub>0</sub>	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	D <sub>4</sub>	D <sub>5</sub>	D <sub>6</sub>	D <sub>0</sub>	
S <sub>7</sub>	Color Difference Attenuation Quantity	OFF	—	—	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
S <sub>8</sub>	Color Difference S/N Ratio	↑	—	—	—	—	—	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
S <sub>9</sub>	Linearity	↑	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—


(1) The same procedure as the steps 1 and 2 of the Note S<sub>5</sub>.  
(2) In the condition that SUB (IF) D<sub>6</sub>=1, measure amplitudes of color difference signals of pin 35 and pin 36 as VRSA and VBSA respectively, and find SATR and SATTB from measurement results.  
SATTR = 20log (VRSA / VRS),  
SATTB = 20log (VBSA / VBS).

(1) The same procedure as the steps 1 and 2 of the Note S<sub>5</sub>.  
(2) input non-modulated 200V<sub>p-p</sub> (R-Y) chroma signal to pin 42.  
(3) Measure noise amplitude nR and nB (mV<sub>p-p</sub>) appearing in color difference signals of pin 35 and pin 36 respectively.  
(4) Find S/N ratio by the following equation.  
SNBS=20log (2 × VBS / nB × 10E - 3)  
SNRS=20log (2 × VRS / nR × 10E - 3)

(1) The same procedure as the step 1 of the Note S<sub>5</sub>.  
(2) Measure and calculate amplitude of black bar levels in output waveforms of pin 35 and pin 36 as shown below.  
LinB=V [cyan] / V [red]  $\left( \begin{array}{l} \text{Maximum positive} \\ \text{negative amplitudes in} \\ \text{respective axes} \end{array} \right)$   
LinR=V [yellow] / V [blue]

NOTE	ITEM	TEST CONDITION (Unless otherwise specified : H, RGB V <sub>CC</sub> = 9V ; V <sub>DD</sub> , Fsc V <sub>DD</sub> , Y/C V <sub>CC</sub> = 5V ; T <sub>a</sub> = 25 ± 3°C)								MEASURING METHOD	
		BUS : TEST MODE				BUS : NORMAL CONTROL MODE					
	S	02H	07H	0FH	10H	1FH	D4 D <sub>3</sub> D <sub>2</sub> D <sub>1</sub>	D <sub>7</sub> D <sub>5</sub> D <sub>4</sub> D <sub>3</sub>	D <sub>7</sub> D <sub>6</sub> D <sub>5</sub> D <sub>4</sub>	D <sub>3</sub> D <sub>2</sub> D <sub>1</sub> D <sub>0</sub>	
S10	Rising-Fall Time (Standard De- Emphasis)	OFF	--	--	0	0	0	0	0	0	0
S11	Rising-Fall Time (Wide-Band De- Emphasis)	↑	--	--	↑	↑	↑	↑	↑	↑	↑
S12	Killer Operation Input Level (Standard Setting)	↑	--	--	↑	↑	↑	↑	↑	↑	↑
S13	Killer Operation Input Level (VID ON)	↑	--	--	↑	↑	↑	↑	↑	↑	↑
S14	Killer Operation Input Level (Low Sensitivity, VID OFF)	↑	--	--	↑	↑	↑	↑	↑	↑	↑


(1) The same procedure as the step 1 of the Note S5.  
(2) Measure output waveforms of pin 35 and pin 36 to find the period between the two points shown in the figure in time.




(3) In the condition that SUB (IF) D<sub>5</sub> = 1, perform the same measurement as the above step 2. Measurement results are expressed as t<sub>FBW</sub> and t<sub>RW</sub>.

(1) Input 200mV<sub>p-p</sub> (R-Y ID) standard 75% color bar signal (SECAM system) to pin 42.  
(2) Attenuate the input signal to pin 42. Measure R-Y ID signal level at pin 42 that turns on/off the killer as eSK and eSC.  
(3) In the condition that SUB (IF) D<sub>3</sub> = 1, perform the same measurement as the above step 2 and express the measurement results as eSFK and eSFC.  
(4) In the condition that SUB (IF) D<sub>3</sub> = 0, D<sub>2</sub> = 1, perform the same measurement as the above step 2 and express the measurement results as eSWK and eSWC.

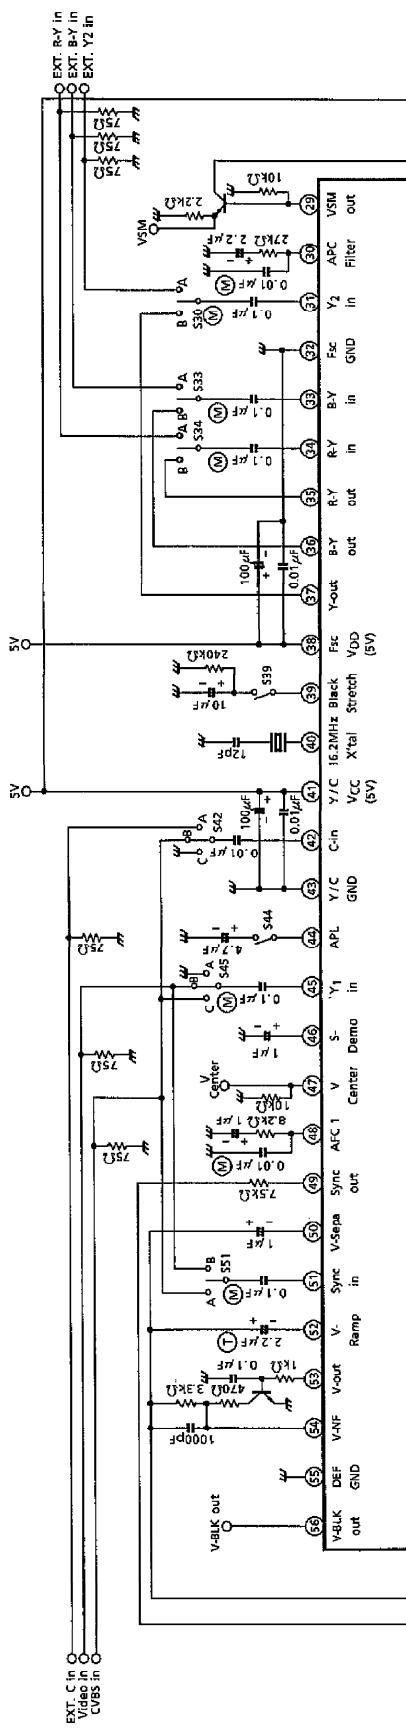TEST CIRCUIT




TB1227BN

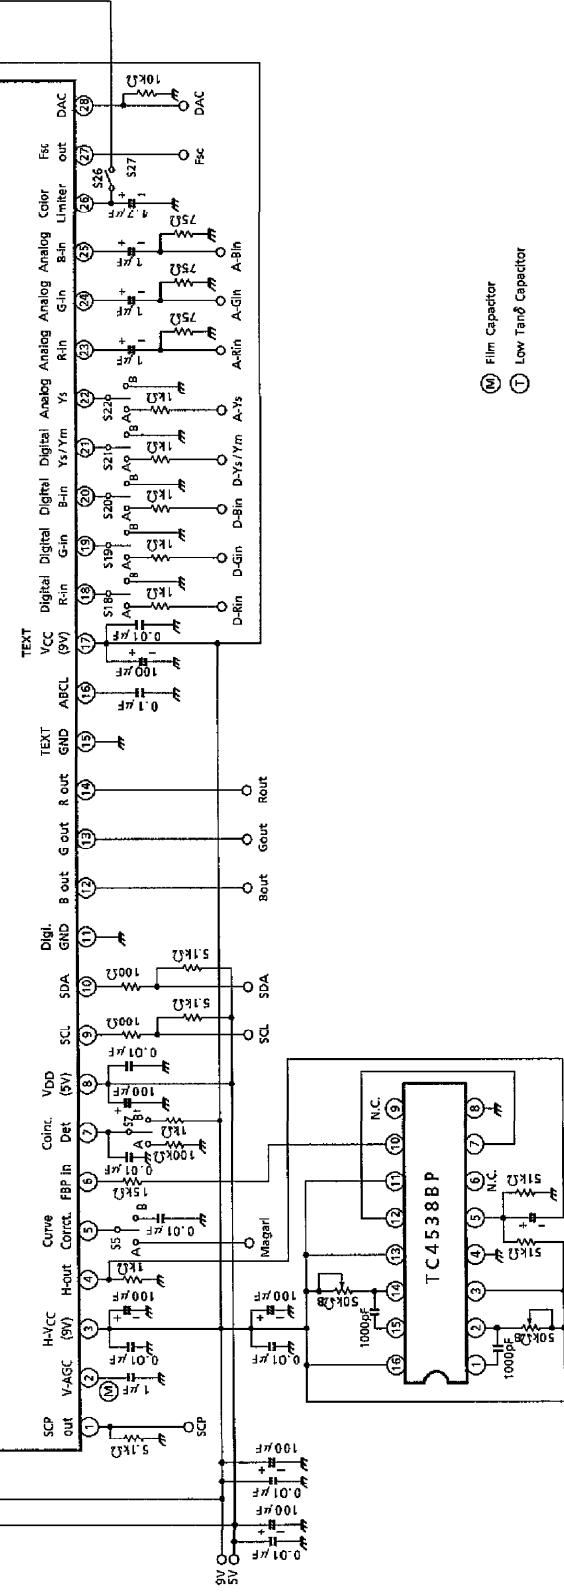


### ① Low Tan $\delta$ Capacitor

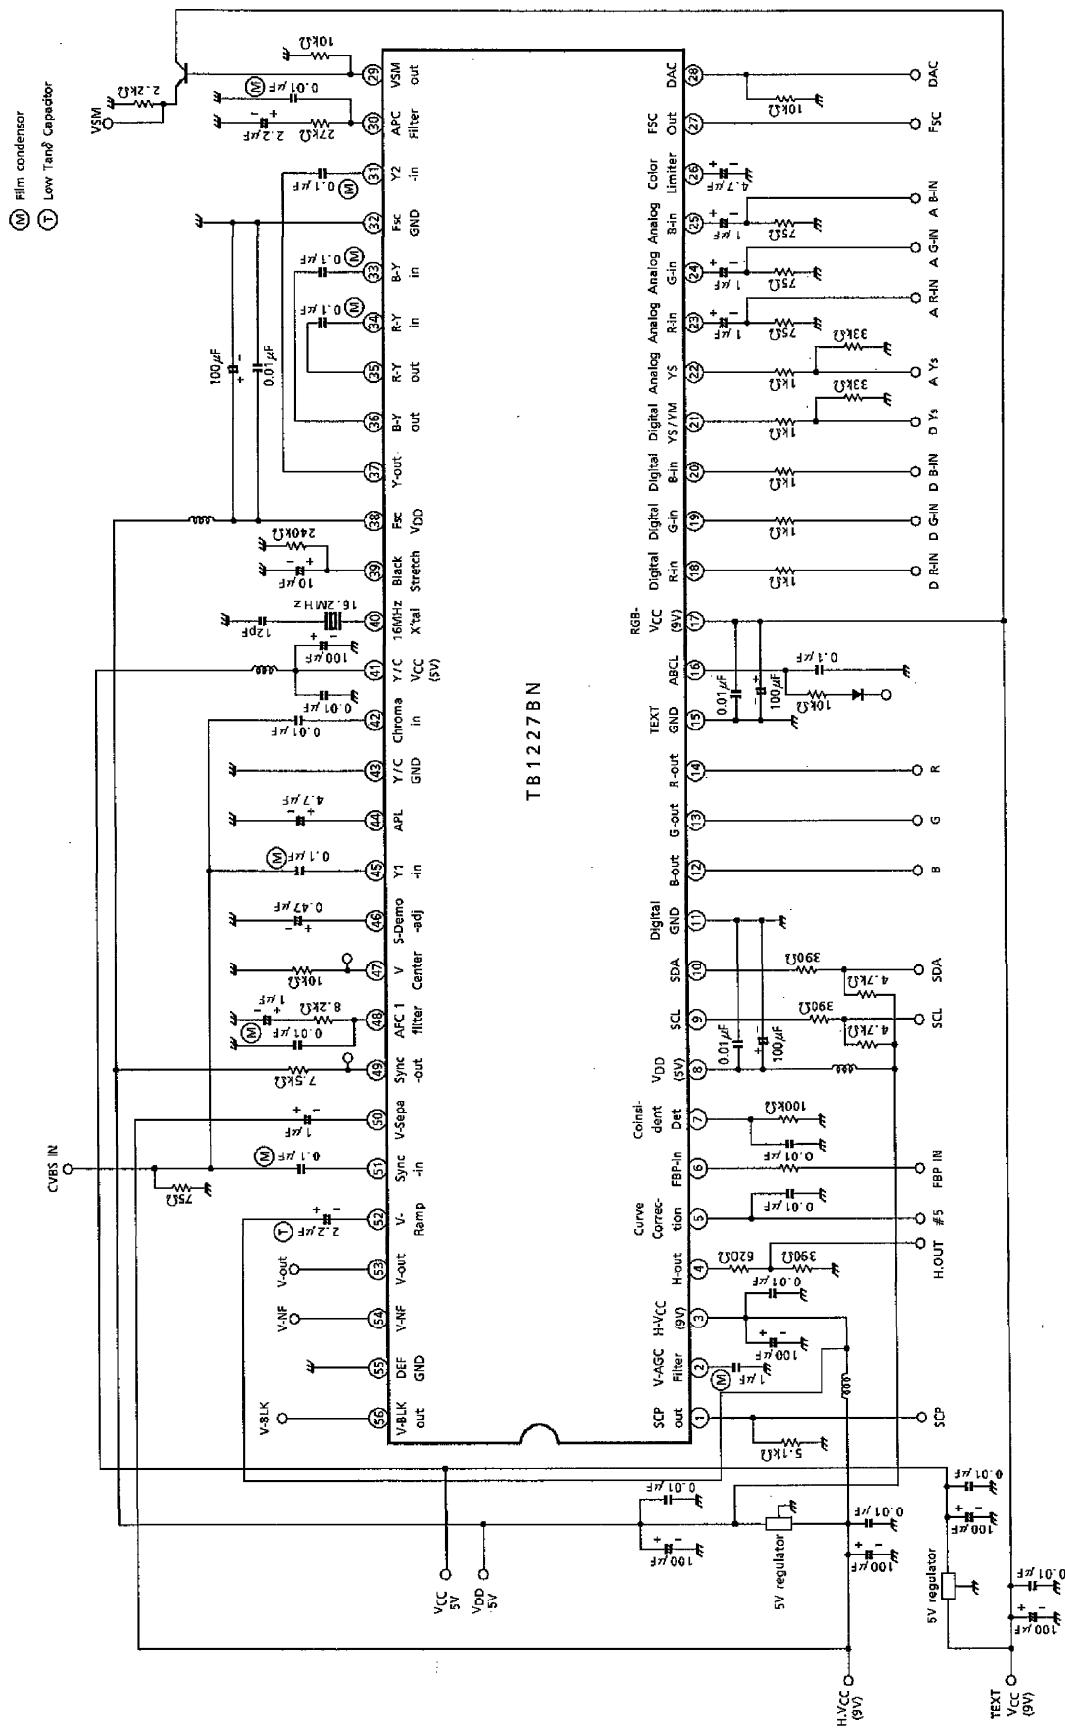APPLICATION CIRCUIT



**PACKAGE DIMENSIONS**  
SDIP56-P-600-1.78

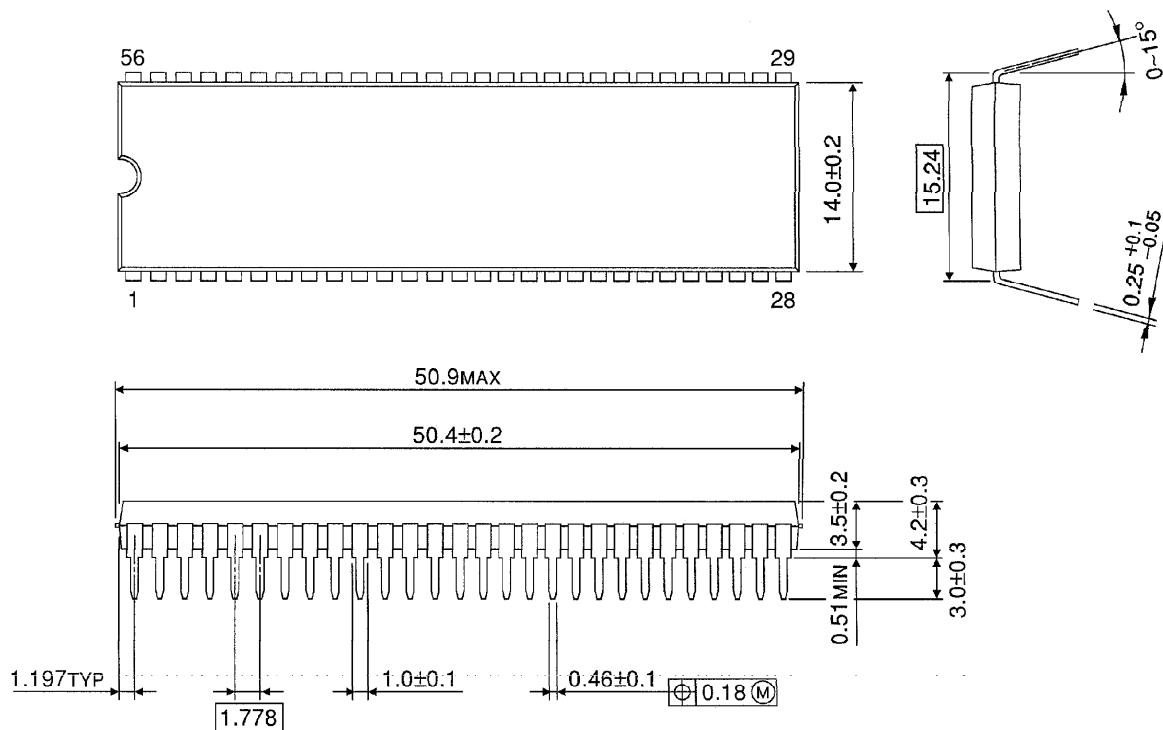Unit : mm



Weight : 5.55g (Typ.)

## RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.