


PCB LAYOUT



Specifications


1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 60V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 100V DC
5. Withstanding Voltage : 150V AC for one minute
6. Operating Temperature Range : -55°C to +85°C

Material and Plating

- 1.Housing : LCP (Natural Color)UL94V-0
- 2.Contact : Phosphor Bronze
- 3.Plating : 1u" Gold Flash

How To Order

B2M065-52G-550

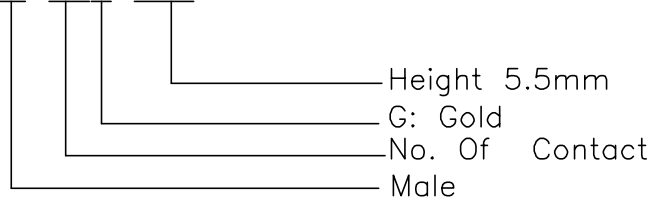

****Mating Dimension**

P/N(Male)	P/N(Female)	Male Height Dim A1	Mating Height Dim B1
B2M065-52G-550	B2F065-52G-390	5.5	5.0

				DRAWN: Jeremy Liu	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			
				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 0.65mm Board To Board	SIZE	
				APPROVAL: Mike Wu	SCALE:5:1	5.50mm Height Male	A4	
A	17-Jan-2004	2065P-52G-550	Jeremy Liu		SHEET: 1 / 1	PART NO:		B2M065-52G-550
REV	DATE	FILE	BY		PROJECTION:			