

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

# TA2069AF

## 3 V STEREO HEADPHONE AMPLIFIER (3 V USE)

The TA2069AF is developed for play-back stereo headphone equipments (3 V USE). It is built in dual preamplifiers, dual OCL power amplifiers, motor governor, DC volume control and volume limiter etc.


### FEATURES

- Built-in preamplifier  
Input coupling condenser-less  
Built-in input capacitor for reducing buzz noise  
Low noise :  $V_{ni} = 1.2 \mu V_{rms}$  (Typ.)
- Built-in power amplifier  
OCL (Output condenser-less)  
Voltage gain :  $G_V = 31 \text{ dB}$  (Typ.)
- Built-in motor governor  
Current proportion type
- Built-in DC volume control function  
DC volume maximum attenuation :  $ATT = 82 \text{ dB}$  (Typ.)
- Built-in volume limiter function
- Built-in bass boost function
- Low supply current ( $V_{CC} = 3 \text{ V}$ ,  $f = 1 \text{ kHz}$ ,  $T_a = 25^\circ\text{C}$ , Typ.)  
PRE + PW

|                   | No Signal | Output Power |            |
|-------------------|-----------|--------------|------------|
|                   |           | 0.1 mW × 2   | 0.5 mW × 2 |
| $R_L = 16 \Omega$ | 9.5 mA    | 14.2 mA      | 19.5 mA    |
| $R_L = 32 \Omega$ | 9.5 mA    | 12.5 mA      | 16.5 mA    |


GVN :  $I_{CC} = 2.5 \text{ mA}$

- Operating supply voltage range ( $T_a = 25^\circ\text{C}$ )  
PRE + PW :  $V_{CC}(\text{opr}) = 1.8 \sim 3.6 \text{ V}$   
GVN :  $V_{CC}(\text{opr}) = 2.1 \sim 3.6 \text{ V}$  (Motor Voltage = 1.8 V)

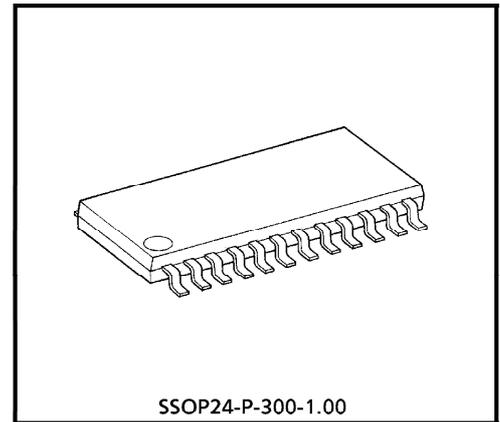

Weight : 0.32 g (Typ.)

BLOCK DIAGRAM

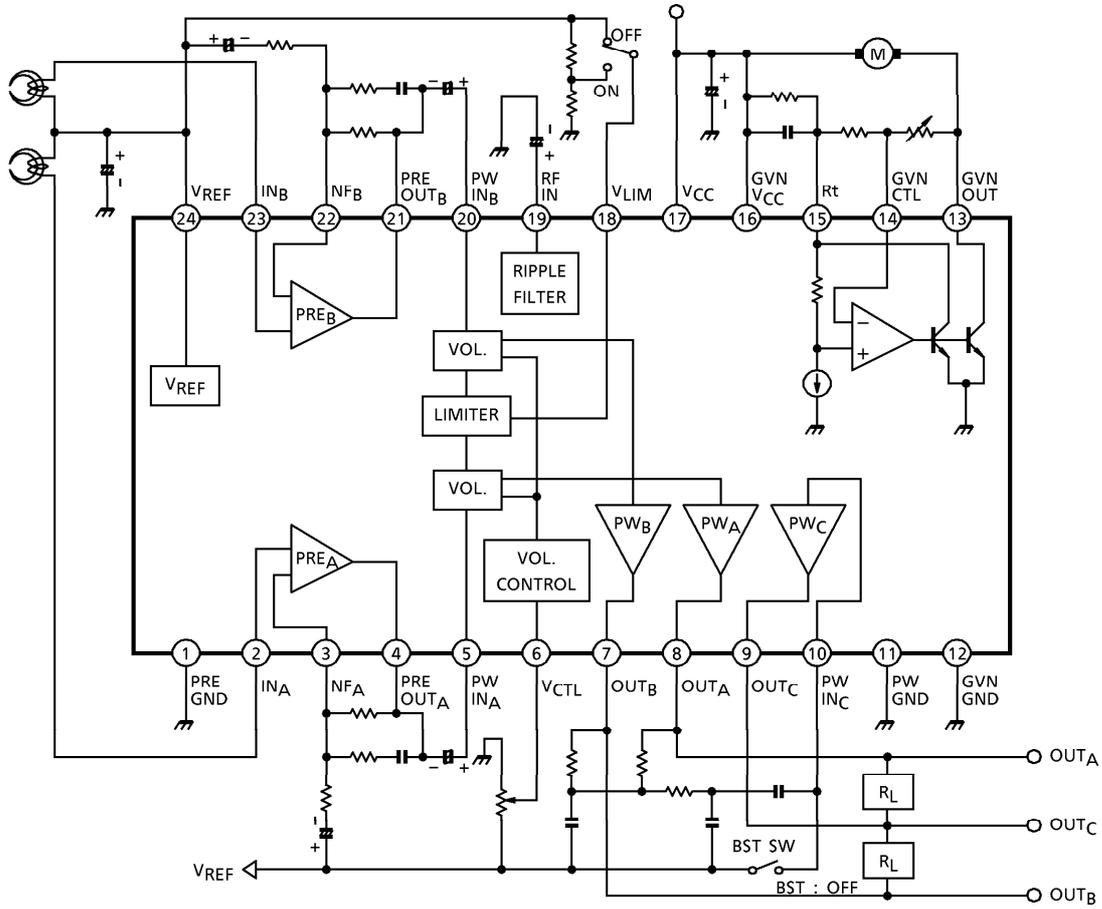

**TERMINAL EXPLANATION**

TERMINAL VOLTAGE : Typical terminal voltage at no signal with test circuit ( $V_{CC} = 3\text{ V}$ ,  $T_a = 25^\circ\text{C}$ )

| TERMINAL |                      | FUNCTION                                                                                                                                                       | INTERNAL CIRCUIT | TERMINAL VOLTAGE (V) |
|----------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------|
| No.      | NAME                 |                                                                                                                                                                |                  |                      |
| 1        | PRE GND              | The GND, except for power drive stage and motor governer stage.                                                                                                | —                | 0                    |
| 2        | IN <sub>A</sub>      | Input of preamplifier                                                                                                                                          |                  | 1.2                  |
| 23       | IN <sub>B</sub>      |                                                                                                                                                                |                  | 1.2                  |
| 3        | NFA                  |                                                                                                                                                                |                  | NF of preamplifier   |
| 22       | NFB                  |                                                                                                                                                                |                  |                      |
| 4        | PRE OUT <sub>A</sub> | Output of preamplifier                                                                                                                                         |                  | 1.2                  |
| 21       | PRE OUT <sub>B</sub> |                                                                                                                                                                |                  |                      |
| 5        | PW IN <sub>A</sub>   | Input of power amplifier                                                                                                                                       |                  | 1.2                  |
| 20       | PW IN <sub>B</sub>   |                                                                                                                                                                |                  |                      |
| 6        | V <sub>CTL</sub>     | The terminal of DC volume control<br><ul style="list-style-type: none"> <li>This terminal can be used also for V<sub>LIM</sub> terminal.</li> </ul>            |                  | —                    |
| 18       | V <sub>LIM</sub>     | The terminal of volume limiter level control<br><ul style="list-style-type: none"> <li>This terminal can be used also for V<sub>CTL</sub> terminal.</li> </ul> |                  | —                    |
| 7        | OUT <sub>B</sub>     | Output of power amplifier                                                                                                                                      |                  | 1.2                  |
| 8        | OUT <sub>A</sub>     |                                                                                                                                                                |                  |                      |
| 9        | OUT <sub>C</sub>     |                                                                                                                                                                |                  |                      |

| TERMINAL |                     | FUNCTION                                                                                                                             | INTERNAL CIRCUIT | TERMINAL VOLTAGE (V) |
|----------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------|
| No.      | NAME                |                                                                                                                                      |                  |                      |
| 10       | PW IN <sub>C</sub>  | Input of center amplifier                                                                                                            |                  | 1.2                  |
| 11       | PW GND              | GND for power drive stage                                                                                                            | —                | 0                    |
| 12       | GVN GND             | GND for motor governor stage                                                                                                         | —                | 0                    |
| 13       | GVN OUT             | Motor terminal                                                                                                                       |                  | —                    |
| 14       | GVN CTL             | The terminal of motor speed control                                                                                                  |                  | —                    |
| 15       | Rt                  | The terminal of amateur compensation resistor                                                                                        |                  | —                    |
| 16       | GVN V <sub>CC</sub> | V <sub>CC</sub> for motor governor stage                                                                                             |                  | 3                    |
| 17       | V <sub>CC</sub>     | V <sub>CC</sub> for preamplifier stage and power amplifier stage.                                                                    | —                | 3                    |
| 19       | RF IN               | Ripple filter of power supply                                                                                                        |                  | 2.5                  |
| 24       | V <sub>REF</sub>    | Reference voltage<br><ul style="list-style-type: none"> <li>• Preamplifier and power amplifier operate on this reference.</li> </ul> |                  | 1.2                  |

## APPLICATION NOTE

1. V<sub>CC</sub> and GND

This IC has two V<sub>CC</sub> terminals and three GND terminals. Pattern layout should be designed carefully to reduce the common impedance.

V<sub>CC</sub>

- V<sub>CC</sub> (pin 17) : Preamplifier stage and power amplifier stage.  
 GVN V<sub>CC</sub> (pin 16) : Motor governor stage.

## GND

- PRE GND (pin 1) : Preamplifier stage and power amplifier stage except the power drive stage.  
 PW GND (pin 11) : Power drive stage of power amplifier.  
 GVN GND (pin 12) : Motor governor stage.

2. V<sub>REF</sub>

It is necessary to stabilize the V<sub>REF</sub> circuit, the internal circuit operate on this reference.

## 3. Preamplifier

Input signal should be applied to V<sub>REF</sub> standard, otherwise pop noise become bigger when V<sub>CC</sub> is turned on and off.

## 4. Power amplifier

It is necessary to insert the coupling capacitor through the PW IN terminal. In case that DC current or DC voltage is applied to the PW IN terminal, the internal circuit has unbalance and the power amplifier doesn't operate normally.

## MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC           | SYMBOL               | RATING   | UNIT |
|--------------------------|----------------------|----------|------|
| Supply Voltage           | V <sub>CC</sub>      | 4        | V    |
| Power Dissipation        | P <sub>D</sub>       | (Note 1) | 400  |
|                          |                      | (Note 2) | 925  |
| Output Current (PW AMP.) | I <sub>O</sub> (PW)  | 200      | mA   |
| Output Current (GVN)     | I <sub>O</sub> (GVN) | 700      | mA   |
| Operating Temperature    | T <sub>opr</sub>     | - 25~75  | °C   |
| Storage Temperature      | T <sub>stg</sub>     | - 55~150 | °C   |

(Note 1) IC only : Derated above Ta = 25°C in the proportion 3.2 mW/°C

(Note 2) IC + PCB (TOSHIBA typical PCB) : Derated above Ta = 25°C in the proportion 7.4 mW/°C

## ELECTRICAL CHARACTERISTICS

Unless otherwise specified,  $V_{CC} = 3\text{ V}$ ,  $T_a = 25^\circ\text{C}$ ,  $f = 1\text{ kHz}$ , SW2 : a, SW5 : a


Preamplifier :  $R_g = 2.2\text{ k}\Omega$ ,  $R_L = 10\text{ k}\Omega$ , SW1 : ON, SW3 : b, SW4 : b

Power amplifier :  $R_g = 600\ \Omega$ ,  $R_L = 16\ \Omega$ , VOL : MAX, SW1 : OPEN, SW3 : a, SW4 : a

Motor governor :  $I_m = 100\text{ mA}$ , SW1 : OPEN, SW3 : b, SW4 : b







|                               | CHARACTERISTIC                  | SYMBOL            | TEST CIRCUIT                                           | TEST CONDITION                                                                                                   | MIN. | TYP.  | MAX. | UNIT                |
|-------------------------------|---------------------------------|-------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|------|-------|------|---------------------|
|                               | Quiescent Supply Current        | $I_{CCQ}$         | —                                                      | PRE + PW + GVN<br>$V_{in} = 0$ , VOL : MIN, SW4 : b                                                              | —    | 12    | 18   | mA                  |
| PRE AMP.                      | Open Loop Voltage Gain          | $G_{VO}$          | —                                                      | $V_O = -10\text{ dBV}$ , SW2 : b                                                                                 | —    | 86    | —    | dB                  |
|                               | Closed Loop Voltage Gain        | $G_{VC}$          | —                                                      | $V_O = -10\text{ dBV}$                                                                                           | —    | 35    | —    | dB                  |
|                               | Maximum Output Voltage          | $V_{om}$          | —                                                      | THD = 1%                                                                                                         | 550  | 720   | —    | mV <sub>rms</sub>   |
|                               | Total Harmonic Distortion       | THD1              | —                                                      | $V_O = -10\text{ dBV}$                                                                                           | —    | 0.02  | 0.3  | %                   |
|                               | Equivalent Input Noise Voltage  | $V_{ni}$          | —                                                      | $R_g = 2.2\text{ k}\Omega$ , SW1 : OPEN<br>BPF = 20 Hz~20 kHz, NAB ( $G_V = 35\text{ dB}$ , $f = 1\text{ kHz}$ ) | —    | 1.2   | 2.4  | $\mu\text{V}_{rms}$ |
|                               | Cross Talk                      | CT1               | —                                                      | $V_O = -10\text{ dBV}$                                                                                           | —    | 70    | —    | dB                  |
|                               | Ripple Rejection Ratio          | RR1               | —                                                      | $f_r = 100\text{ Hz}$ , $V_r = -20\text{ dBV}$                                                                   | —    | 48    | —    | dB                  |
| POWER AMP.                    | Voltage Gain 1                  | $G_{V1}$          | —                                                      | $V_O = -10\text{ dBV}$                                                                                           | 29   | 31    | 33   | dB                  |
|                               | Channel Balance                 | CB                | —                                                      |                                                                                                                  | -1.5 | 0     | +1.5 | dB                  |
|                               | Voltage Gain 2                  | $G_{V2}$          | —                                                      | $V_O = -10\text{ dBV}$ , SW5 : b                                                                                 | —    | 5     | —    | dB                  |
|                               | Output Power 1                  | $P_{O1}$          | —                                                      | $R_L = 16\ \Omega$ , THD = 10%                                                                                   | 17   | 28    | —    | mW                  |
|                               | Output Power 2                  | $P_{O2}$          | —                                                      | $R_L = 32\ \Omega$ , THD = 10%                                                                                   | —    | 20    | —    | mW                  |
|                               | Total Harmonic Distortion       | THD2              | —                                                      | $P_O = 1\text{ mW}$                                                                                              | —    | 0.5   | —    | %                   |
|                               | Output Noise Voltage 1          | $V_{no1}$         | —                                                      | $R_g = 600\ \Omega$ , SW3 : b<br>BPF = 20 Hz~20 kHz                                                              | —    | 270   | 400  | $\mu\text{V}_{rms}$ |
|                               | Output Noise Voltage 2          | $V_{no2}$         | —                                                      | $R_g = 600\ \Omega$ , SW3 : b<br>SW5 : b, BPF = 20 Hz~20 kHz                                                     | —    | 45    | —    | $\mu\text{V}_{rms}$ |
|                               | Ripple Rejection Ratio          | RR2               | —                                                      | $f_r = 100\text{ Hz}$ , $V_r = -20\text{ dBV}$                                                                   | —    | 52    | —    | dB                  |
|                               | Cross Talk                      | CT2               | —                                                      | $V_O = -10\text{ dBV}$                                                                                           | —    | 32    | —    | dB                  |
| DC Volume Maximum Attenuation | ATT                             | —                 | $V_O = -10\text{ dBV}$<br>SW4 : a→b<br>(VOL : MAX→MIN) | —                                                                                                                | 82   | —     | dB   |                     |
| MOTOR GOVERNOR                | Supply Current                  | $I_{CC}$          | —                                                      | $I_m = 0$                                                                                                        | —    | 2.5   | 4.3  | mA                  |
|                               | Saturation Voltage              | $V_{CE(sat)}$     | —                                                      | $I_m = 200\text{ mA}$                                                                                            | —    | —     | 0.5  | V                   |
|                               | Reference Voltage               | $V_{REF}$         | —                                                      | $I_m = 100\text{ mA}$                                                                                            | 0.76 | 0.81  | 0.86 | V                   |
|                               | Reference Voltage Fluctuation 1 | $\Delta V_{REF1}$ | —                                                      | $V_{CC} = 2.1\sim 3.6\text{ V}$                                                                                  | —    | 0.25  | —    | % / V               |
|                               | Reference Voltage Fluctuation 2 | $\Delta V_{REF2}$ | —                                                      | $I_m = 25\sim 250\text{ mA}$                                                                                     | —    | 0.003 | —    | % / mA              |
|                               | Reference Voltage Fluctuation 3 | $\Delta V_{REF3}$ | —                                                      | $T_a = -25\sim 75^\circ\text{C}$                                                                                 | —    | 0.005 | —    | % / °C              |
|                               | Current Ratio                   | K                 | —                                                      |                                                                                                                  | 34.5 | 37.5  | 40.5 |                     |
|                               | Current Ratio Fluctuation 1     | $\Delta K1$       | —                                                      | $V_{CC} = 2.1\sim 3.6\text{ V}$                                                                                  | —    | 0.25  | —    | % / V               |
|                               | Current Ratio Fluctuation 2     | $\Delta K2$       | —                                                      | $I_m = 25\sim 250\text{ mA}$                                                                                     | —    | 0.08  | —    | % / mA              |
|                               | Current Ratio Fluctuation 3     | $\Delta K3$       | —                                                      | $T_a = -25\sim 75^\circ\text{C}$                                                                                 | —    | 0.005 | —    | % / °C              |







TEST CIRCUIT






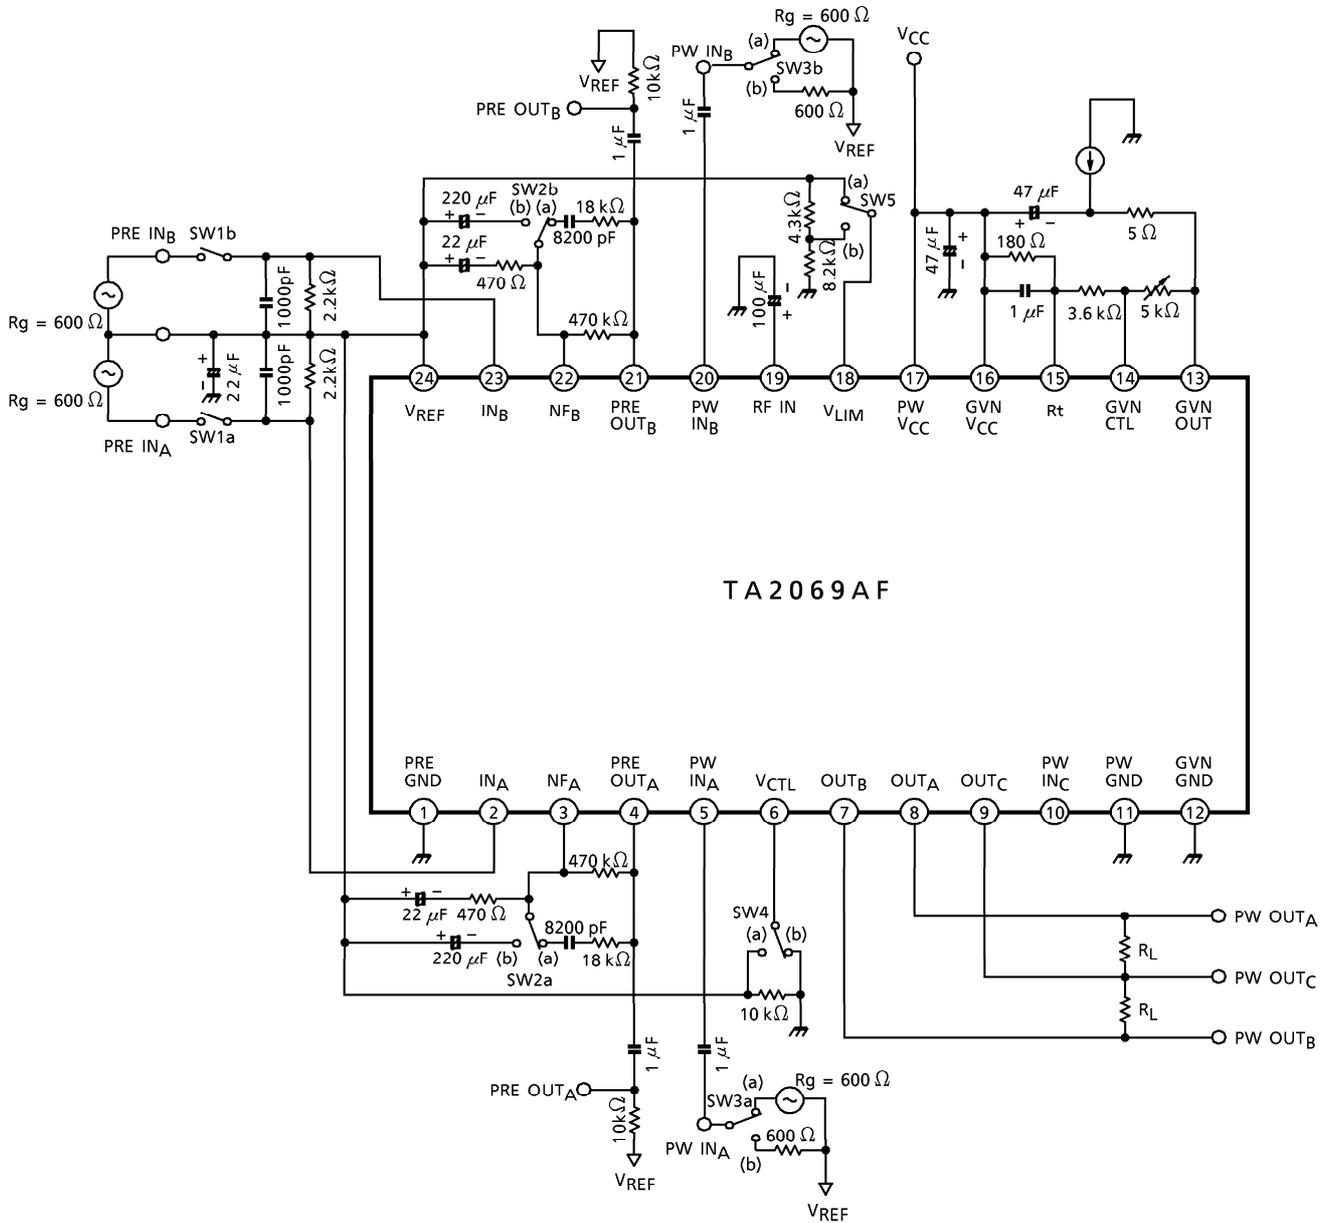








CHARACTERISTIC CURVES

Unless otherwise specified  $V_{CC} = 3\text{ V}$ ,  $T_a = 25^\circ\text{C}$ ,  $f = 1\text{ kHz}$   
 Preamplifier :  $R_g = 2.2\text{ k}\Omega$ ,  $R_L = 10\text{ k}\Omega$   
 Power amplifier :  $R_g = 600\ \Omega$ ,  $R_L = 16\ \Omega$ ,  $\text{Vol} = \text{MAX.}$   
 Motor governor :  $I_m = 100\text{ mA}$

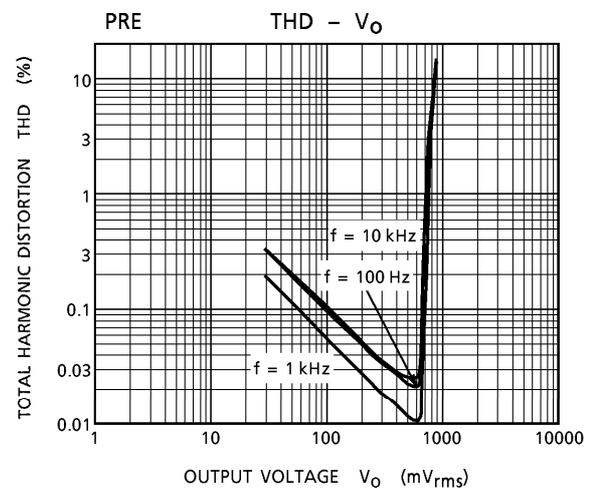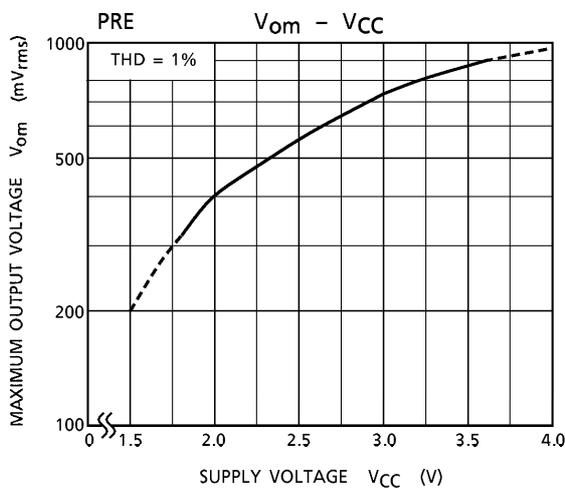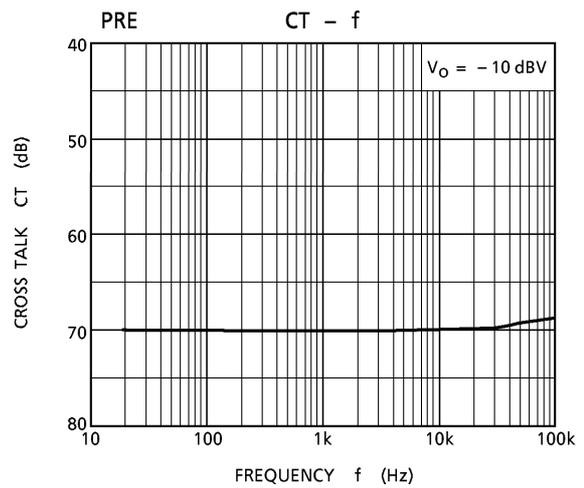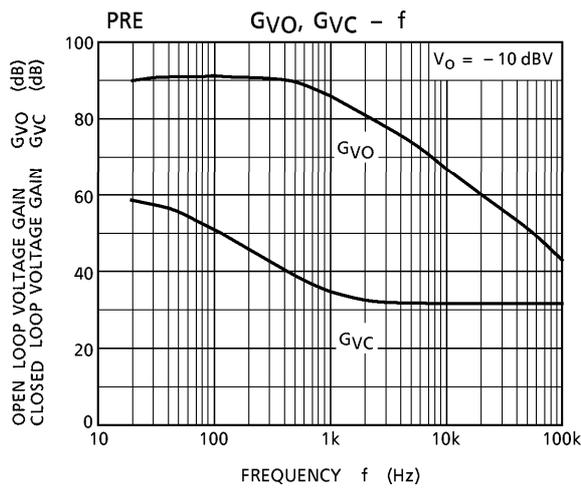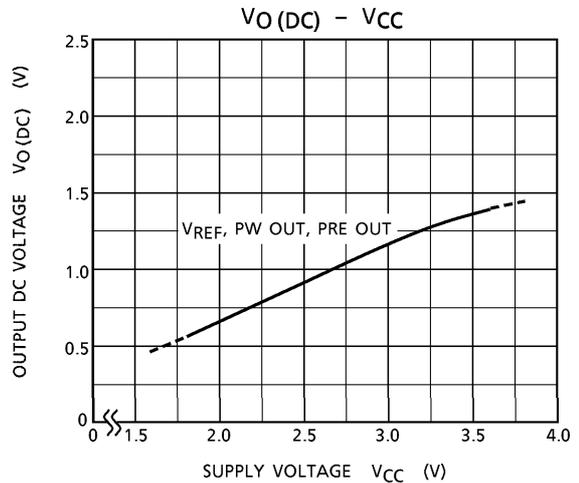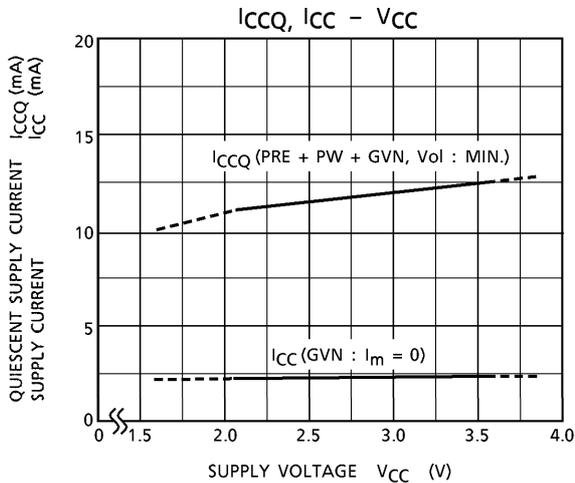

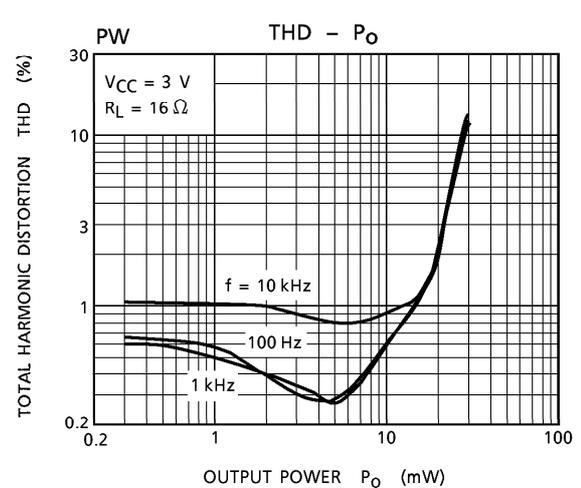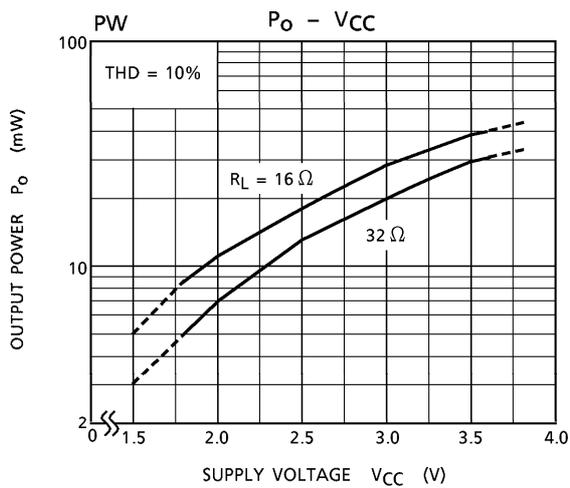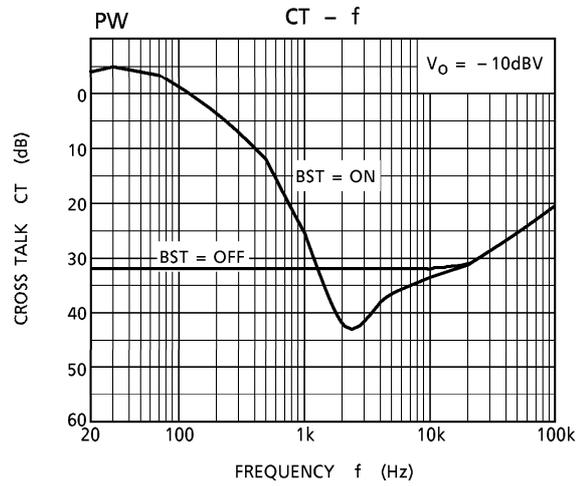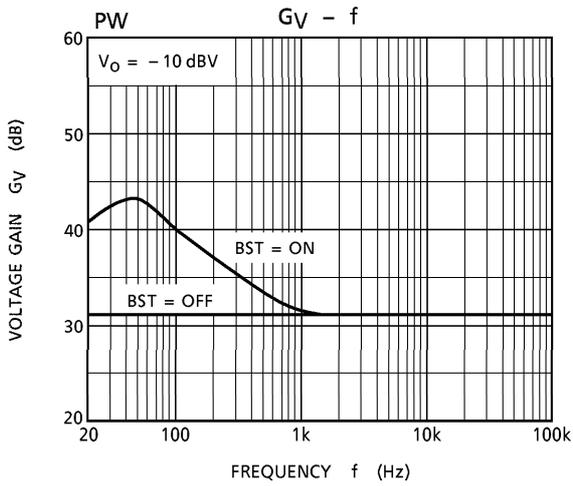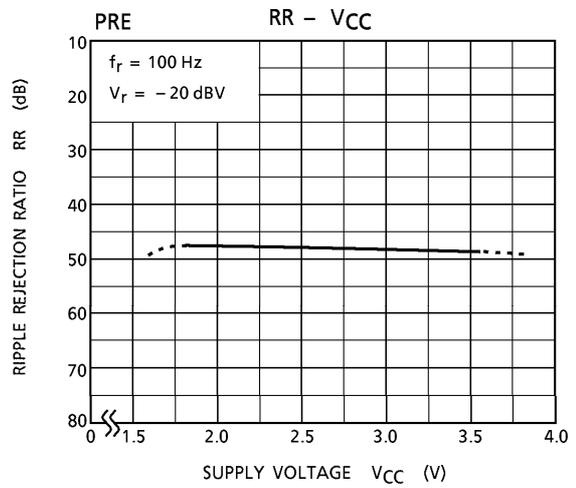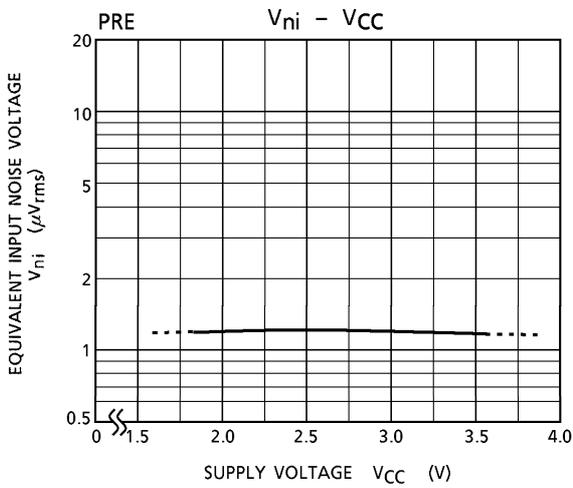

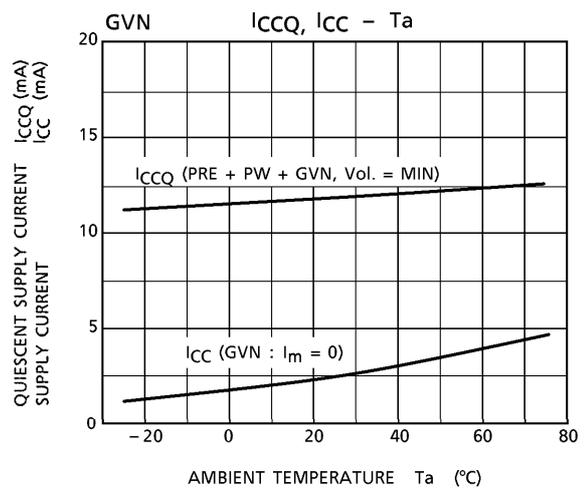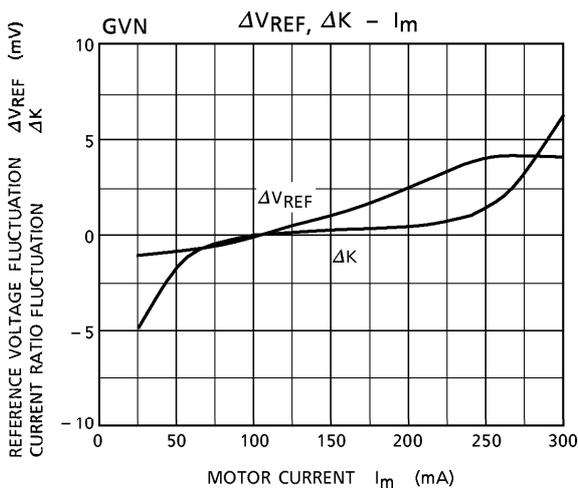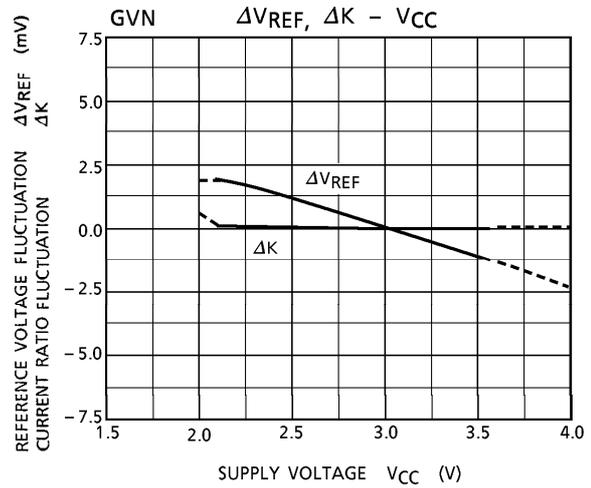
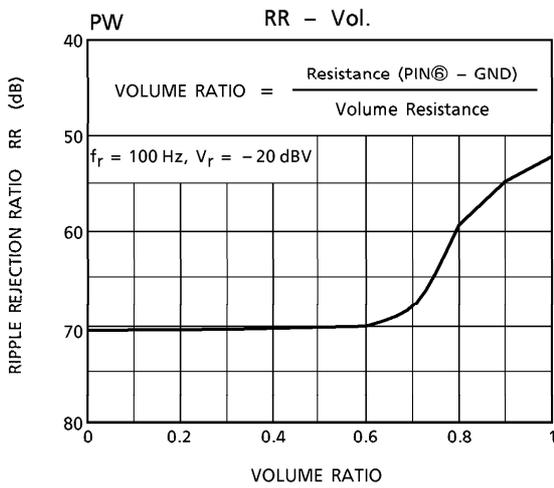
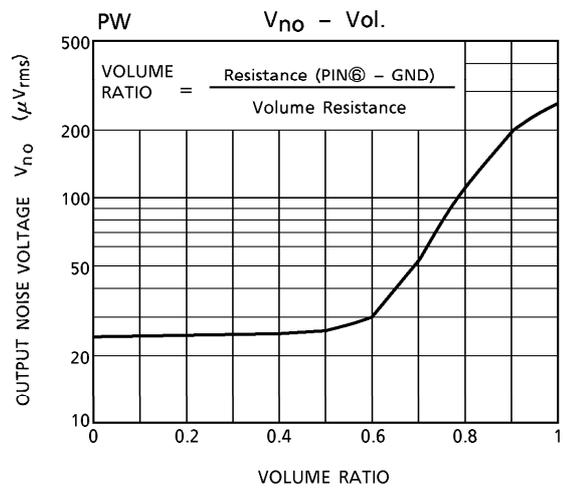
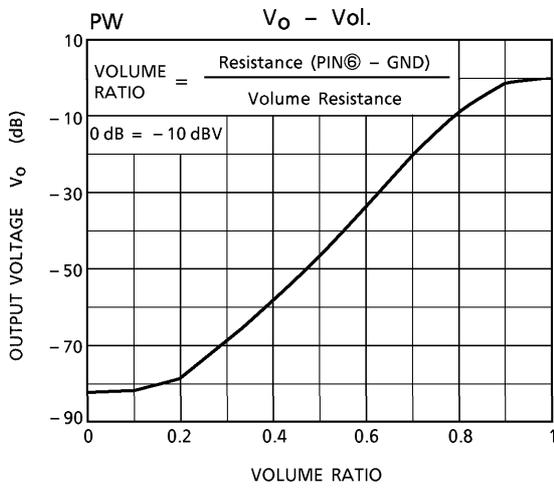


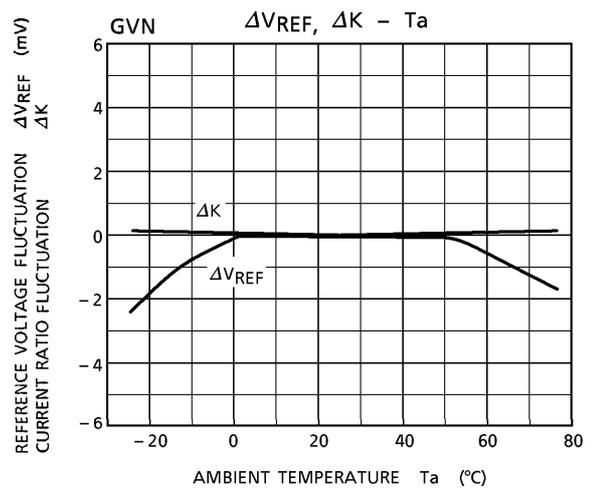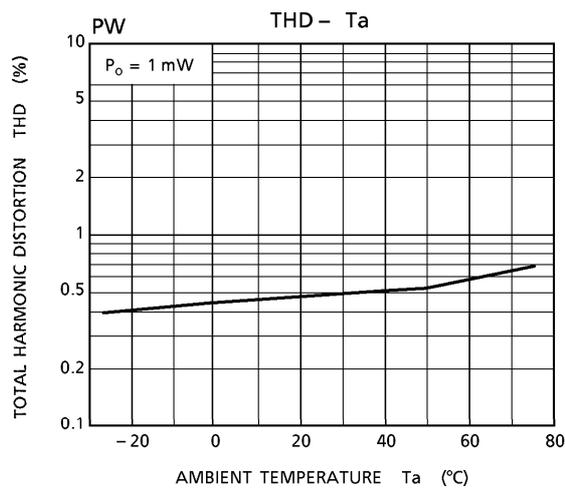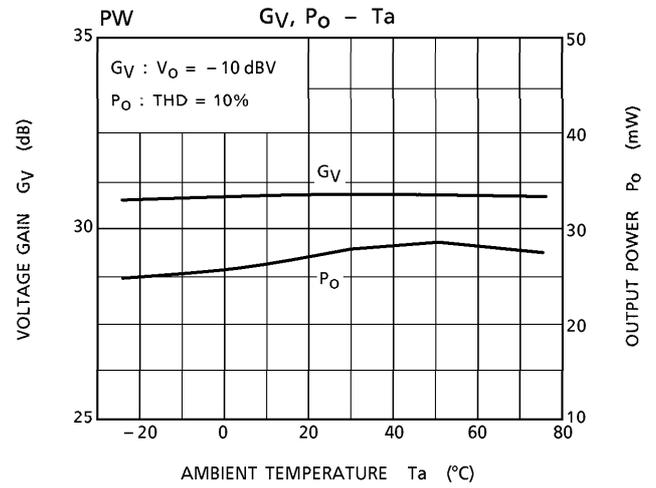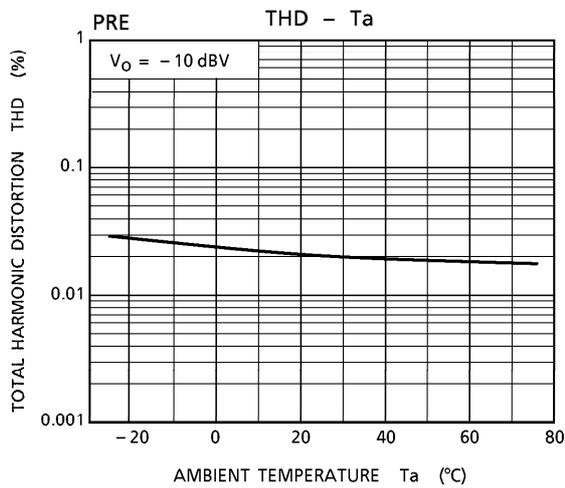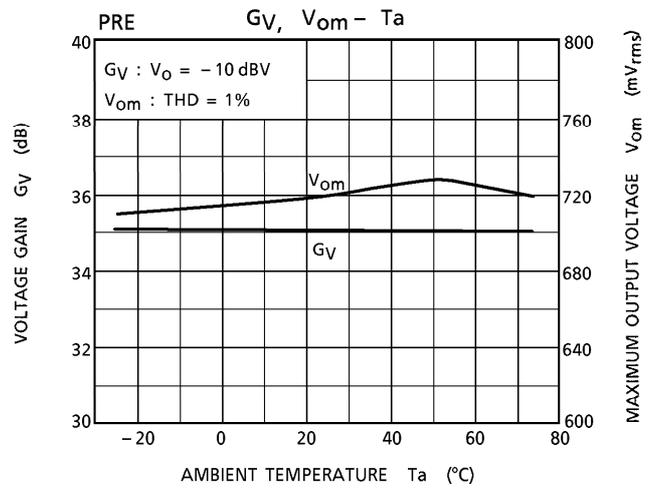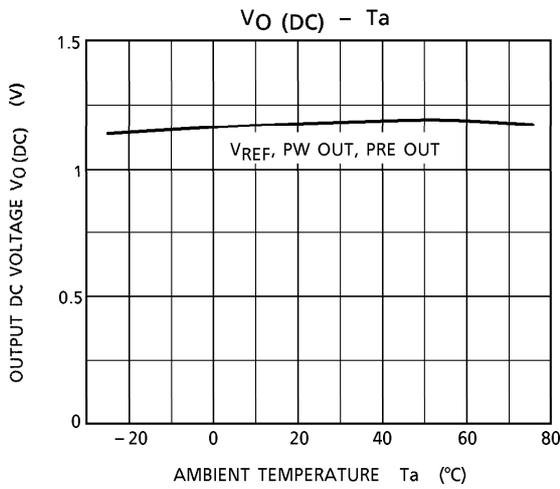



**PACKAGE DIMENSIONS**  
SSOP24-P-300-1.00

Unit : mm

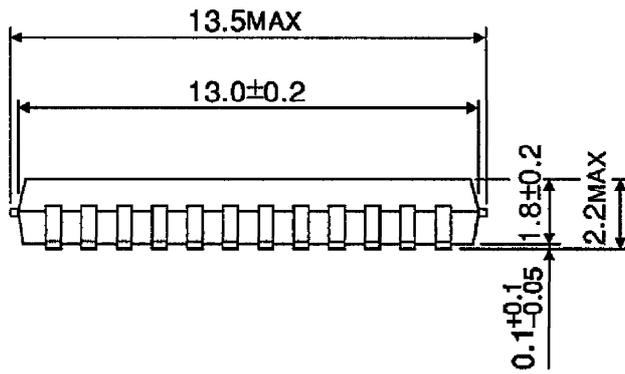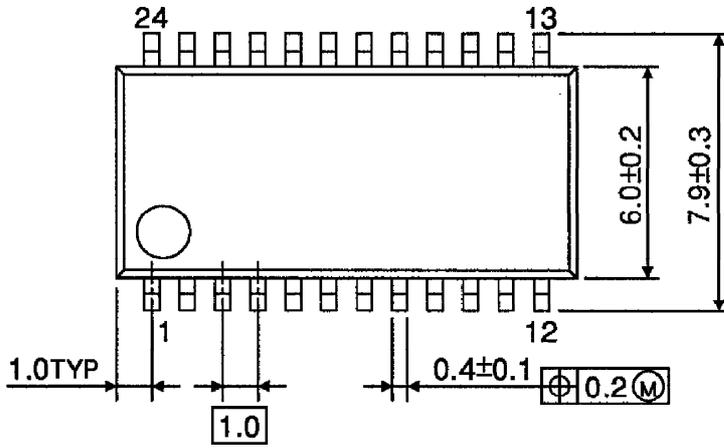

Weight : 0.32 g (Typ.)

**RESTRICTIONS ON PRODUCT USE**

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.