

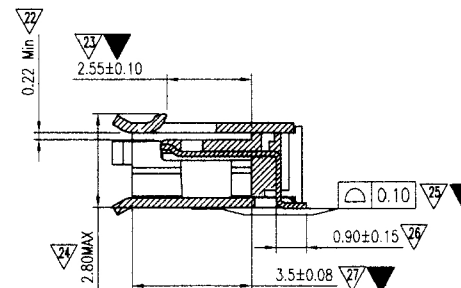
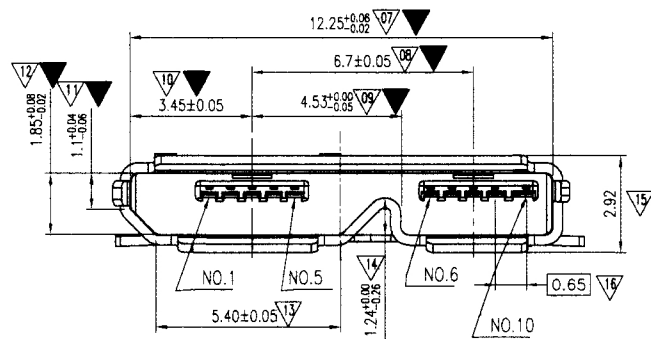



版 本 REV.	變 更 內 容 MODIFIXATION	日 期 DATE	修 改 DRAW
A0		2010\01\05	LIU

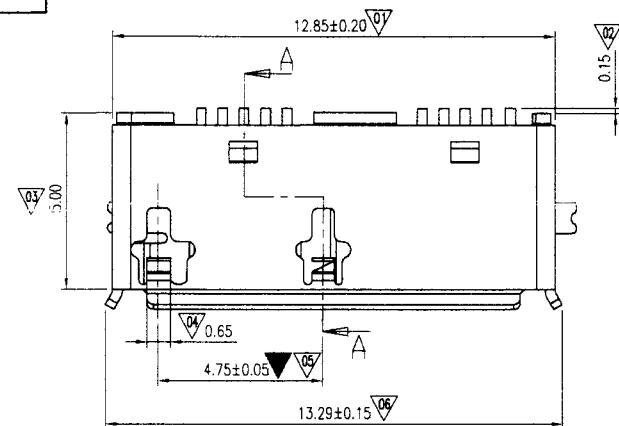


A-A

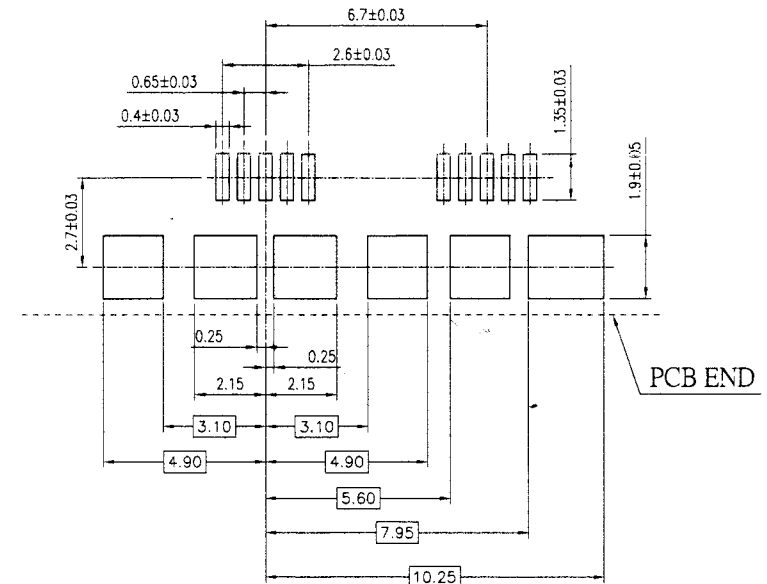

RECOMMENDED PCB LAYOUT

NOTES:

1. INSULATOR: LCP . COLOR-BLACK
2. USB CONTACT: BRASS 0.15mm THICKNESS, SELECTIVE GOLD. PLATED ON CONTACT AREA, GOLD FLASH PLATED ON SOLDER TAIL, 80 U" MIN. NICKEL UNDERPLATED OVERALL.
3. SHELL: STAINLESS STEEL ,0.3mm THICKNESS, GOLD FLASH PLATED ON THE SOLDERING TAB.

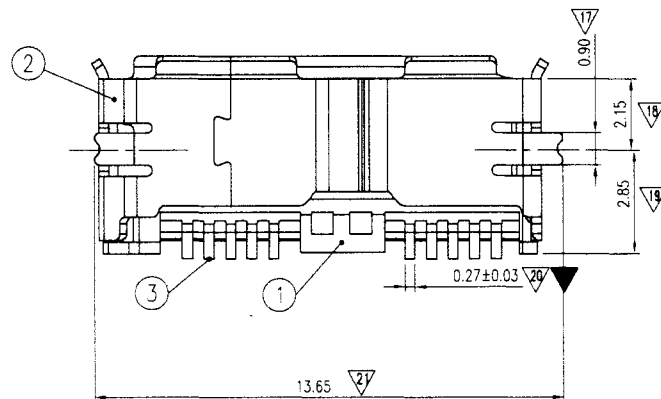

PART NO:		MATERIAL:	
MODEL NO:		FINISH:	
UNIT: mm	SIZE: A4	COLOR:	
TOLERANCE UNSPECIFIED		DR:	
.x	±0.25	PART NAME: MICRO USB 3.0-B SMT TYPE	
.xx	±0.20	DWG NO: TY0002	
.xxx	±0.15	REV: A0	
ANG.	±5°	APP:	
		SCALE: 1:1	SHEET: 1 of 1