

Programmable Operator Interface

MONITOUCH



MONITOUCH Meeting Every Level of Your Automation Needs V9 Series

Advanced High Resolution Widescreen LCD with Wireless LAN



Standard High Performance Model




Lite Basic Model




TECHNOSHOT Series

The Ultimate Combination of Performance and Price

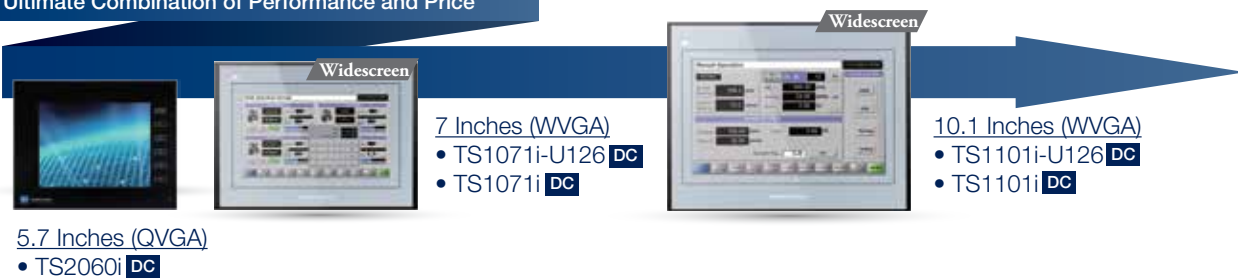

V9 Hygiene Series

Fuji Electric HMI displays allow you to maintain the hygiene of the panel surface, contributing to a cleaner environment where it matters the most. By creating a flat, seamless panel surface, there are no crevices for dust and bacteria to accumulate.

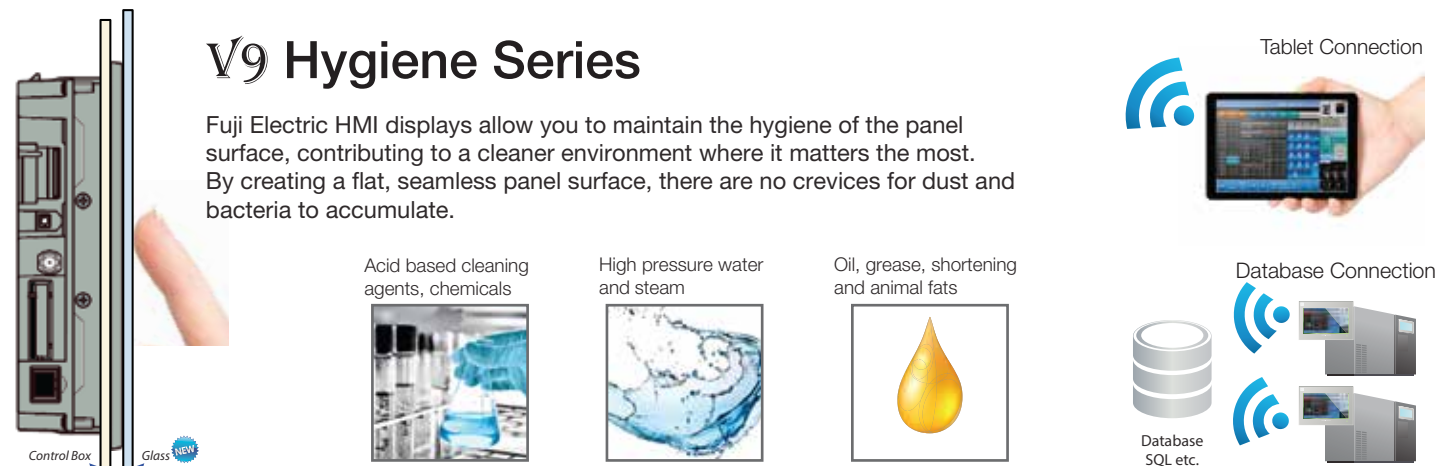


V-SFT Ver.6

- One Programming Software for All Models
- Free Upgrade from Website
- Program Compatible with Legacy Models

Standard Features


- Video Player
- Tag Editor and Tag Database
- Powerful Macro Scripting
- 8-Way Communication
- MES Incorporated
- Sampling & Alarming
- Recipe
- Multi Language
- Operation Log
- Security

Path-Through Programming

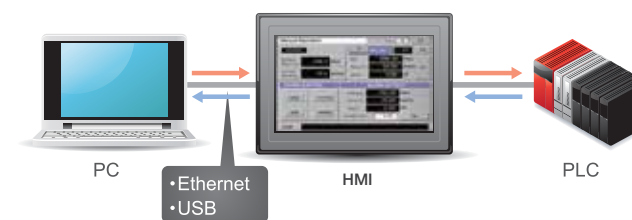


Fuji Electric's HMI allows you to write/read PLC ladder programs to/from your PC through Ethernet or USB connection.

FTP Server / Client

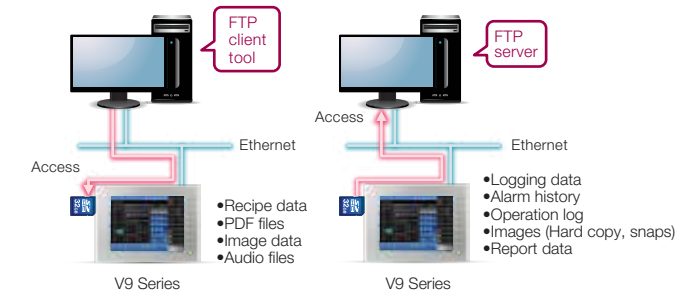


The FTP client tool allows data from inserted media to be read or written from/to a PC.

PDF Viewer

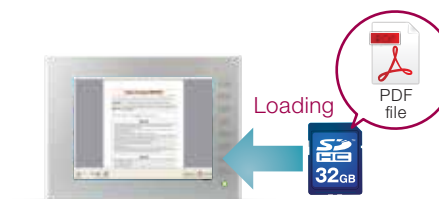


Fast navigation of instruction manuals and other important documents.

Configurable Screen Format Scheduler

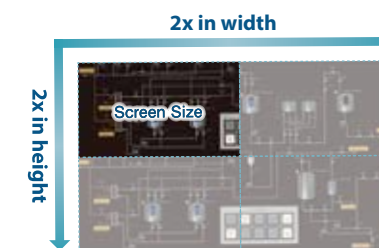


Large images can be navigated by scrolling without switching screens.

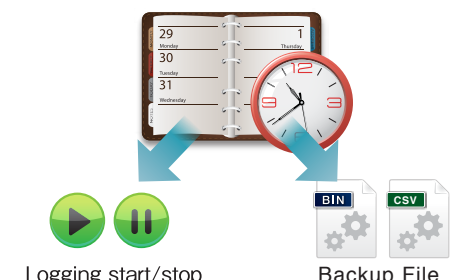

VPN Cloud Database Service

Centralized control of multiple locations is now possible with the use of our VPN Cloud Data Service, which connects V9 HMIs with a VPN and a cloud server. Operation data from several sites can be collected in the cloud server and monitored from your PC by simply accessing the cloud server.

TELLUS and V-Server

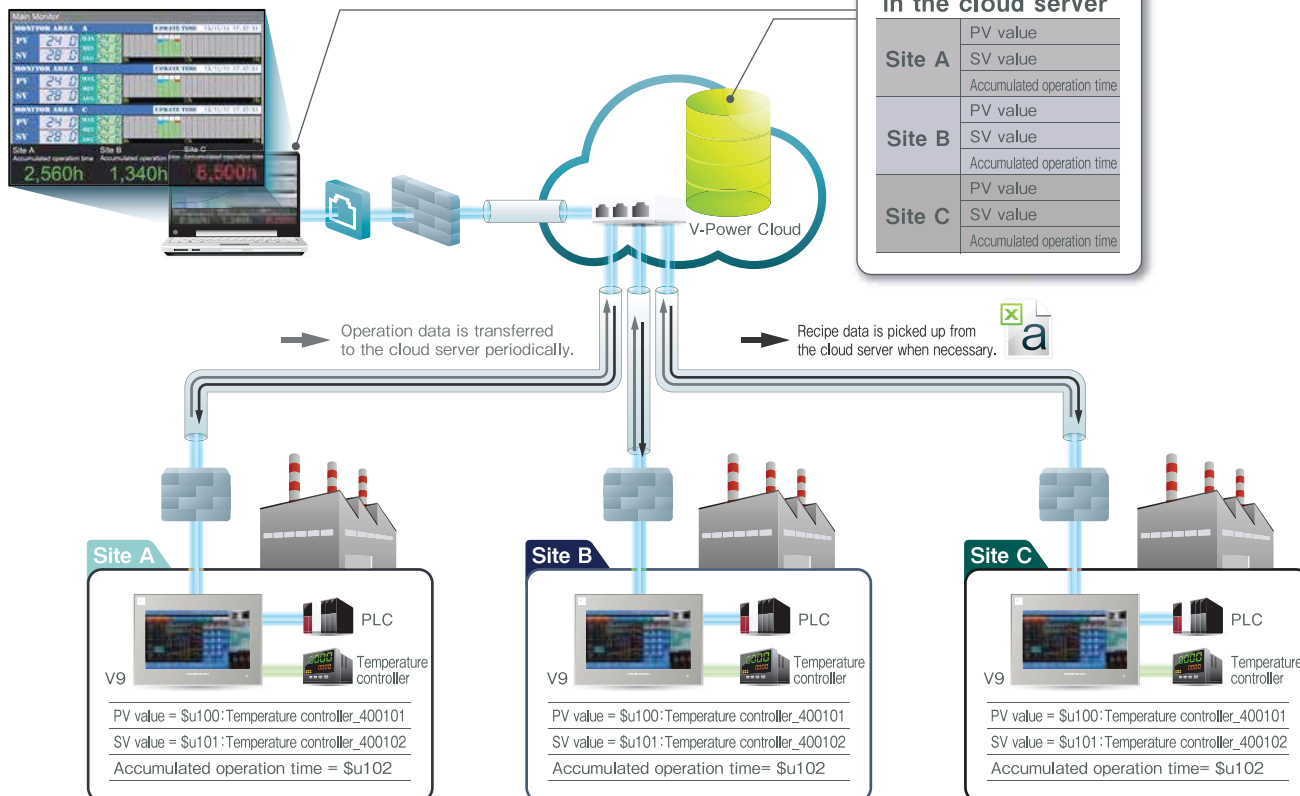

Specifications

	V9 Series			TECHNOSHOT	
	Advanced	Standard	Lite	TS1000	TS2000
Display Device	TFT Color LCD			TFT Color LCD	
Colors	16.7M Colors			65,536 Colors	
Backlight	LED				
Power Supply	DC24V	DC24V / AC100-240V		DC24V	
FROM	64MB			10.5MB	
SRAM	800KB			128KB	512KB
Serial Ports	3CH				
Ethernet Ports	2CH	Up to 2CH	1CH	1CH	
Wireless LAN	1CH	-	-	-	-
Audio Output	1CH	1CH	-	-	-
USB (Type A)	1 Port	1 Port	1 Port	1 Port	
USB (Type mini-B)	1 Port	1 Port	1 Port	1 Port	
SD Card Slot	1 Port	1 Port	1 Port	-	1 Port
UL, cUL, CE, KC	√	√	√	√	√
Class1 Div.2	-	√	√	-	-
NK / ABS / DNV / LR	-	√	√	-	-
FCC (Radio act)	√	-	-	-	-
NEMA 4X (IP66)	√	√	√	-	-

Fuji Electric Corp. of America

Tel: (510) 403-7863

Email: x-fea-hmi-group@fujielectric.com

www.americas.fujielectric.com

Information in this catalog is subject to change without notice.



Fuji Electric
Innovating Energy Technology

FEA-HMI-BR-100