

General Automation

Sensing & Measurement Solutions

When looking for standard automation components, machine builders and manufacturers alike need them to be readily available at a competitive price. But as industry moves quickly and demands change, the time to buy can be short. When you need sensors for automation, you need them now. This collection of go-to products from our Global family ensures that you have quick access to innovative technology at a competitive price.

- **Sensing Technologies You Use**

From photoelectrics to inductives, capacitives to cylinder sensors.

- **Accessories You Need**


Every sensor needs a bracket, a cable, and 24VDC power.


- **Quality You Trust**

These automation components are reliable and backed by Balluff's strong warranty.

- **Availability You Rely On**

We are actively managing inventory of these products so you don't have to worry. Rely on our supply chain to reduce your risk and investment.

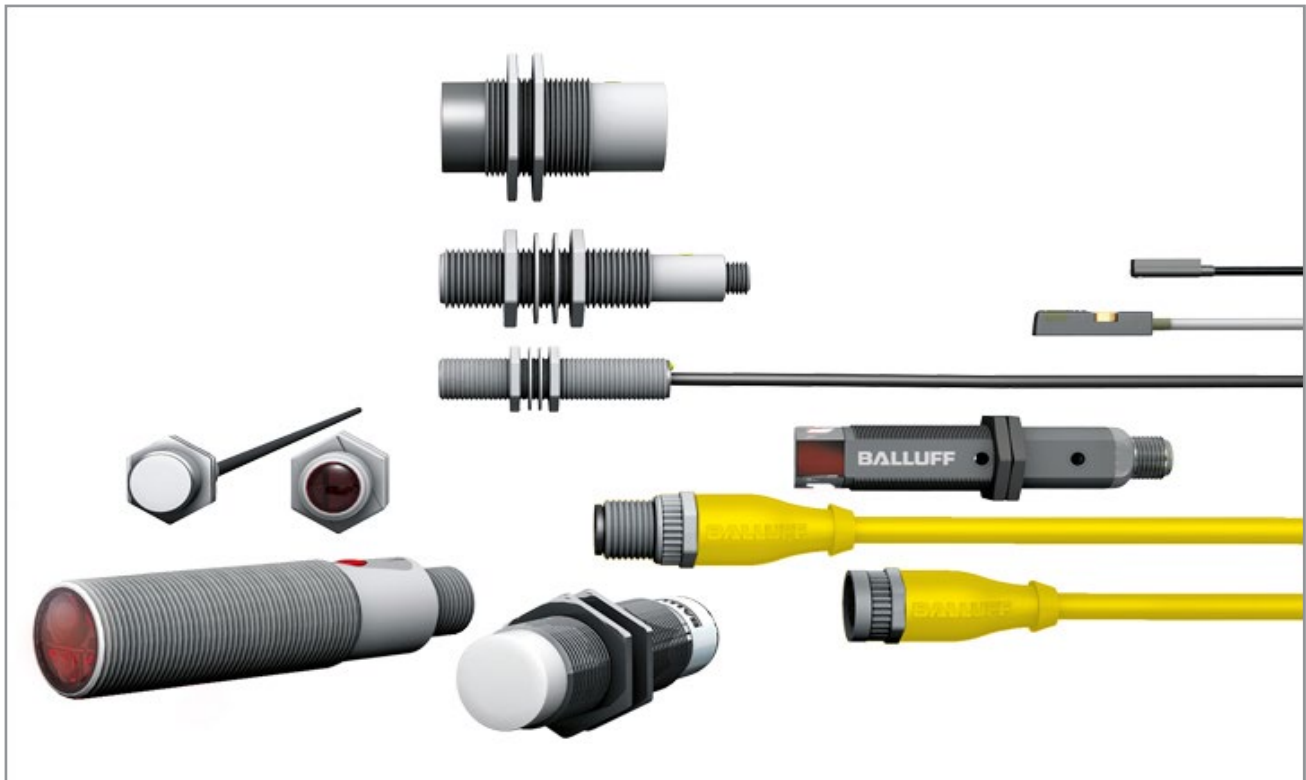

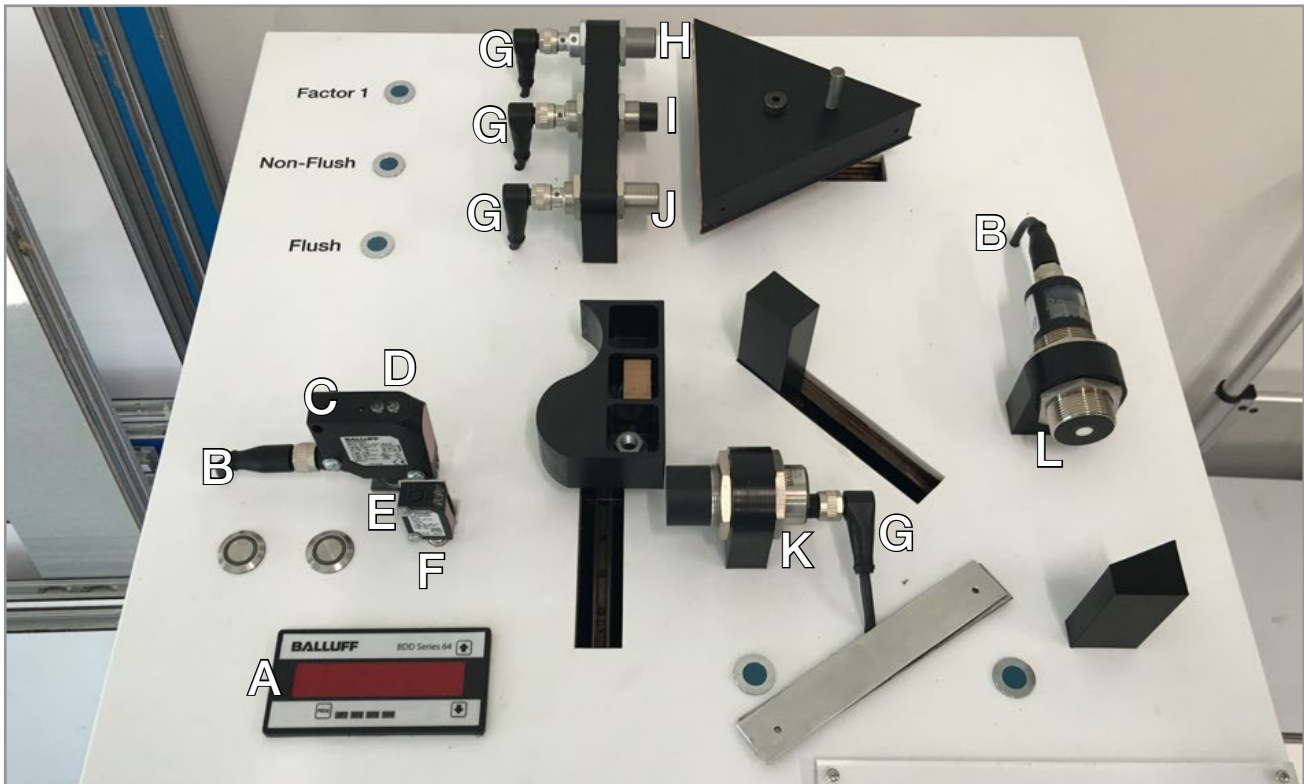

Letter	Order Code	Description
A	BAE004R	LED digital display, 5-digit, 0...10V/4...20mA input
B	BCC032F	Connector/cable, Female M12 straight, PUR, 2 m
C	BOD0002	BOS 26K, Photoelectric sensor, Class 2 laser light, Analog 0...10V, 45...85 mm operating range
D	BAM00TK	Mounting bracket for optical sensor, 19mm
E	BOD000H	BOS 6K, Photoelectric sensor, RED light, PNP, NO/NC, Analog 0...10V, 20...80mm adjustable operating range
F	BAM00U5	BOS 5K, mounting bracket for BOS 5K and 6K
G	BCC032Y	Connector/cable, Female M12 90° angle, PUR, 2m
H	BES03RM	Inductive sensor, Connector, PNP, NO, Sn= 5 mm, Flush (shielded), M12x1, Factor 1
I	BES008L	Inductive sensor, Connector, PNP, NO, Sn=16 mm, Non-flush, M12x1
J	BES02KK	Inductive sensor, Connector, PNP, NO, Sn= 8 mm, Flush (shielded), M12x1
K	BCS00MY	Capacitive sensor, Connector, PNP, NO, Sn= 25 m, Non-flush, PBT, 32.5 mm
L	BUS0022	Ultrasonic sensor, Connector, NO/NC, 30...250mm operating range, M30