


BAL SEAL® SEALS IN LOW-PRESSURE HYDRAULIC CYLINDERS

Low-pressure hydraulic cylinders are extensively used in industrial, agriculture, processing, and manufacturing equipment and other industrial machinery. Hydraulic cylinders must operate with minimal downtime in harsh environments and conditions; failure during production is costly.

Bal Seal® seals enhance performance and ensure sealing repeatability, which reduces production expenses by minimizing costly downtime.

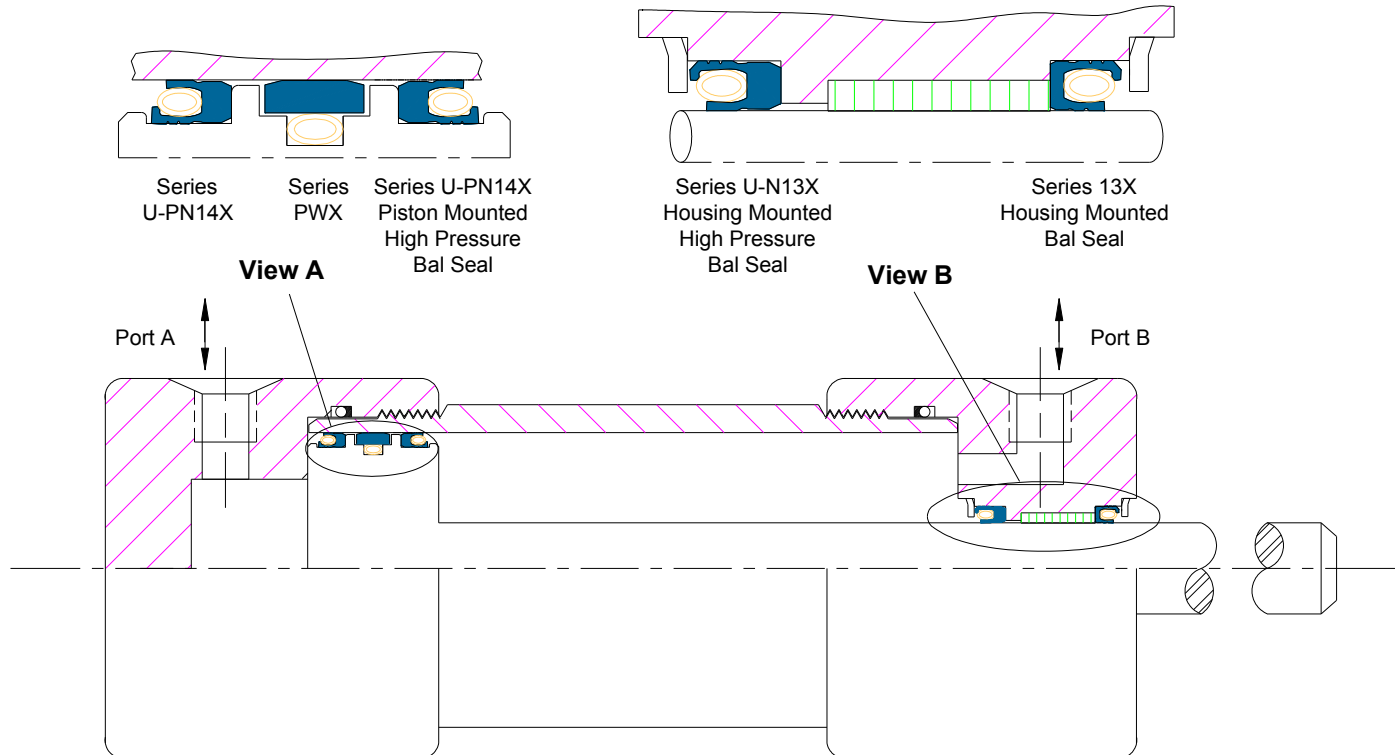

Operating Parameters

Sealing pressure:	3,000 psi (211 kg/cm ²)
Typical speed:	Slow
Temperature:	- 65°F to 250°F (- 54°C to 12 1°C)
Media:	Hydraulic oil, environment and dirt particles

Features:

- High-pressure, double-acting Bal Seal seals with patented, canted-coil spring energizer for long seal life.
- High-pressure back-up rings – designed for minimal seal extrusion and fabricated from non-scratching, low-friction materials.
- Bal Seal spring-energized guide rings hold the piston concentric for reduced seal wear and reduced cylinder bore scratching.
- Patented, canted-coil environmental seals provide maximum external sealing, minimal friction and long life.

For more information and technical assistance, consult the Technical Sales Department.

PATENTS: The items described in this page include products that are the subject of issued United States and foreign patents or products where patents are pending, including the following: Patents 6,641,141 B2; 7,210,398 B2; 6,161,838; 5,992,856; 5,134,244
U.S. Address 19650 Pauling Foothill Ranch, CA 92610-2610 • Phone: (949) 460-2100 • Fax: (949) 460-2300

BV Address: Jollemanhof 16, • 1019 GW Amsterdam • The Netherlands • Phone: 31 20 638 65 23 • Fax: 31 20 625 60 18