



The Infinite Bandwidth Company™

MIC915

Dual 135MHz Low-Power Op Amp

General Description

The MIC915 is a high-speed, unity-gain stable operational amplifier. It provides a gain-bandwidth product of 135MHz with a very low, 2.4mA supply current per op amp.

Supply voltage range is from ±2.5V to ±9V, allowing the MIC915 to be used in low-voltage circuits or applications requiring large dynamic range.

The MIC915 is stable driving any capacitive load and achieves excellent PSRR, making it much easier to use than most conventional high-speed devices. Low supply voltage, low power consumption, and small packing make the MIC915 ideal for portable equipment. The ability to drive capacitive loads also makes it possible to drive long coaxial cables.

Features

- 135MHz gain bandwidth product
- 2.4mA supply current per op amp
- MSOP-10 package
- 270V/μs slew rate
- drives any capacitive load


Applications

- Video
- Imaging
- Ultrasound
- Portable equipment
- Line drivers

Ordering Information

| Part Number | Junction Temp. Range | Package |
|-------------|----------------------|---------|
| MIC915BMM | -40°C to +85°C | MSOP-10 |

Pin Configuration

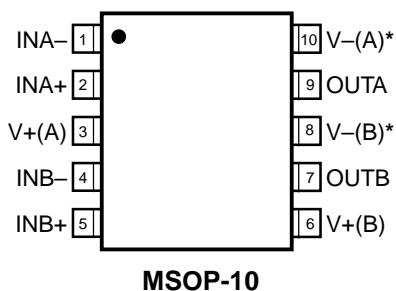

Pin Description

| Pin Number | Pin Name | Pin Function |
|------------|----------|-----------------------------------|
| 1 | INA- | Inverting Input A |
| 2 | INA+ | Noninverting Input A |
| 3 | V+(A) | Positive Supply Input (Op Amp A) |
| 4 | INB- | Inverting Input B |
| 5 | INB+ | Noninverting Input B |
| 6 | V+(B) | Positive Supply Input (Op Amp B) |
| 7 | OUTB | Output B |
| 8 | V-(B) | Negative Supply Input* (Op Amp B) |
| 9 | OUTA | Output A |
| 10 | V-(A) | Negative Supply Input* (Op Amp A) |

* V- pins must be externally shorted together

Absolute Maximum Ratings (Note 1)

| | |
|--|----------------------|
| Supply Voltage ($V_{V+} - V_{V-}$) | 20V |
| Differential Input Voltage ($ V_{IN+} - V_{IN-} $) | 8V, Note 4 |
| Input Common-Mode Range (V_{IN+}, V_{IN-}) | V_{V+} to V_{V-} |
| Lead Temperature (soldering, 5 sec.) | 260°C |
| Storage Temperature (T_S) | 150°C |
| ESD Rating, Note 3 | 1.5kV |

Operating Ratings (Note 2)

| | |
|--------------------------------|--------------------------------|
| Supply Voltage (V_S) | $\pm 2.5V$ to $\pm 9V$ |
| Junction Temperature (T_J) | $-40^\circ C$ to $+85^\circ C$ |
| Package Thermal Resistance | 260°C/W |

Electrical Characteristics ($\pm 5V$)

$V_{V+} = +5V$, $V_{V-} = -5V$, $V_{CM} = 0V$, $V_{OUT} = 0V$; $R_L = 10M\Omega$; $T_J = 25^\circ C$, **bold** values indicate $-40^\circ C \leq T_J \leq +85^\circ C$; unless noted.

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|-----------|--|--|----------------------|------|----------------------|--------------------|
| V_{OS} | Input Offset Voltage | | | 1 | 15 | mV |
| V_{OS} | Input Offset Voltage Temperature Coefficient | | | 4 | | $\mu V/^\circ C$ |
| I_B | Input Bias Current | | | 3.5 | 5.5 9 | μA μA |
| I_{OS} | Input Offset Current | | | 0.05 | 3 | μA |
| V_{CM} | Input Common-Mode Range | CMRR > 60dB | -3.25 | | +3.25 | V |
| CMRR | Common-Mode Rejection Ratio | $-2.5V < V_{CM} < +2.5V$ | 70 60 | 90 | | dB dB |
| PSRR | Power Supply Rejection Ratio | $\pm 5V < V_S < \pm 9V$ | 74 70 | 81 | | dB dB |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 2k\Omega$, $V_{OUT} = \pm 2V$ | 60 | 71 | | dB |
| | | $R_L = 200\Omega$, $V_{OUT} = \pm 2V$ | 60 | 71 | | dB |
| V_{OUT} | Maximum Output Voltage Swing | positive, $R_L = 2k\Omega$ | +3.3 +3.0 | 3.5 | | V V |
| | | negative, $R_L = 2k\Omega$ | | -3.5 | -3.3 -3.0 | V V |
| | | positive, $R_L = 200\Omega$ | +3.0 +2.75 | 3.2 | | V V |
| | | negative, $R_L = 200\Omega$ | | -2.8 | -2.45 -2.2 | V V |
| GBW | Gain-Bandwidth Product | $R_L = 1k\Omega$ | | 125 | | MHz |
| BW | -3dB Bandwidth | $A_V = 1$, $R_L = 100\Omega$ | | 192 | | MHz |
| SR | Slew Rate | | | 230 | | V/ μs |
| | Crosstalk | f=1MHz | | 82 | | dB |
| I_{GND} | Short-Circuit Output Current | source | | 72 | | mA |
| | | sink | | 25 | | mA |
| I_Q | Supply Current per Op Amp | | | 2.4 | 3.5 4.1 | mA mA |

Electrical Characteristics


$V_{V+} = +9V$, $V_{V-} = -9V$, $V_{CM} = 0V$, $V_{OUT} = 0V$; $R_L = 10M\Omega$; $T_J = 25^\circ C$, **bold** values indicate $-40^\circ C \leq T_J \leq +85^\circ C$; unless noted.

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|----------|--|-----------|-----|-----|-----------------|--------------------|
| V_{OS} | Input Offset Voltage | | | 1 | 15 | mV |
| V_{OS} | Input Offset Voltage Temperature Coefficient | | | 4 | | $\mu V/^\circ C$ |
| I_B | Input Bias Current | | | 3.5 | 5.5 9 | μA μA |

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|-----------|------------------------------|------------------------------------|---------------------|------|---------------------|------------|
| I_{OS} | Input Offset Current | | | 0.05 | 3 | μA |
| V_{CM} | Input Common-Mode Range | CMRR > 60dB | -7.25 | | +7.25 | V |
| CMRR | Common-Mode Rejection Ratio | $-6.5V < V_{CM} < 6.5V$ | 70 60 | 98 | | dB dB |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 2k\Omega, V_{OUT} = \pm 6V$ | 60 | 73 | | dB |
| V_{OUT} | Maximum Output Voltage Swing | positive, $R_L = 2k\Omega$ | +7.2 +6.8 | +7.4 | | V V |
| | | negative, $R_L = 2k\Omega$ | | -7.4 | -7.2 -6.8 | V V |
| GBW | Gain-Bandwidth Product | $R_L = 1k\Omega$ | | 135 | | MHz |
| SR | Slew Rate | | | 270 | | V/ μs |
| | Crosstalk | $f = \text{MHz}$ | | 82 | | dB |
| I_{GND} | Short-Circuit Output Current | source | | 90 | | mA |
| | | sink | | 32 | | mA |
| I_{GND} | Supply Current per Op Amp | | | 2.5 | 3.7 4.3 | mA mA |


- Note 1.** Exceeding the absolute maximum rating may damage the device.
- Note 2.** The device is not guaranteed to function outside its operating rating.
- Note 3.** Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.
- Note 4.** Exceeding the maximum differential input voltage will damage the input stage and degrade performance (in particular, input bias current is likely to increase).

Test Circuits

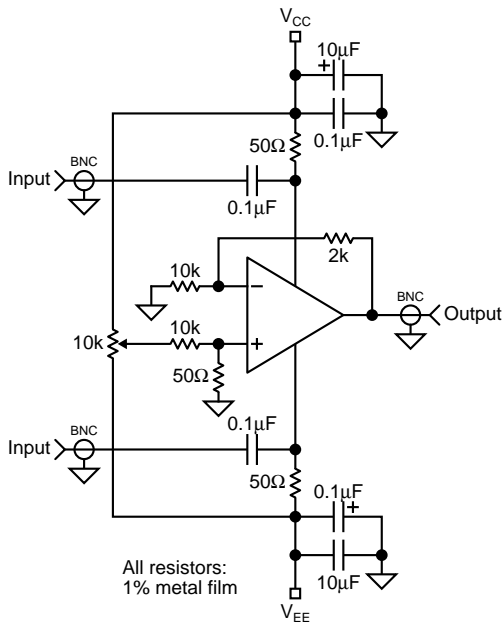

PSRR vs. Frequency


All resistors:
1% metal film

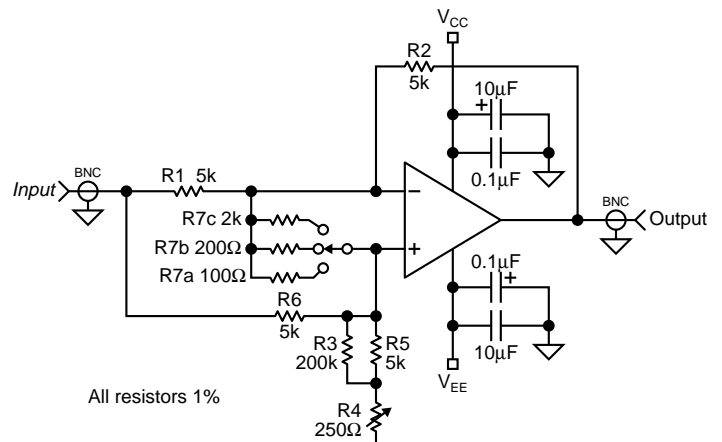













All resistors 1%













$$V_{OUT} = V_{ERROR} \left(1 + \frac{R2}{R1} + \frac{R2 + R5 + R4}{R7} \right)$$












CMRR vs. Frequency

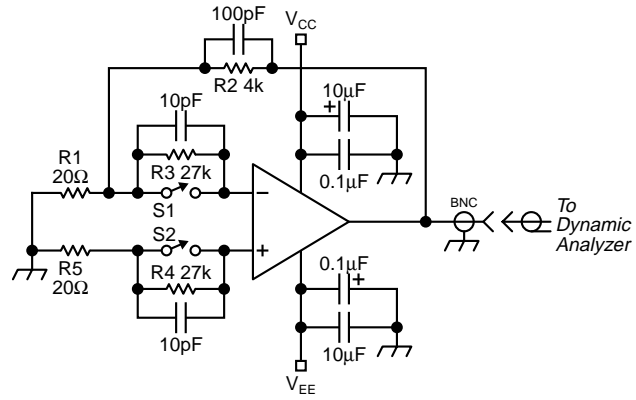**Noise Measurement**


Electrical Characteristics

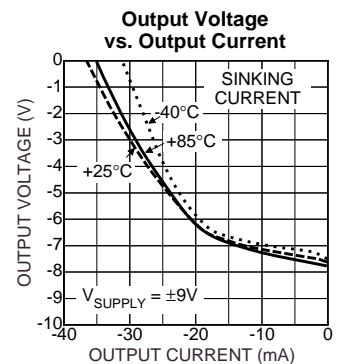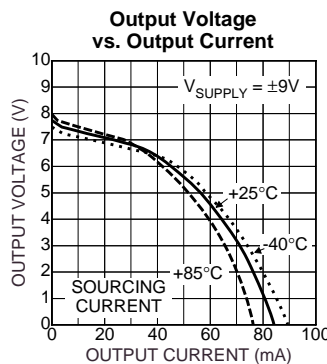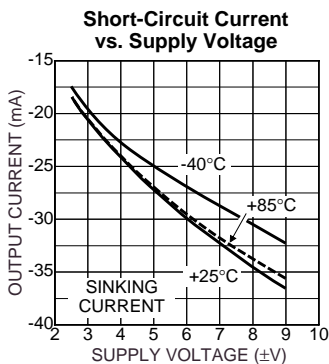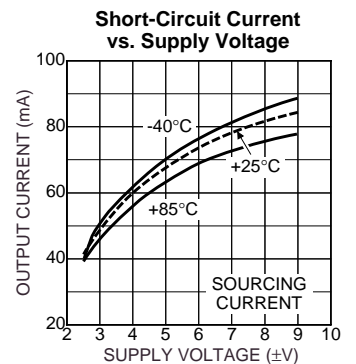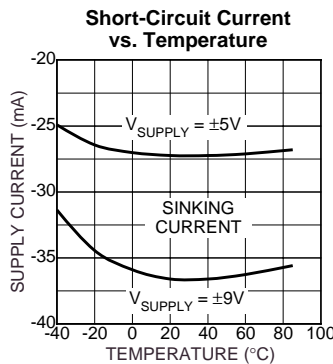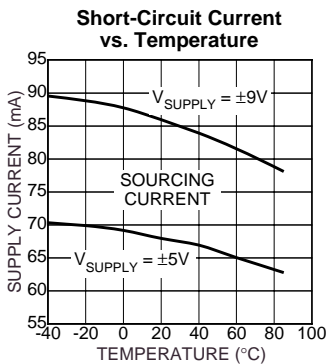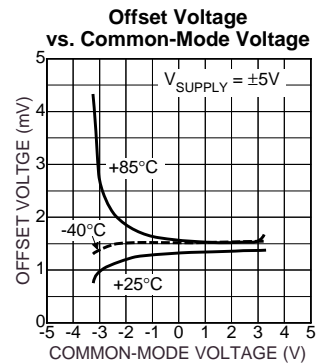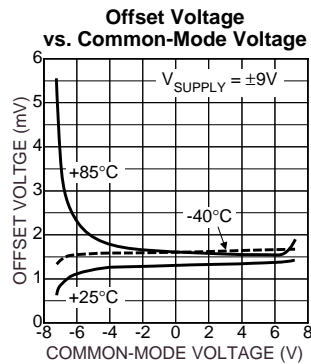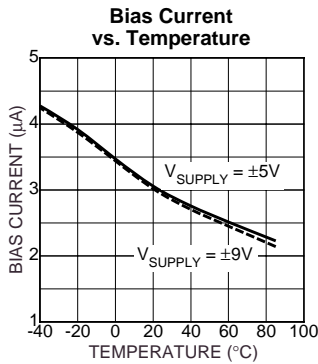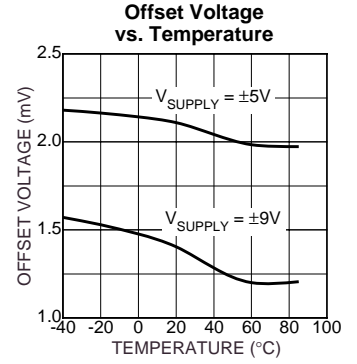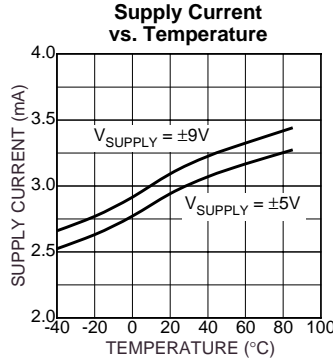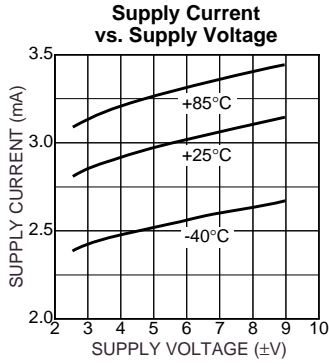

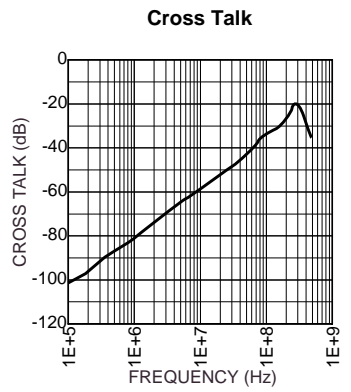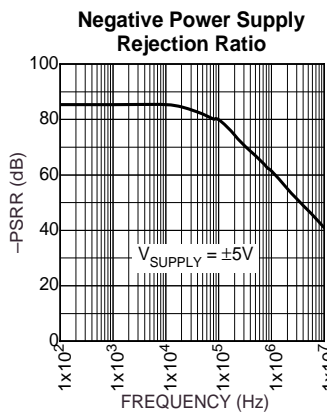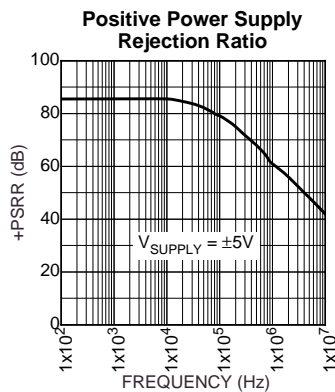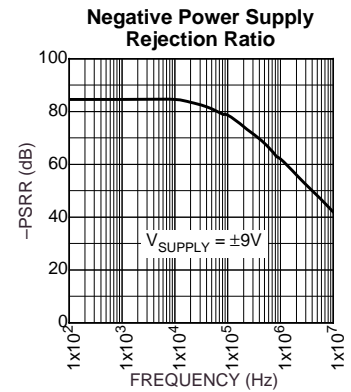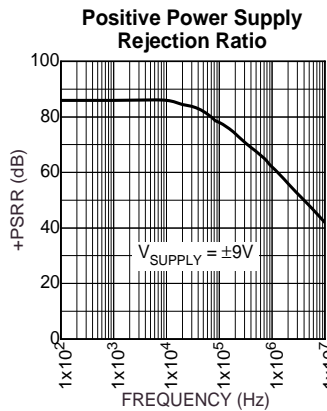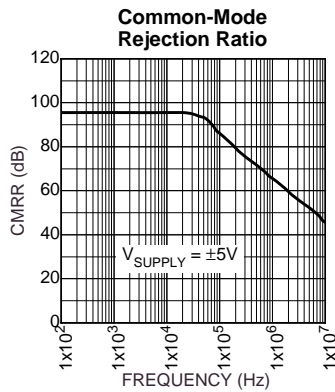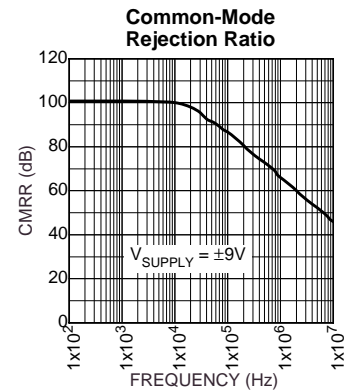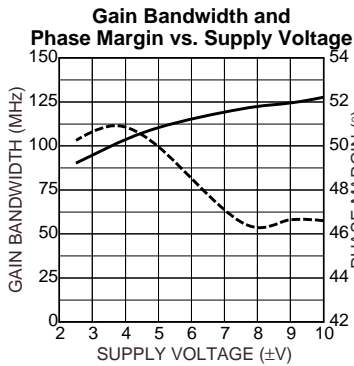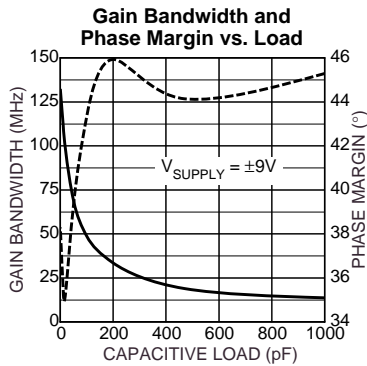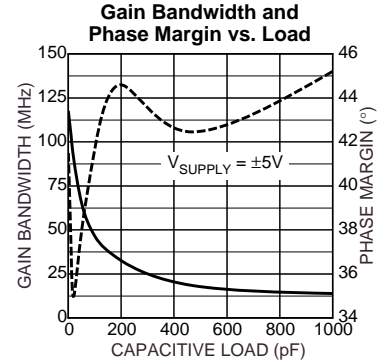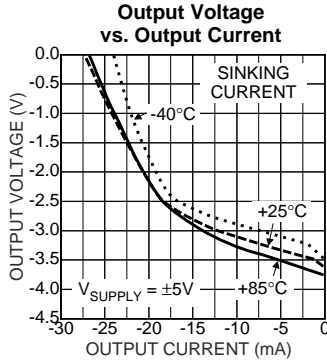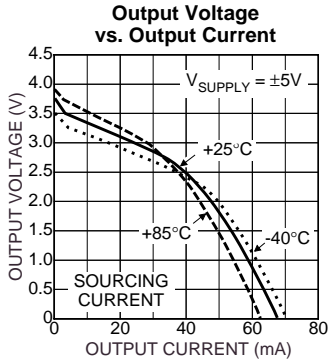


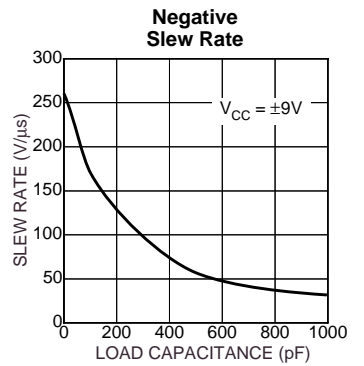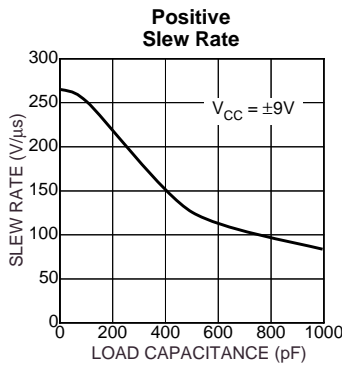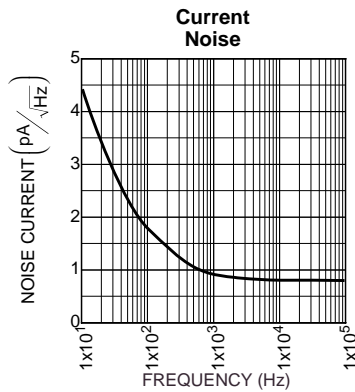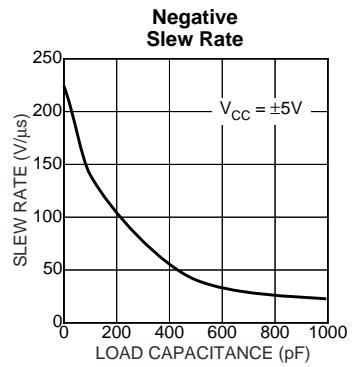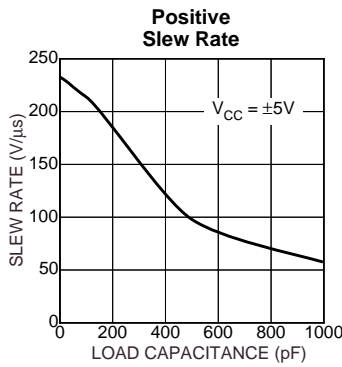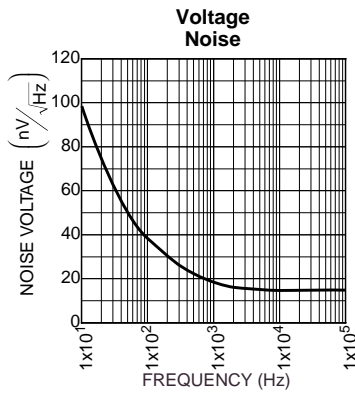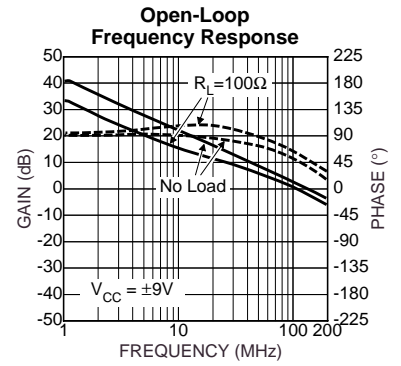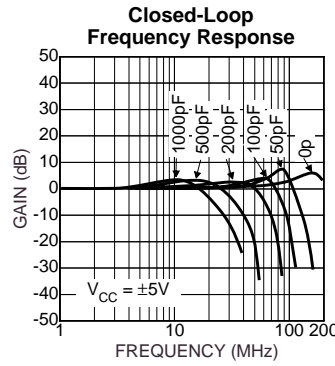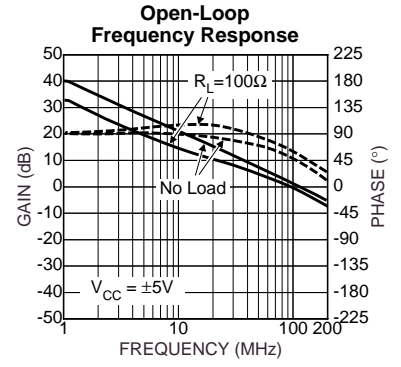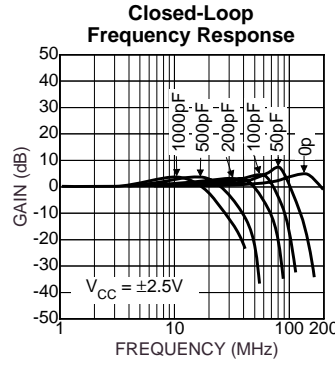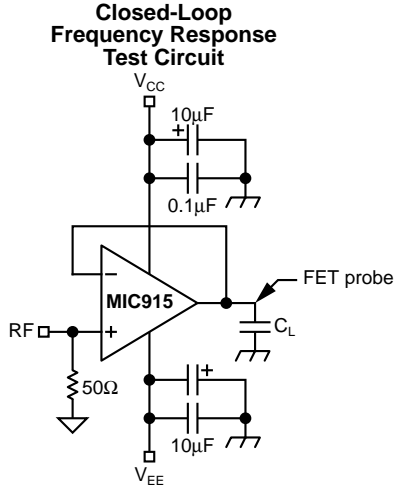


Small-Signal
Pulse Response

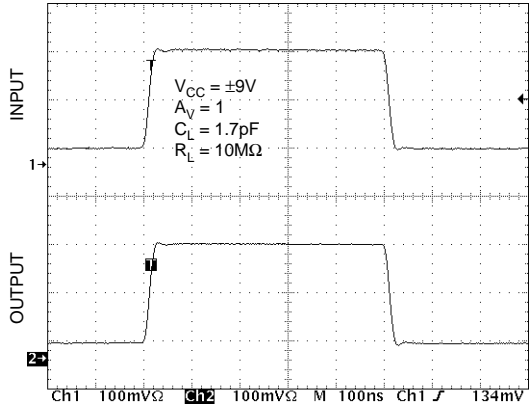


Small-Signal
Pulse Response

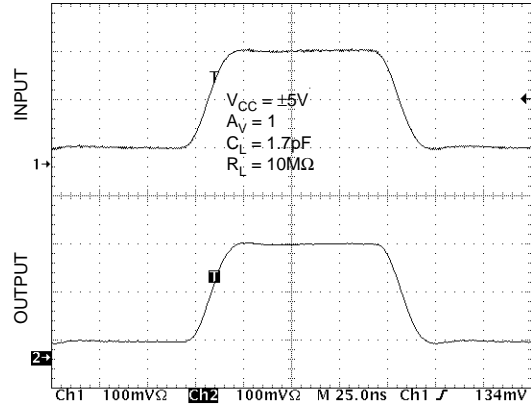


Small-Signal
Pulse Response

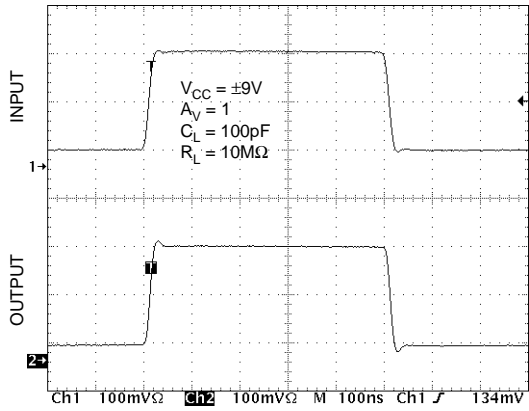


Small-Signal
Pulse Response

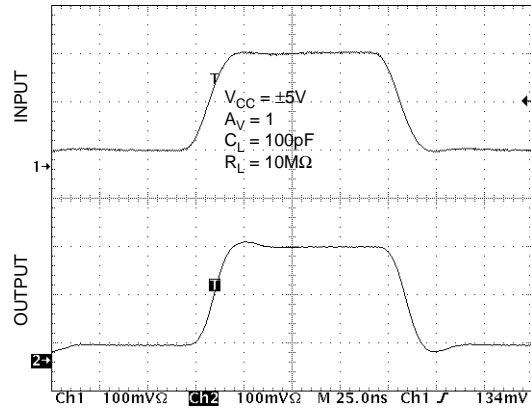


Small-Signal
Pulse Response

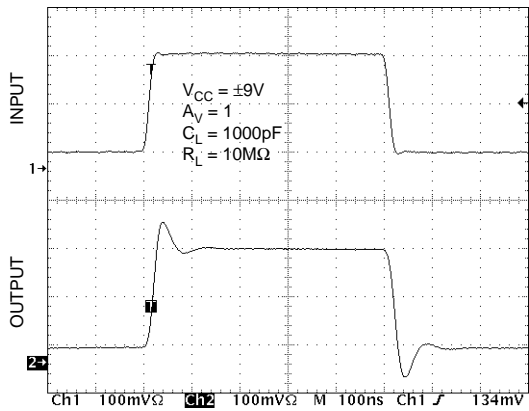


Small-Signal
Pulse Response

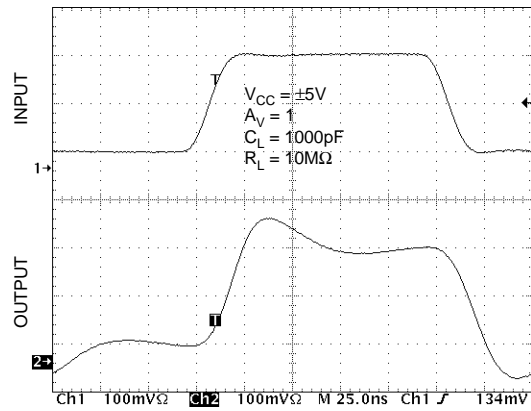


Large-Signal
Pulse Response

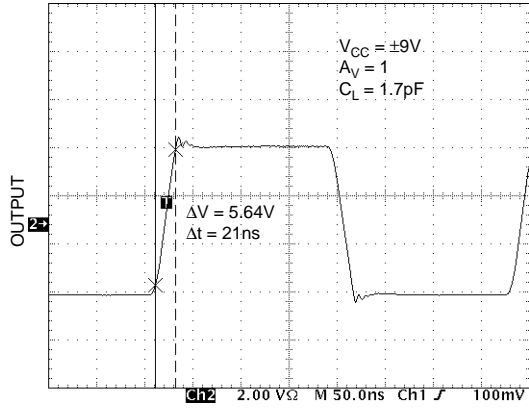


Large-Signal
Pulse Response

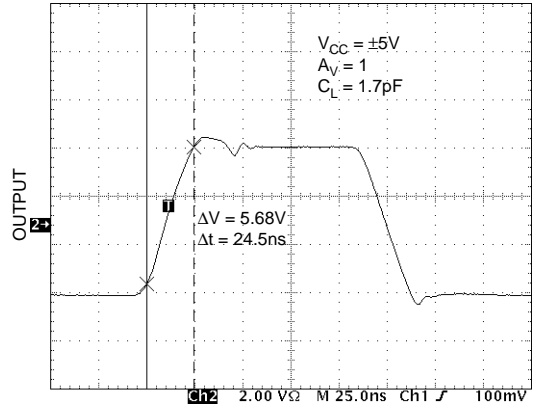


Large-Signal
Pulse Response

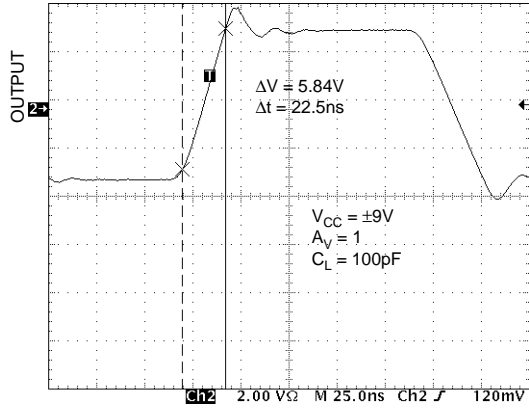


Large-Signal
Pulse Response

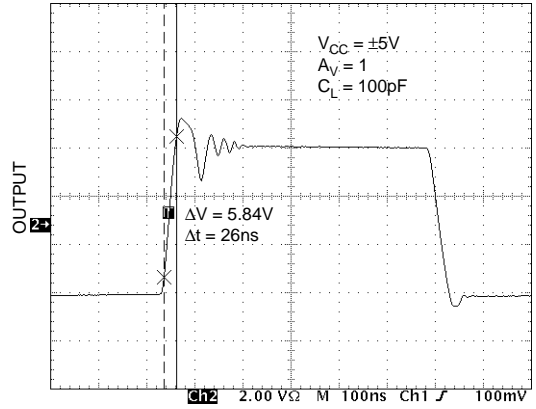

Large-Signal
Pulse Response

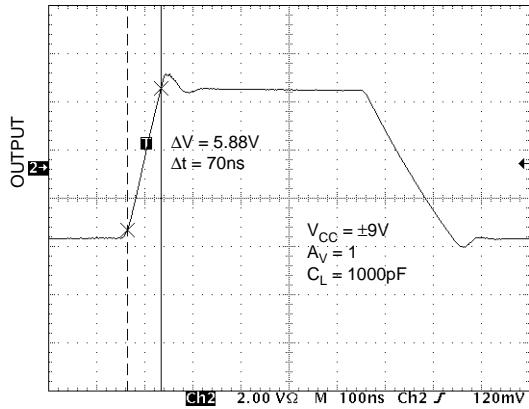

Large-Signal
Pulse Response

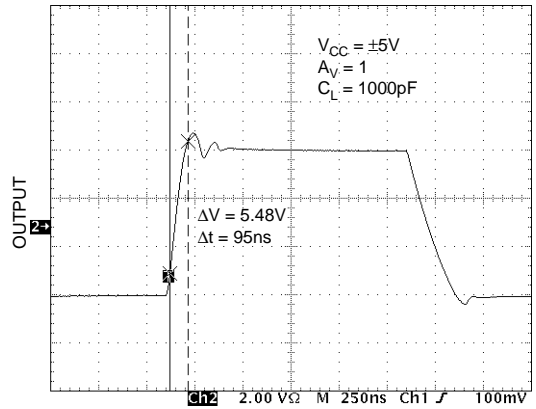

Applications Information

The MIC915 is a high-speed, voltage-feedback operational amplifier featuring very low supply current and excellent stability. This device is unity gain stable and capable of driving high capacitance loads.

Driving High Capacitance

The MIC915 is stable when driving any capacitance (see "Typical Characteristics: Gain Bandwidth and Phase Margin vs. Load Capacitance") making it ideal for driving long coaxial cables or other high-capacitance loads.

Phase margin remains constant as load capacitance is increased. Most high-speed op amps are only able to drive limited capacitance.

Note: increasing load capacitance does reduce the speed of the device (see "Typical Characteristics: Gain Bandwidth and Phase Margin vs. Load"). In applications where the load capacitance reduces the speed of the op amp to an unacceptable level, the effect of the load capacitance can be reduced by adding a small resistor (<100Ω) in series with the output.

Feedback Resistor Selection

Conventional op amp gain configurations and resistor selection apply, the MIC915 is NOT a current feedback device. Resistor values in the range of 1k to 10k are recommended.

Layout Considerations

All high speed devices require careful PCB layout. The high stability and high PSRR of the MIC915 make this op amp easier to use than most, but the following guidelines should be observed: Capacitance, particularly on the two inputs pins will degrade performance; avoid large copper traces to the inputs. Keep the output signal away from the inputs and use a ground plane.

It is important to ensure adequate supply bypassing capacitors are located close to the device.

Power Supply Consideration

Regular supply bypassing techniques are recommended. A 10μF capacitor in parallel with a 0.1μF capacitor on both the positive and negative supplies are ideal. For best performance all bypassing capacitors should be located as close to the op amp as possible and all capacitors should be low ESL (equivalent series inductance), ESR (equivalent series resistance). Surface-mount ceramic capacitors are ideal. **Both V- pins must be externally shorted together.**

Thermal Considerations

It is important to ensure the IC does not exceed the maximum operating junction (die) temperature of 85°C. The part can be operated up to the absolute maximum temperature rating of 125°C, but between 85°C and 125°C performance will degrade, in particular CMRR will reduce.

A MIC915 with no load, dissipates power equal to the quiescent supply current * supply voltage

$$P_{D(no\ load)} = (V_{V+} - V_{V-}) I_S$$

When a load is added, the additional power is dissipated in the output stage of the op amp. The power dissipated in the device is a function of supply voltage, output voltage and output current.


$$P_{D(output\ stage)} = (V_{V+} - V_{OUT}) I_{OUT}$$

$$Total\ Power\ Dissipation = P_{D(no\ load)} + P_{D(output\ stage)}$$

Ensure the total power dissipated in the device is no greater than the thermal capacity of the package. The MSOP-10 package has a thermal resistance of TBD°C/W.

$$Max.\ Allowable\ Power\ Dissipation = \frac{T_{J(max)} - T_{A(max)}}{TBD} W$$

Package Information

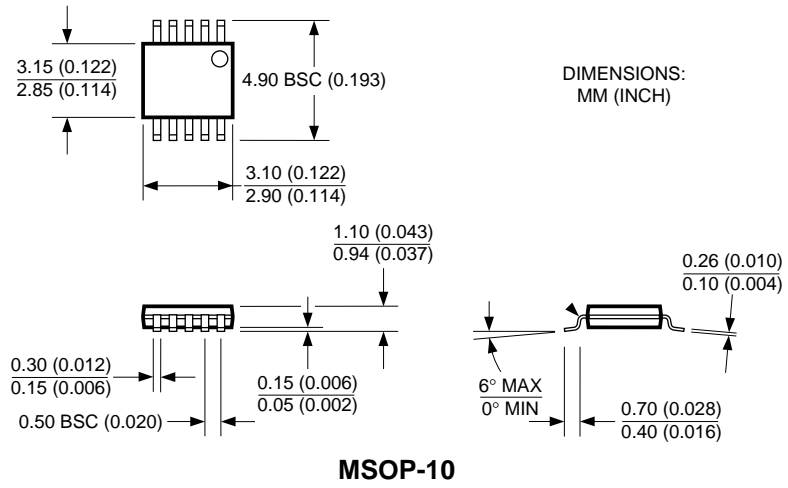

MICREL INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 944-0970 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated