


## Aluminum Nitride 15 dB FLANGED ATTENUATOR

### Features:


- ◆ Aluminum Nitride Material
- ◆ DC - 4 GHz Performance
- ◆ 75 Watt Input Power
- ◆ Flange Mount

### General Description:


The AA1500-75-1X is a flanged 15 dB, Aluminum Nitride attenuator. It has an input power rating of 75 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 4 GHz.

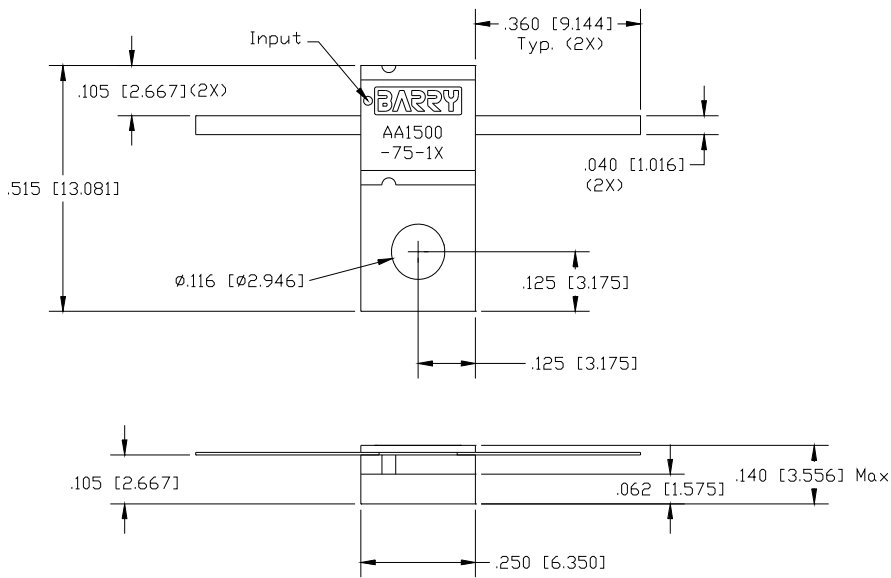

Dimensions in inches [mm]  
Tolerance ± .010 [.254]  
unless otherwise stated

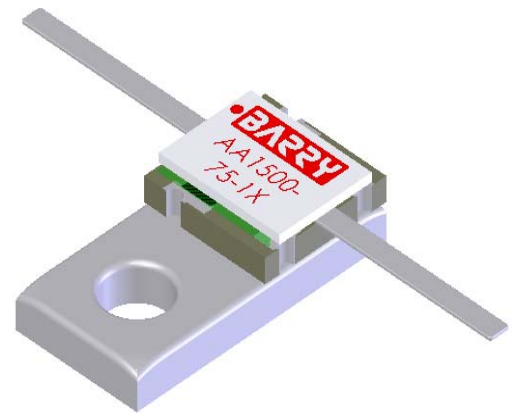

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		4	GHz
Input Return Loss	17			dB
Output Return Loss	20			dB
Input Power			75	Watts
Attenuation	14	15	16	dB
Flange Temperature			100	°C

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com  
Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
06/15/09	06/15/09	-