



WWW.BARRYIND.COM

D08Z-50R0J99-00C36-X



BeO



LEADED TERMINATION

Features:

- ◆ BeO Material
- ◆ DC - 4 GHz Performance
- ◆ 250 Watt Input Power
- ◆ Solder Mountable


General Description:

The D08Z-50R0J99-00C36-X is a leaded 50 ohm, BeO termination. It has an input power of 250 watts max, while maintaining a constant mounting surface temperature of 100°C. It offers a frequency range from DC to 4 GHz.

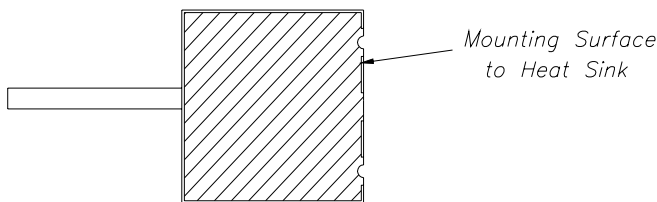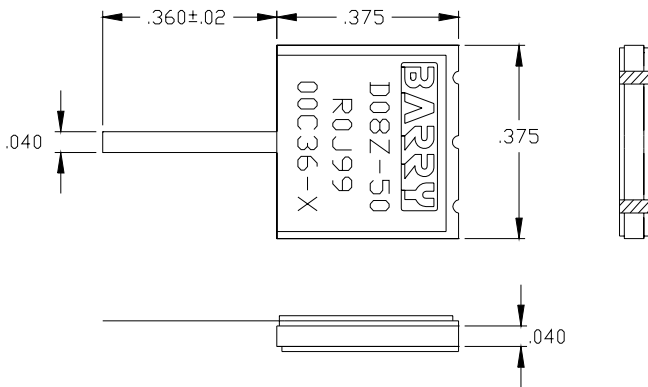

Dimensions in inches
Tolerance ± .010
unless otherwise stated

DERATING CURVE:

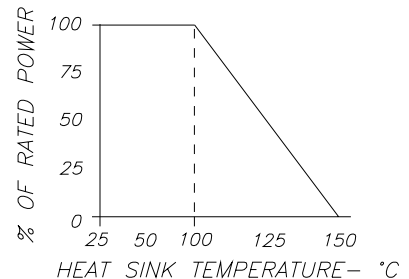

Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		4	GHz
Input Return Loss	16			dB
Resistance	47.5	50.0	52.5	Ohms
Input Power			250	Watts
Mounting Surface Temperature			100	°C

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
02/19/08	02/19/08	-