


CGR18650E: Cylindrical Model

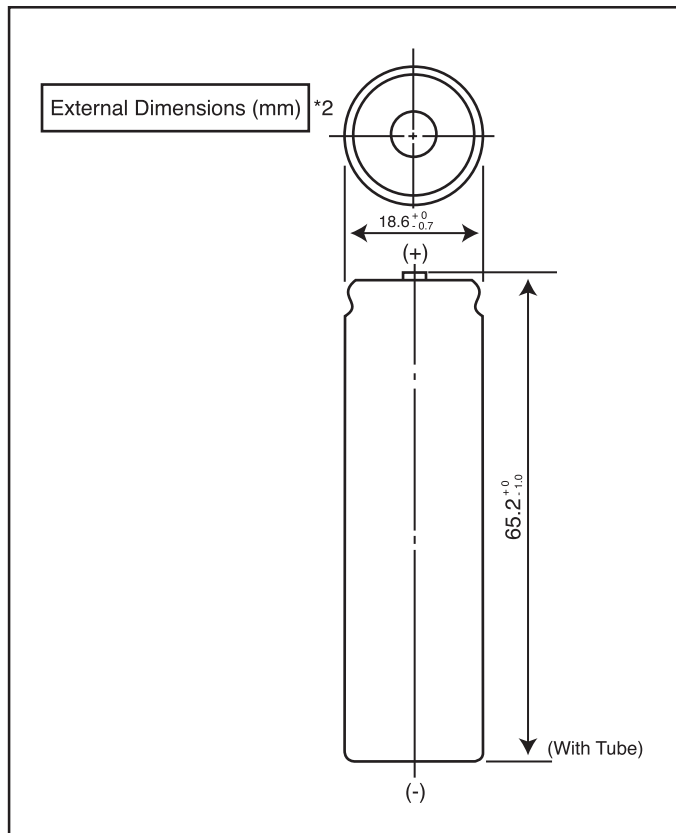

To ensure safety, the referenced Li-ion cell is not sold as a bare cell. Li-ion cells must be integrated with the appropriate safety circuitry via an authorized Panasonic Li-ion pack assembler.



Specifications

<b>Nominal Voltage</b>		3.7 V
<b>Standard Capacity<sup>*1</sup></b>		2550mAh
<b>Dimensions<sup>*2</sup></b>	<b>Diameter</b>	18.6 + 0/-0.7mm
	<b>Height</b>	65.2 + 0/-1.0mm
	<b>Weight</b>	Approx. 46.5g


\*1 After a fresh battery has been charged at constant voltage/constant current (4.2 V, 1715mA (max), 50mA cut-off, 25°C), the average of the capacity (ending voltage of 3 V at 25°C) that is discharged at a standard current (490mA).

\*2 Dimensions of a fresh battery

Discharge Characteristics

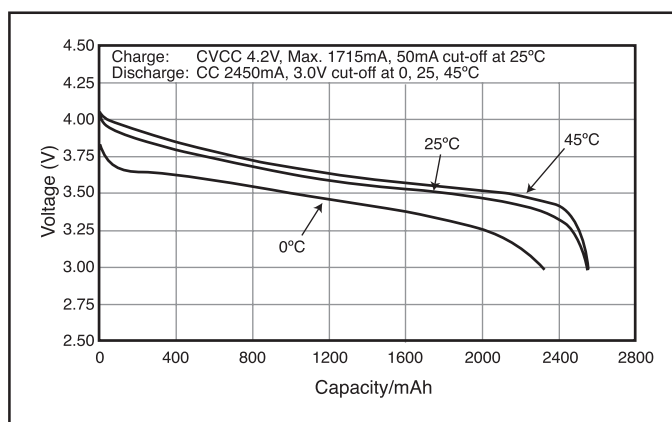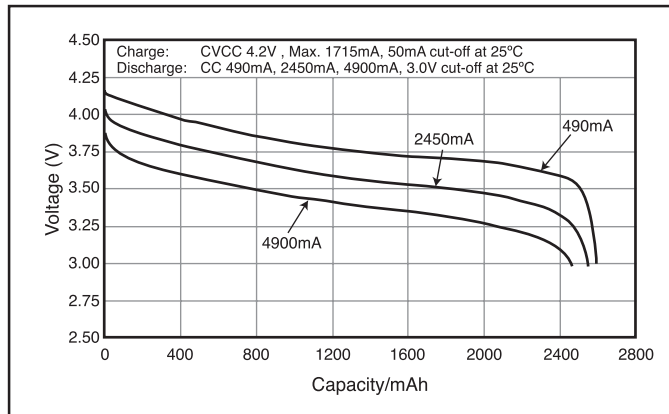

Charge Characteristics

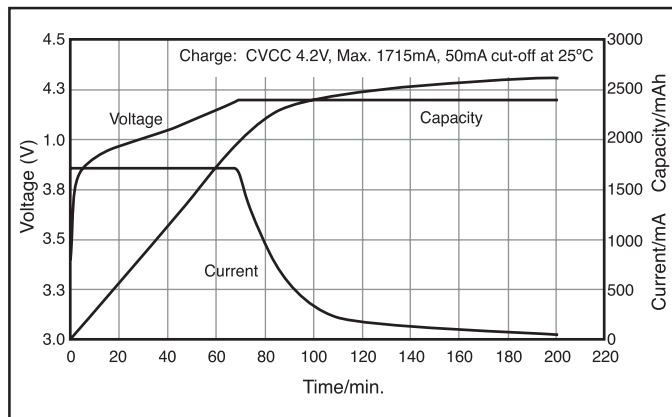

THIS PRODUCT IS AVAILABLE FROM  
[WWW.BATTERYSPECIALTIES.COM](http://WWW.BATTERYSPECIALTIES.COM)  
 800-854-5759, 800-352-3706 in CA

