


# BI260-170QD

Intel Q170 Compact Industrial Barebone Computer

## Features

- High Reliability Gold Plating Connectors
- Supports 3 Independent Displays
- 2 x DisplayPort, 1 x HDMI
- Rear USB: 4 x USB 3.0 and 2 x USB 2.0
- Front USB: 2 x USB 3.0 OR 2 x USB 2.0
- Rich Storage Interfaces: 1 x M.2, 1 x mSATA, and 1 x 2.5" HDD Drive Bay
- 19V DC Input
- Dimensions: 8.6" x 8" x 3"

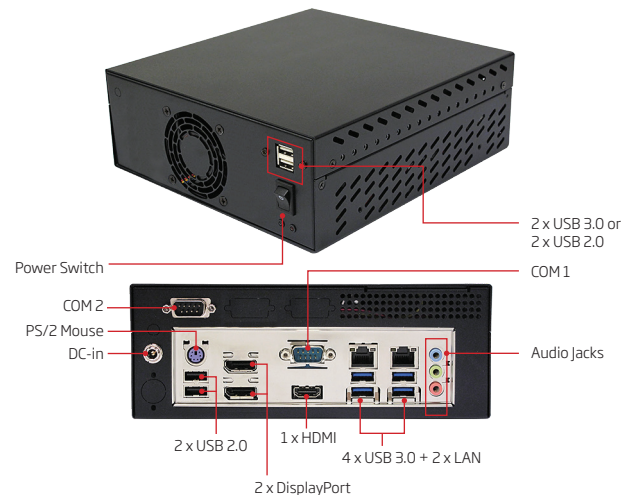

## Specifications

### System

<b>CPU</b>	Socket LGA1151 supports 14nm Intel Core i7/i5/i3 and Celeron processors
<b>System Chipset</b>	Intel Q170 PCH Express Chipset
<b>BIOS</b>	128Mb SPI BIOS
<b>System Memory</b>	2 x (Gold Plated) SODIMM slots support up to 32 GB Dual Channel DDR4 2133 MHz vertical type memory sockets
<b>Video</b>	Intel® Integrated Graphic Engine
<b>Audio Codec</b>	Realtek ALC892/887 HD Audio
<b>Ethernet</b>	LAN 1: Intel® i219-LM Gigabit LAN Controller LAN 2: Intel® i211-AT Gigabit LAN Controller
<b>Expansion</b>	1 x Full/Half Size mini-PCIe (mSATA III Support) (Gold Plated) 1 x M.2 Slot (Gold Plated) (Support 2280 and 2242)
<b>System Fan</b>	1 x 60mm
<b>System Indicator</b>	1 x Power LED, 1 x HDD LED, 1 x Momentary Switch
<b>Storage</b>	1 x 2.5" SSD/HDD Drive Bay

### External I/O

<b>KB/MS</b>	1 x PS/2 Mouse
<b>Audio</b>	Line-in, Line-out, Mic-in
<b>LAN</b>	2 x RJ-45
<b>Display Interface</b>	2 x DisplayPort Connectors (Gold Plated) 1 x HDMI Connector (Gold Plated)
<b>USB</b>	Rear: 4 x USB 3.0 and 2 x USB 2.0 Front: 2 x USB 3.0 OR 2 x USB 2.0
<b>COM (Serial Port)</b>	2 x COM
<b>Power Input</b>	1 x DC-in

### Mechanical & Environment

<b>Power Type</b>	12V, 16 - 24V DC
<b>Operating Temp.</b>	0 ~ 40°C (32 ~ 104°F)
<b>Storage Temperature</b>	-20 ~ 60°C (-4 ~ 140°F)
<b>Relative Humidity</b>	10% ~ 86% Relative Humidity, Non-condensing
<b>Exterior Color</b>	Black
<b>Dimensions</b>	8.6" L x 8" W x 3" H
<b>Weight</b>	4.25 lbs

\* All product specifications and images are subject to change without notice.  
Last update: 8/23/2016