


★ Return loss meets requirements of G.703

★ Fast rise time compatible with standards


★ Surface mount packages




Specifications				
Part Number	Application	Turn Ratio(2%) (1-3):(4-6)	OCL @ 100 KHz, 0.1 V (1-3)&(4-6)	Leakage Inductance(uH) @100KHz,0.1v,
TC0001	T3	1:1	40uH min	0.1uH max
TC0002	T3	1:2CT	19uH min	0.1uH max

Specifications continue			
Part Number	C _{ww} @10 KHz, 0.1 V (1+3)-(4+6)	Bandwidth 75Ω system	Isolation Voltage (Vrms)
TC0001	10pF max	0.2-340 MHz typ	1500
TC0002	10pF max	0.25-500 MHz typ	1500

Dimension

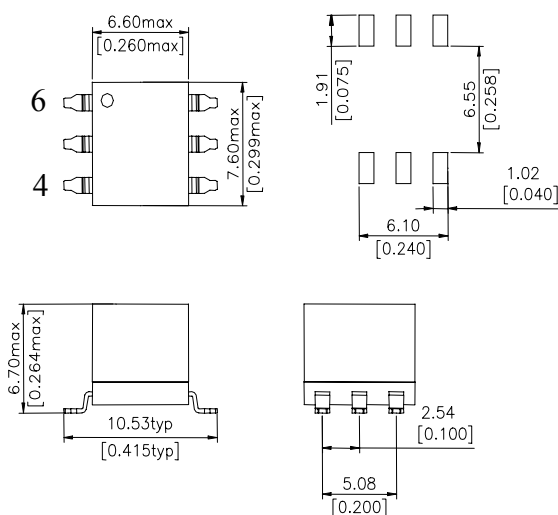

Schematic

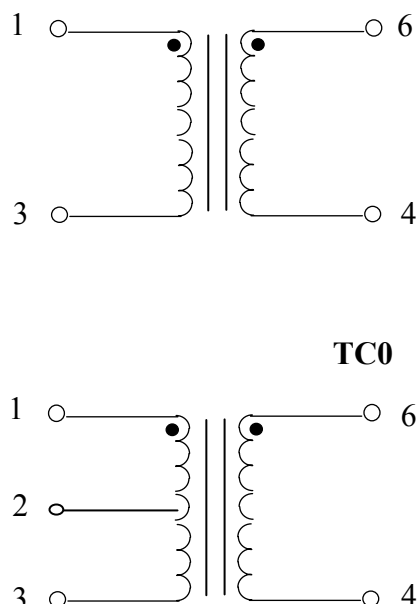

Data sheet subject to change without notice