


★ Designed to meet IR 235<sup>o</sup>C peak requirement

★ Excellent THD performance


★ Small EP13 Package in SMD and THT Type




Specifications				
Part Number	Application	Turn Ratio (2%) (1-5):(10-6)	OCL @ 10 KHz, 0.1 V (6-10), 7+9 shorted	Leakage Inductance (6-10), 7+9 shorted @ 100 KHz, 0.1 V
AT0057	ADSL	1:1.6	440uH(±5%)	15uH Max
AT5057	ADSL	1:1.6	440uH(±5%)	15uH Max

Specifications continue			
Part Number	DCR (1-5), 2-4 shorted	THD @ 100 KHz	Isolation Voltage (Vrms)
AT0057	2.8 ΩMax	80 dB MIN	1500
AT5057	2.8Ω Max	80 dB MIN	1500

### Dimension

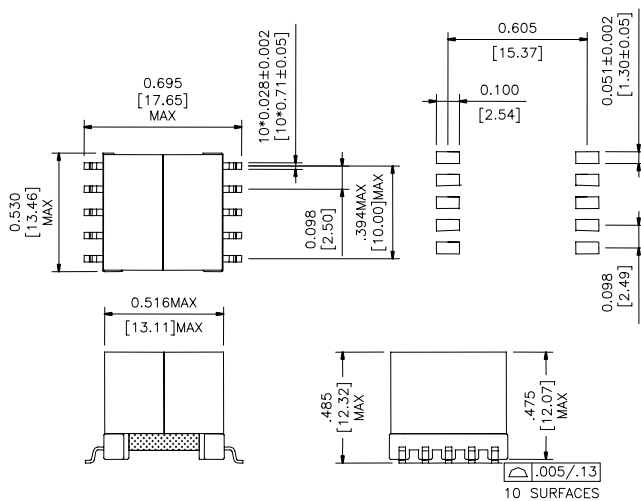


### Schematic

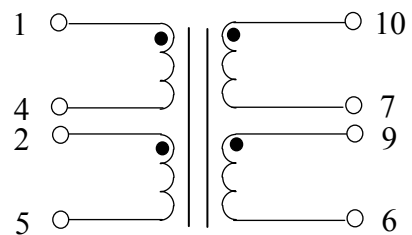


Data sheet subject to change without notice

## Dimension

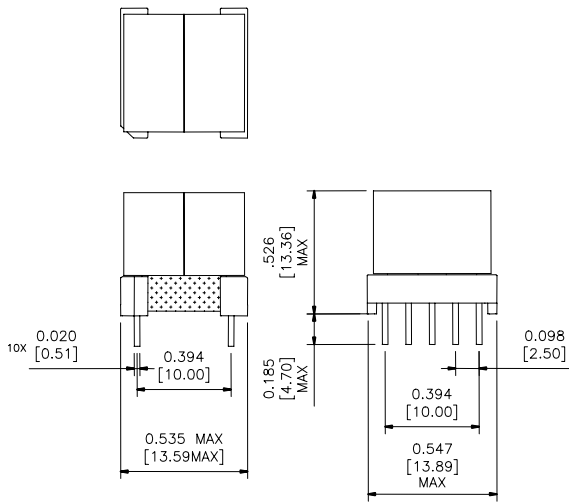

## Schematic

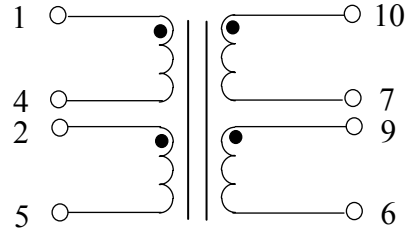

Data sheet subject to change without notice