ISDN-U Interface Transformer



★ **Matched to Leading transceiver ICs**

★ **Designed to meet IR 235^{0}C peak requirement**

★ **Small RM8 Package in THT Type**

Specifications					
Part Number	Application	Inductance (5-7)	Turn Ratio (11-2): (5-7)	DCR (Ω Max)	Hi-Pot (Vac)
UT5004	ISDN-U	25-29mH	1:1.51 (±2%)	(5-7)=6.0 Ω (11-2)= 4.0 Ω	1500

Dimension

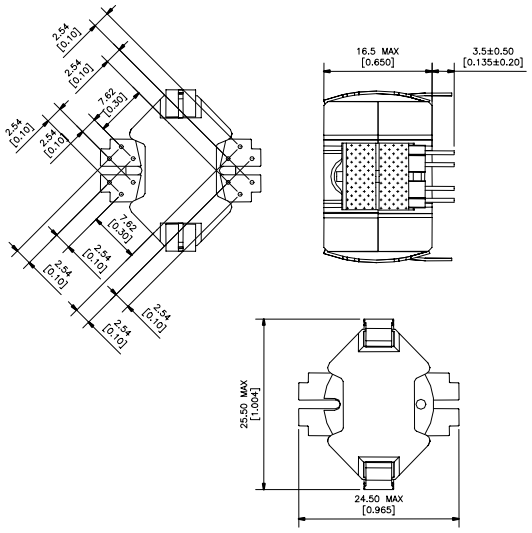

Schematic

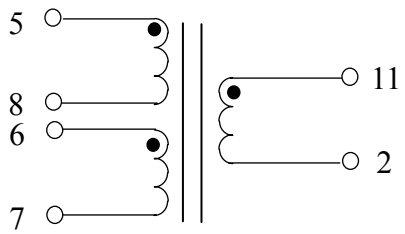

UT5004

Data sheet subject to change without notice

BESTJOB CO., LTD.
www.bestjob.com.tw
sales@bestjob.com

1F., No.5, Alley 7, Lane 301, Sec. 2, Neihu Rd.,
Neihu District, Taipei City 114, Taiwan (R.O.C.)
TEL: 886-2-27948957 FAX: 886-2-27948969