


ADSL Low Pass Filter


- ★ Designed to meet IR 235°C peak requirement
- ★ Excellent THD performance
- ★ Small EP10 Package in SMD Type




Specifications(Operating temperture range:-40°C ~+85°C)				
Part Number	Application	Turn Ratio (±2%) (1-8):(5-4)	OCL (1-8) @ 10KHz, 0.1 V	OCL(1-8) @ 10 KHz, 0.1 V,100mADC
AT0066	ADSL POTS Inductor	1:1	6.0mH ±10%	4.2 mH min

Specifications continue			
Part Number	DCR (1-8)	DCR (5-4)	Isolation Voltage (Vrms)
AT0066	6.0 Ω max	6.0 Ω max	1000

Dimension

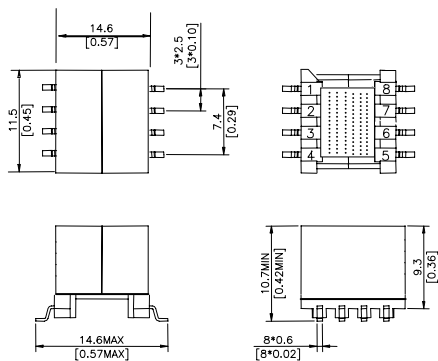

Schematic

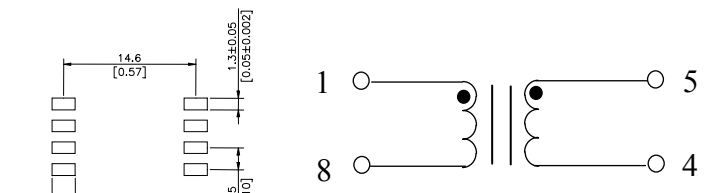

AT0066

Data sheet subject to change without notice