



★ Designed to meet IR 235°C peak requirement for SMD part



★ Excellent THD performance



★ Small EP10 Package in SMD and THT Type

Specifications				
Part Number	Application	Turn Ratio(±2%) (1-3):(2-4):(8-6):(7-5)	OCL(1-4),short(2+3) @ 10 KHz, 0.1 V	Leakage Inductance (1-4),short(2+3)&(5+6+7+8) @ 100 KHz, 0.1 V
AT0061	ADSL	1:1:1:1	100uH ±5%	10uH max
AT5061	ADSL	1:1:1:1	100uH ±5%	10uH max

Specifications continue				
Part Number	DCR (1-4)	DCR (8-5)	Self Resonant Frequency	Isolation Voltage (Vrms)
AT0061	2.2 Ω ±15%	1.8Ω ±15%	4MHz min	1500
AT5061	2.2 Ω ±15%	1.8Ω ±15%	4MHz min	1500

### Dimension

### Schematic

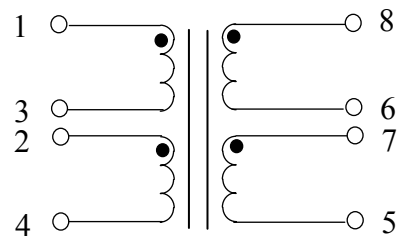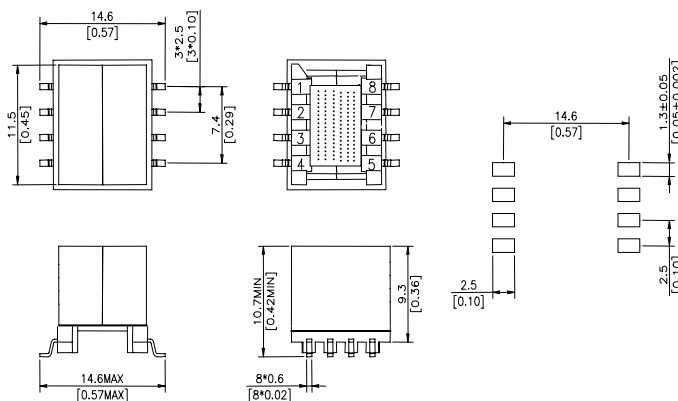

Data sheet subject to change without notice

**Dimension**

**Schematic**

