


★ Designed to meet IR 235^oC peak requirement

★ Excellent THD performance

★ Small EP10 Package in SMD Type





Specifications(Operating temperture range:-40°C ~+85°C)				
Part Number	Application	Turn Ratio (±2%) Line Side:Chip Side	Line Side Inductance (1-4),(2-3)shorted @10 KHz, 0.1 V	Leakage Inductance @ 10 KHz, 0.1 V
AT0068	SMD	1.15:1	475 μH ±5%	8 μH min

Specifications continue				
Part Number	DCR Line Side	DCR Chip Side	Interwinding Cap @100KHz,1V Line Side: Chip Side	Isolation Voltage (Vrms)
AT0068	1.3 Ω max	1.65 Ω max	50pF Max	1500Vac/60s

Dimension

Schematic

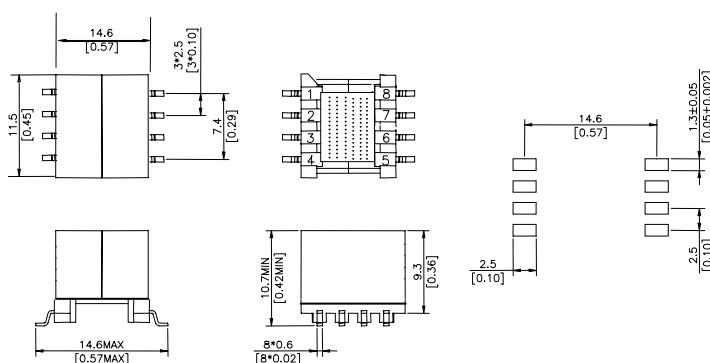

Data sheet subject to change without notice