


★ For use with Globespan GS-7070 Application



★ Designed to meet IR 235°C peak requirement


★ Excellent THD performance

★ Small EP13 Package in SMD Type


Specifications					
Part Number	Application	Turn Ratio (1%) (1-5):(10-6)	OCL @ 10 KHz, 0.1 V (1-5), 2-4 shorted	Leakage Inductance @ 10 KHz, 0.1 V	Longitudinal Balance (from 20 KHz to 1.1 MHz)
AT0024	CPE	1CS:1CS	407.5uH(±5%)	10uH Max	-50dB Min

Specifications continue				
Part Number	THD	DCR ±10% (1-4)/(2-5)/(10-7)/(9-6)	Isolation Voltage (Vrms)	Insertion Loss (@ 772 KHz)
AT0024	-80 dB MIN @ 40 KHz	0.39Ω/0.39Ω/0.33Ω/0.33Ω	1500	0.5 dB Max

Dimension

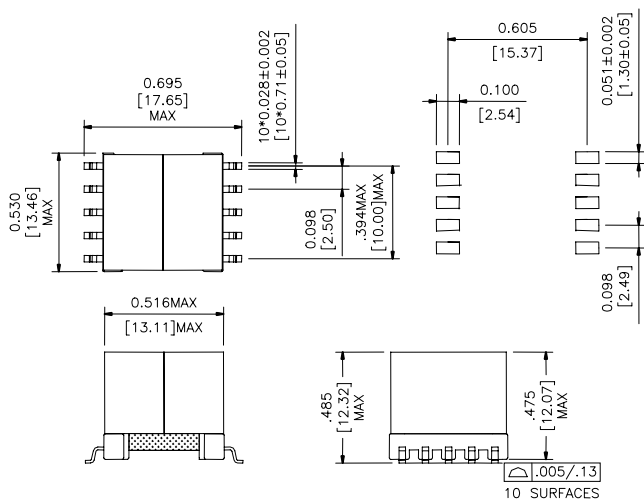

Schematic

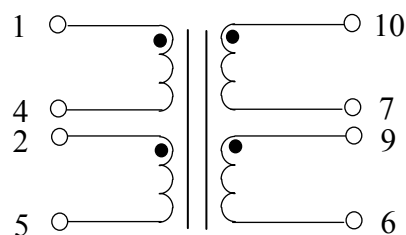

AT0024

Data sheet subject to change without notice