
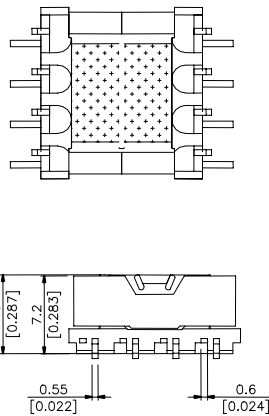


- ★ Meets requirements of IEC60950 for supplementary insulation
- ★ Designed to meet IR 235°C peak requirement  
For SMD Parts
- ★ Low profile Package in SMD Type


Specifications					
Part Number	Application	Turn Ratio (1%) (1-5): (9-7)	OCL @ 10 KHz, 0.1 V (1-5), 2-4 shorted	Leakage Inductance (1-5)(2-4)(7-9)shorted @ 100 KHz, 0.1 V	
DT0012	SMD	4:1	2.07mH(±4%)	15uH Max	

Specifications continue				
Part Number	DCR 1-4/2-5/9-7	Isolation Voltage 500 uA(Vrms)	Insertion Loss (@ 100 KHz)	
DT0012	2.0Ω/2.0Ω/0.3Ω±10%	1850@1sec	0.5 dB Max	

**Dimension**

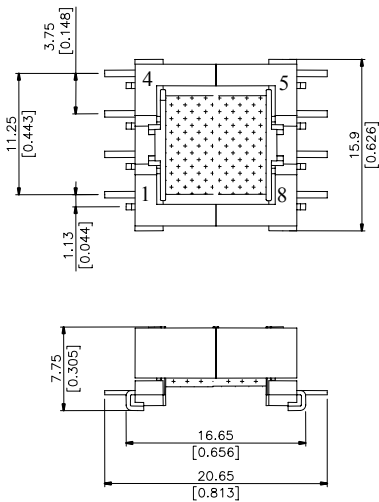

**Schematic**

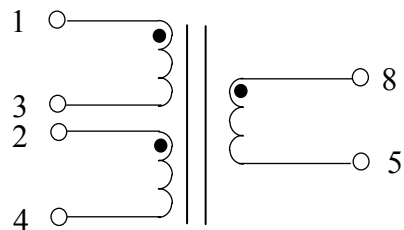

**DT0012**

Data sheet subject to change without notice